


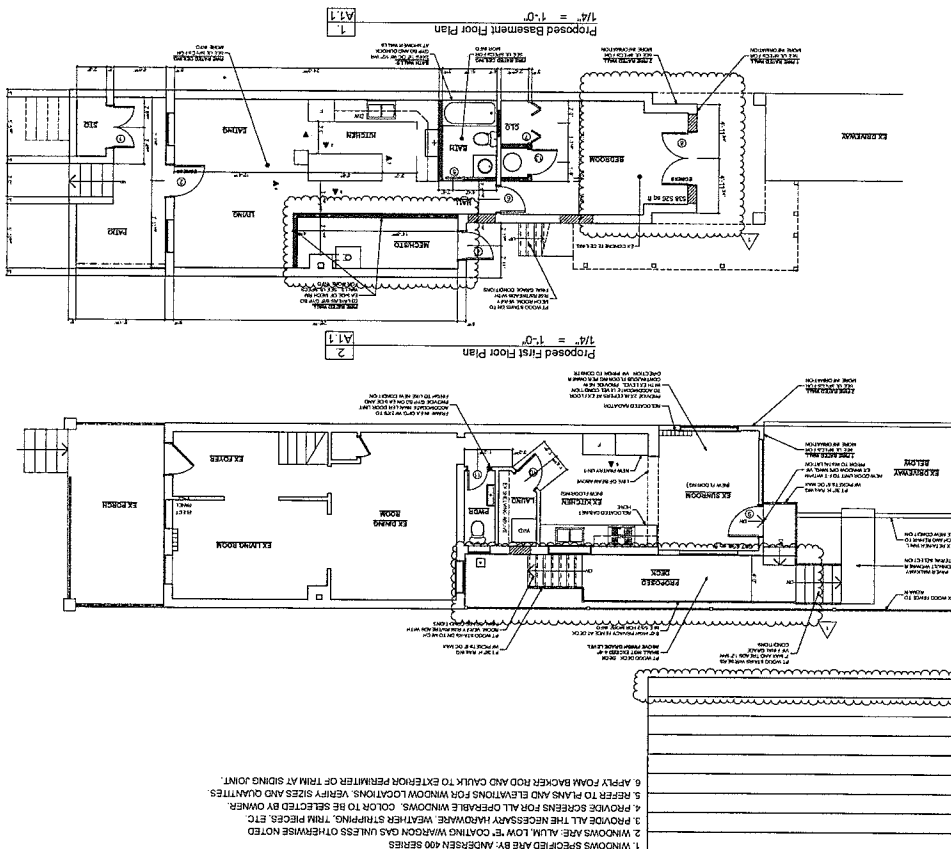



1		Check dimensions for saving directions and locations		Notes	
12	13	2-6	-	1 3/8"	WD
11	12	2-6	-	1 3/8"	WD
10	11	2-0	-	1 3/8"	WD
9	10	2-6	-	1 3/8"	WD
8	9	2-10	-	WDGLS	
7	8	5-0	-	1 3/4"	WDGLS
6	7	6-0	-	WD	
5	6	2-6	-	*	
4	5	2-6	-	*	
3	4	2-6	-	*	
2	3	2-6	-	*	
1	2	2-6	-	*	

2. All door hardware "TO BE SELECTED BY OWNER" unless otherwise noted
3. Exterior doors are by "WeatherShield". Verify with manufacturer prior to install
4. Shop drawings to be submitted to Designer for approval.
5. Rated doors to have compatible equal rated frames.
6. Exterior door U-Factor = .32

[illegible]

2. All door hardware "TO BE SELECTED BY OWNER" unless otherwise noted
3. Exterior doors are by "Weatherhead". Verify with manufacturer prior to install
4. Shop drawings to be submitted to Designer for approval.
5. Rated doors to have comparable equal rated frames.
6. Exterior door U-Factor = .32

2. All door hardware "TO BE SELECTED BY OWNER" unless otherwise noted
3. Exterior doors are by "WeatherShield". Verify with manufacturer prior to install
4. Shop drawings to be submitted to Designer for Approval.
5. Railed doors to have compatible equal railed frames.
6. Exterior door U-Factor = .32

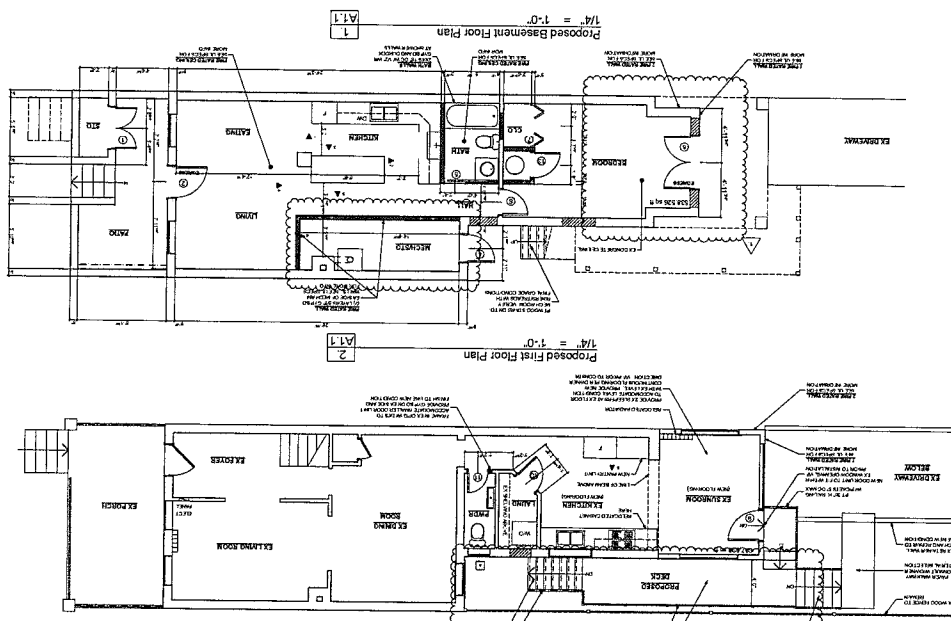

THE CORLEY RES
17 Franklin Street
Washington, DC :


FLORIDA-CENTRAL SYSTEMS WOOD-PLANKED	MOON JOSEPH, SYLVANIA WOOD-PLANKED	MOON JOSEPH, SYLVANIA WOOD-PLANKED	MOON JOSEPH, SYLVANIA WOOD-PLANKED
40042 MOON JOSEPH	40042 MOON JOSEPH	40042 MOON JOSEPH	40042 MOON JOSEPH
1 HOUR	1 HOUR	1 HOUR	1 HOUR
NOON	NOON	NOON	NOON

[illegible]

2. All door hardware **"TO BE SELECTED BY OWNER"**, unless otherwise noted
3. Exterior doors are by "Weathershield". Verify with manufacturer prior to install
4. Shop drawings to be submitted to Designer for approval.
5. Rated doors to have compatible equal rated frames.

[illegible]

1. WINDOWS ARE BY ANDERSEN 400 SERIES
2. WINDOW ARE ALUM. LOW E COATING W/ARGON GAS UNLESS OTHERWISE NOTED
3. PROVIDE ALL NECESSARY HANDRAILS, WEATHER STRIPPING, TRIM PIECES, ETC.
4. PROVIDE SCHEDULE 40 GALV. STEEL, OR EQUIVALENT MATERIALS, COLOR TO BE SELECTED BY OWNER.
5. REFER TO PLANS AND ELEVATIONS FOR WINDOW LOCATIONS
6. APPLY FOAM BACKER ROD AND CAULK TO EXTERIOR PERIMETER OF TRIM AT SINKING JOINTS

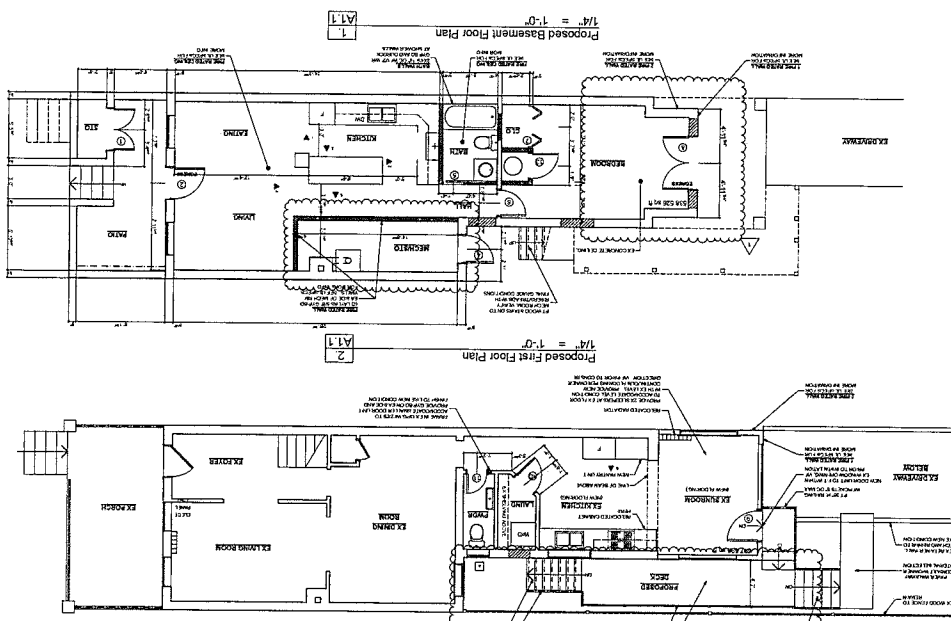

THE CORLEY RES 17 Franklin Street Washington, DC	Proposed Basement Floor Plan, Proposed First Floor Plan, Window Schedule, Door Schedule, UL Specs	 PROJECT NO. _____ DRAWING NO. _____ DATE _____ SCALE _____ SHEET NO. _____ OF _____ TITLE _____ ARCHITECT _____ ENGINEER _____ CONTRACTOR _____ OWNER _____ DESIGNER _____ REVIEWER _____ APPROVED _____ DATE _____ BY _____ FOR _____ PROJECT NO. _____ DRAWING NO. _____ DATE _____ SCALE _____ SHEET NO. _____ OF _____ TITLE _____ ARCHITECT _____ ENGINEER _____ CONTRACTOR _____ OWNER _____ DESIGNER _____ REVIEWER _____ APPROVED _____ DATE _____ BY _____ FOR _____
--	--	--

