

1. NO TITLE REPORT HAS BEEN FURNISHED.
2. BOUNDARY INFORMATION IS BASED ON AN ACTUAL FIELD RUN SURVEY PREPARED BY THIS FIRM.

FROM THE D.C. SURVEYOR'S OFFICE FROM RECORDED PLATS
THE VERTICAL DATUM HAS BEEN TAKEN FROM USGS MAPS.

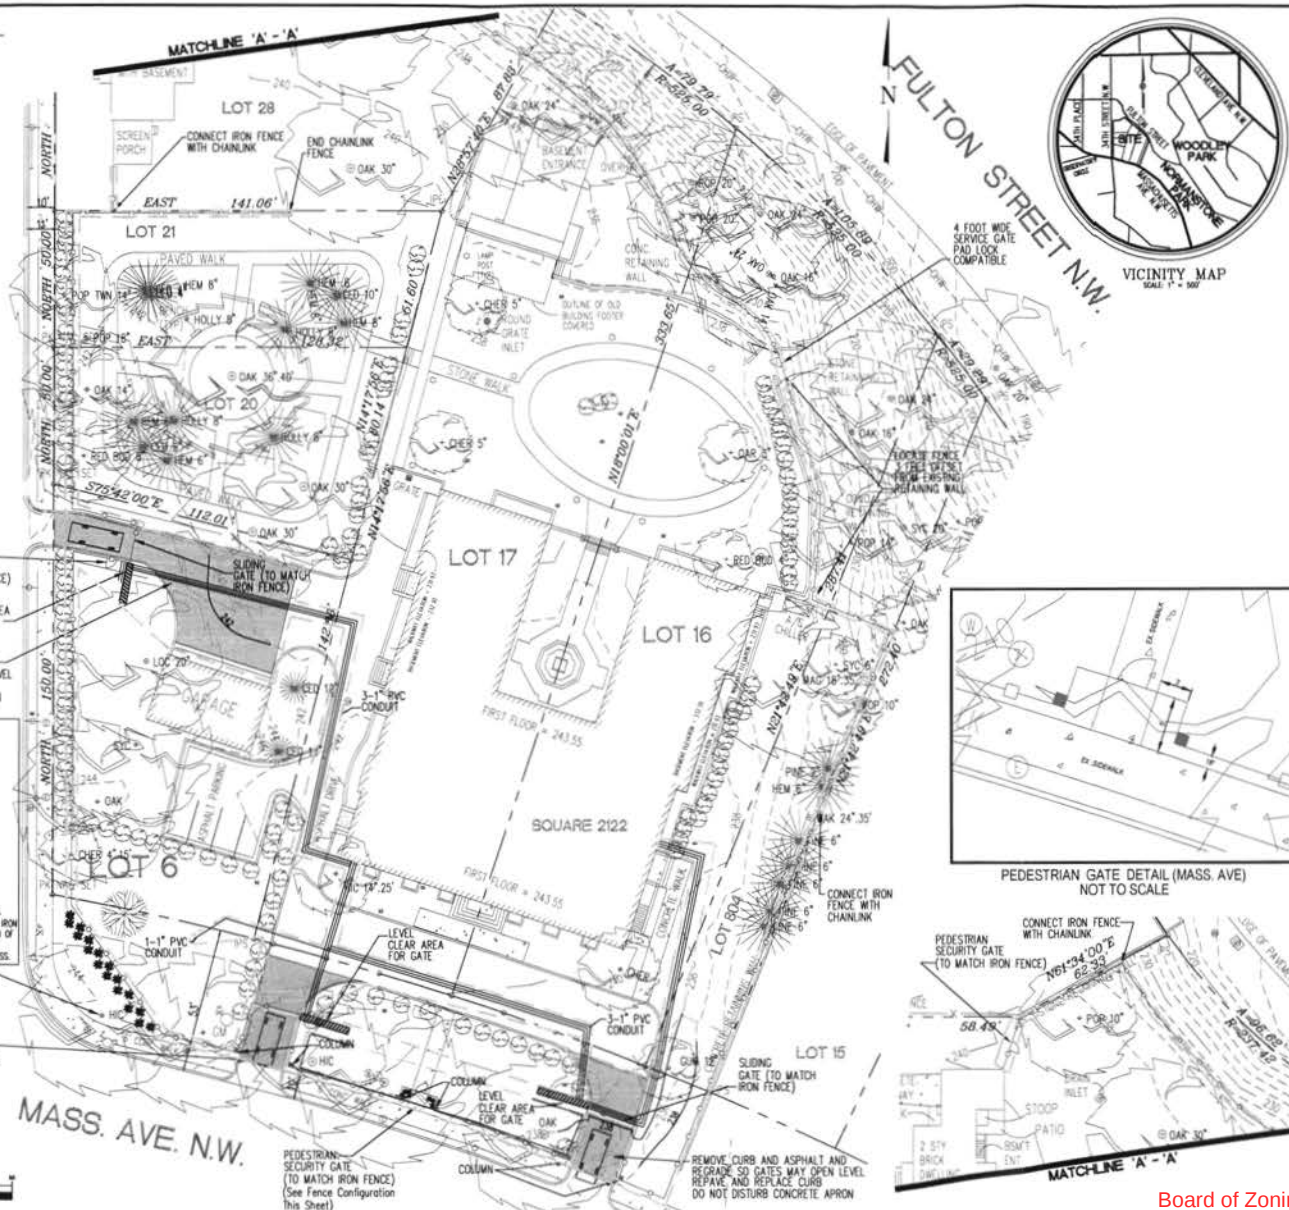
DENOTES IRON PIPE SET
 DENOTES IRON PIPE FOUND
 DENOTES EXISTING
 DENOTES WATER VALVE
 DENOTES GAS VALVE
 DENOTES S.W. RYE
 DENOTES 1/4" PLT. POLE
 DENOTES WELL
 DENOTES FENCE
 DENOTES LIGHT
 DENOTES 3" O.D.
 DENOTES CENTERLINE
 DENOTES NOW OR FORMERLY
 DENOTES IRON PIPE FOUND
 DENOTES IRRIGATION VALVE
 DENOTES MAN HOLE
 DENOTES ELECTRIC MAN HOLE
 DENOTES DRAINAGE MAN HOLE
 DENOTES SANITARY SEWER MAN HOLE
 DENOTES WATER MAN HOLE
 DENOTES FIRE HYDRANT
 DENOTES LIGHT POLE
 DENOTES GAS VALVE
 DENOTES WATER VALVE
 DENOTES TRAFFIC LIGHT
 PROPOSED 6" HIGH IRON FENCE
 PROPOSED 6" HIGH CHAINLINK FENCE
 APPROXIMATE EXTENT OF ASPHALT
 REPAIRS, PATCHES, REPLACEMENT

2. CHAINLINK FENCE TO BE 6 FEET HIGH WITH A BLACK VINYL COATING AND TOP RAIL.
3. CHAINLINK FENCE TO BE 3/8 GAUGE WITH 2" MESH.
4. SLICE GATES TO BE CHAIN DRIVEN WITH LOOP DETECTORS, PHOTO BEAM AND RADIO RECEIVER. TO INCLUDE 1/2" ELECT BUTTER TRANSFORMER, (2) SURFACE MOUNTED TELEPHONE ENTRY SYSTEM.
5. WALK GATE TO HAVE 4"X6" WOOD SURFACE MOUNTED TELEPHONE ENTRY SYSTEM.
6. FENCE TO BE 6" HIGH FENCE WITH 1-1/2" SQUARE TUBES WITH CAPS.
7. HOW FENCE POSTS TO BE 8" O.D.
8. HOW PICKETS TO BE 5/8" SOLID SQUARE FLAT TOP.
9. ALL FENCE POSTS SET IN CONCRETE.
10. PROVIDE POWER TO ALL IRON FENCE GATES.
11. AREAS TO HAVE NEW CHAIN- LINK FENCE ARE TO HAVE A SIX FOOT CLEAR AREA AROUND FENCE DISTURBANCE TO THIS AREA SHALL BE GRADED, SEEDED AND MULCHED AT THE END OF INSTALLATION.
12. ALL CONCRETE WORK TO BE PERFORMED PER C.C. CODE AT ENTRANCES. ALL GRASSY AREAS WITH IRON FENCES AND ENTRANCES THAT HAVE BEEN DISTURBED ARE TO BE RE-SEEDING AT THE COMPLETION OF THE PROJECT.
13. CONTRACTOR MUST PROVIDE ALL ELECTRIC, WATER, AND TOILETS DURING THE CONSTRUCTION PROCESS.

CONTRACTOR TO LOCATE FENCE-
AND FENCE POSTS SO AS NOT
TO DISTURB THE TRUNK OF THE
TREE AND TO HAVE THE LEAST
IMPACT TO THE ROOT SYSTEM

REMOVE CURB AND ASPHALT AND—
REGRADE SO GATES MAY OPEN LEV
REPAVE AND REPLACE CURB
DO NOT DISTURB CONCRETE APRON

FOR LOCATION OF UTILITIES CALL 1-800-257-7777
OR LOG ON TO [HTTP://WWW.MISSUTILITY.NET/ITICS/](http://WWW.MISSUTILITY.NET/ITICS/)
48 HOURS IN ADVANCE OF ANY
WORK IN THIS VICINITY

VICINITY MAP
SCALE: 1" = 100'

CMS
.....
CMS ASSOCIATES LLC
1925 Elia Lane
Billicott City, Maryland 21043
Tel. (410) 988-2436
Contact: Geoffrey L. Chiero, PE
www.cms-engineering.net

VATICAN EMBASSY
REFERENCE INSTALLATION PLAN

SQUARE 2122
LOTS 6, 16, 17, 20, 21, 28 AND 804
WASHINGTON DISTRICT OF COLUMBIA

Board of Zoning Adjustment
District of Columbia
CASE NO.19013
EXHIBIT NO.30A