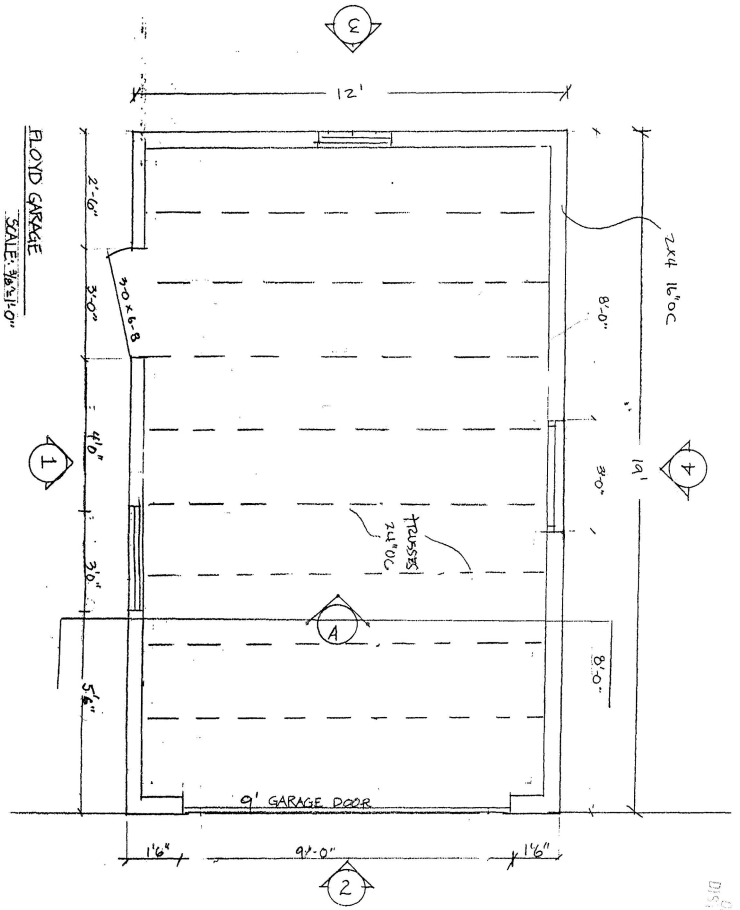


Edgar T. Nunley
Zoning Review Branch
Zoning Division


BZA
Case No. 16628
Exhibit No. 5


2000 MAR 16 PM 4:16


CUSTOMER: FLOYD
DESIGNER: _____ DATE: 1-5-99
CABINET: _____ SCALE: 3/8"=1'


CHESAPEAKE
KITCHEN DESIGN
Residential Kitchens and Additions
4622 WISCONSIN AVE, NW #201
WASHINGTON DC 20016


(202) 244-3590 fax (202) 362-1322



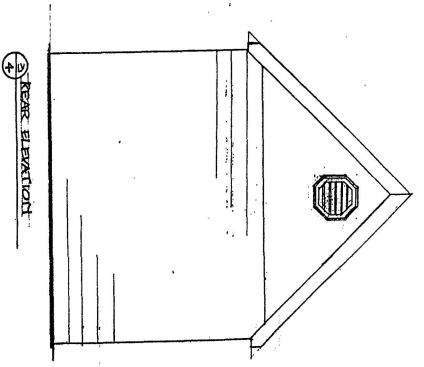

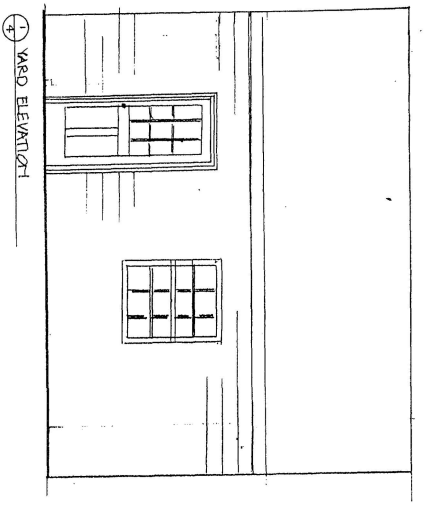

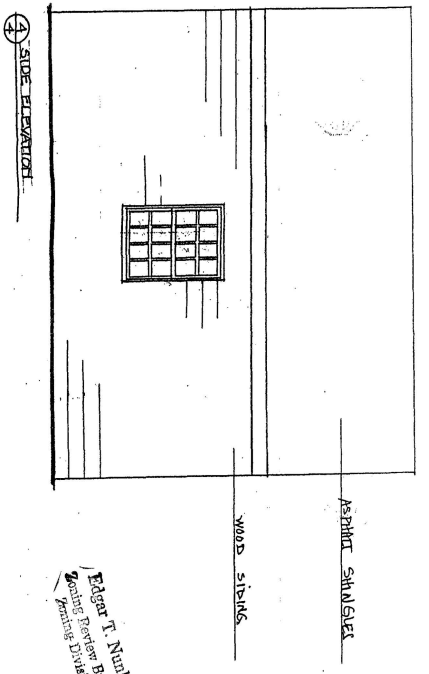

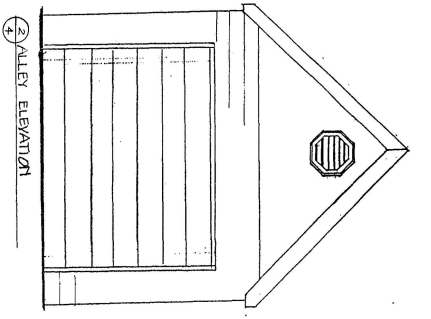

Edgar T. Nunley
Zoning Review Branch
Permits Division


CUSTOMER: FLOYD

DESIGNER: _____ DATE: 1-5-99

CABINET: _____ SCALE: 1/4"=1'

CHESAPEAKE
KITCHEN DESIGN
Residential Kitchens and Additions
4622 WISCONSIN AVE, NW #201
WASHINGTON DC 20016

(202) 244-3590 fax (202) 362-1322



Edgar T. Nunley
Zoning Review Branch
Zoning Division

CHESADEAKE
KITCHEN DESIGN
Residential Kitchens and Additions
4622 WISCONSIN AVE, NW #201
WASHINGTON DC 20016

(202) 244-3590 fax (202) 362-1322

CUSTOMER: FLOYD
DESIGNER: _____ DATE: 1-5-99
CABINET: _____ SCALE: 3/8"=1'

LIST OF STANDARD SYMBOLS

Earth Dike	A-2 / B-3
Straw Bale Dike	SBD
Silt Fence	S — S
Temporary Swale	A-2 / B-3
Stabilized Construction Entrance	SCE
Grade Stabilization Structure	GSS-2 PSD-12
Pipe Slope Drain	GSS-3 PSD-12
Perimeter Dike/Swale	
Inlet Protection	
Diversion	
Grassed Waterway	
Lined Waterway	STONE OR SIMILAR
Rock Outlet Protection	
Subsurface Drain	D — D

EROSION CONTROL NOTES

1. A sediment and erosion control method shall be installed before the start of any excavation and/or construction as per Standards and Specifications for Soil Erosion and Sediment Control for the District of Columbia. If an on-site inspection reveals further erosion control measures are necessary, the same shall be provided. *
2. All debris is to be removed from site.
3. Alley and/or streets/sidewalks shall be swept clean at all times during excavation and construction.
4. All catch basins and drain areas shall be protected during excavation and construction.
5. If any catch basins or drains become clogged as a result of excavation or construction the contractor shall be responsible for its cleaning.
6. When sediment trap/sediment tank has reached 67% capacity, clean out of same is required.
7. Any stockpiling, regardless of location shall be stabilized and covered with plastic or canvas, after its establishment and for duration of the project.
8. After Raze or Demolition, there is the need for groundcover to prevent erosion and sediment runoff from occurring. Such as seed, sod, pave, brickbat or mulch, etc.


SEDIMENT CONTROL APPROVAL

PLAN NUMBER _____

This approval is for grading and Sediment Control only. Permittee/Contractor is required to construct design feature shown hereon. He shall notify this office at number below at least 24 hours before start of grading activity, and within two weeks after completion of project for final inspection.

_____ FLOODING AND EROSION CONTROL SECT...

STRAW BALE DIKE





CONSTRUCTION SPECIFICATIONS

1. BALES SHALL BE PLACED AT THE TOE OF A SLOPE OR ON THE CONTOUR AND IN A ROW WITH ENDS TIGHTLY ABUTTING THE ADJACENT BALES.
2. EACH BALE SHALL BE EMBEDDED IN THE SOIL A MINIMUM OF 4 INCHES, AND PLACED SO THE BINDINGS ARE HORIZONTAL.
3. BALES SHALL BE SECURELY ANCHORED IN PLACE BY EITHER TWO STAKES OR RE-BARS DRIVEN THROUGH THE BALE. THE FIRST STAKE IN EACH BALE SHALL BE DRIVEN TOWARD THE PREVIOUSLY LAID BALE AT AN ANGLE TO FORCE THE BALES TOGETHER. STAKES SHALL BE DRIVEN FLUSH WITH THE BALE.
4. INSPECTION SHALL BE FREQUENT AND REPAIR REPLACEMENT SHALL BE MADE PROMPTLY AS NEEDED.
5. BALES SHALL BE REMOVED WHEN THEY HAVE SERVED THEIR USEFULNESS SO AS NOT TO BLOCK OR SPREAD STORM FLOW OR DRAINAGE.


U.S DEPARTMENT OF AGRICULTURE SOIL CONSERVATION SERVICE COLLEGE PARK, MARYLAND	STRAW BALE DIKE	STANDARD DRAWING SBD-1

32





SILT FENCE



CONSTRUCTION NOTES FOR FABRICATED SILT FENCE

1. WOVEN WIRE FENCE TO BE FASTENED SECURELY TO FENCE POSTS WITH WIRE TIES OR STAPLES.
2. FILTER CLOTH TO BE FASTENED SECURELY TO WOVEN WIRE FENCE WITH TIES SPACED EVERY 24' AT TOP AND MID SECTION.
3. WHEN TWO SECTIONS OF FILTER CLOTH ADJOIN EACH OTHER THEY SHALL BE OVERLAPPED BY SIX INCHES AND FOLDED.
4. MAINTENANCE SHALL BE PERFORMED AS NEEDED AND MATERIAL REMOVED WHEN BULGES DEVELOP IN THE SILT FENCE.

POSTS: STEEL EITHER T OR U TYPE OR 2" HARDWOOD

FENCE: WOVEN WIRE, 14½ GA. 6" MESH OPENING

FILTER CLOTH: FILTER X, MIRAFI 100X, STABILINKA T140N OR APPROVED EQUAL


PREFABRICATED UNIT: GEOFAB, ENVIROFENCE, OR APPROVED EQUAL

U.S DEPARTMENT OF AGRICULTURE SOIL CONSERVATION SERVICE COLLEGE PARK, MARYLAND	SILT FENCE	STANDARD DRAWING SF-1

27

STABILIZED CONSTRUCTION ENTRANCE

not to scale




CONSTRUCTION SPECIFICATIONS

1. Stone Size - Use 2" stone, or reclaimed or recycled concrete equivalent.
2. Length - As required, but not less than 50 feet (except on a single residence lot where a 30 foot minimum length would apply).
3. Thickness - Not less than six (6) inches.
4. Width - Ten (10) foot minimum, but not less than the full width at points where ingress or egress occurs.
5. Filter Cloth - Will be placed over the entire area prior to placing of stone. Filter will not be required on a single family residence lot.
6. Surface Water - All surface water flowing or directed toward construction entrances shall be piped across the entrance. If piping is impractical, a mountable berm with 5:1 slopes will be permitted.
7. Maintenance - The entrance shall be maintained in a condition which will prevent tracking or flowing of sediment onto public rights-of-way. This may require periodic top dressing with additional stone as conditions demand and repair and/or clean out of any measures used to trap sediment. All sediment spilled, dropped, washed or tracked onto public rights-of-way must be removed immediately.
8. Washing - Wheels shall be cleaned to remove sediment prior to entrance onto public rights-of-way. When washing is required, it shall be done on an area stabilized with stone and which drains into an approved sediment trapping device.
9. Periodic inspection and needed maintenance shall be provided after each rain.


U. S. DEPARTMENT OF AGRICULTURE SOIL CONSERVATION SERVICE College Park, MD	STABILIZED CONSTRUCTION ENTRANCE	Standard Drawing SCE-1

35

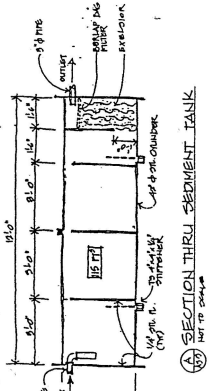


NOTES:
1. ALTERNATE CONFIGURATION: A PONDING AREA 6'LONG WITH 5 CU.YARDS CAPACITY FOR EACH CUBIC FOOT OF FLOW TO A WITH 67% CAPACITY OF TANK, CLEAN TANK OF ALL SILT.





Edgar T. Nunley
Zoning Review Branch
Zoning Division

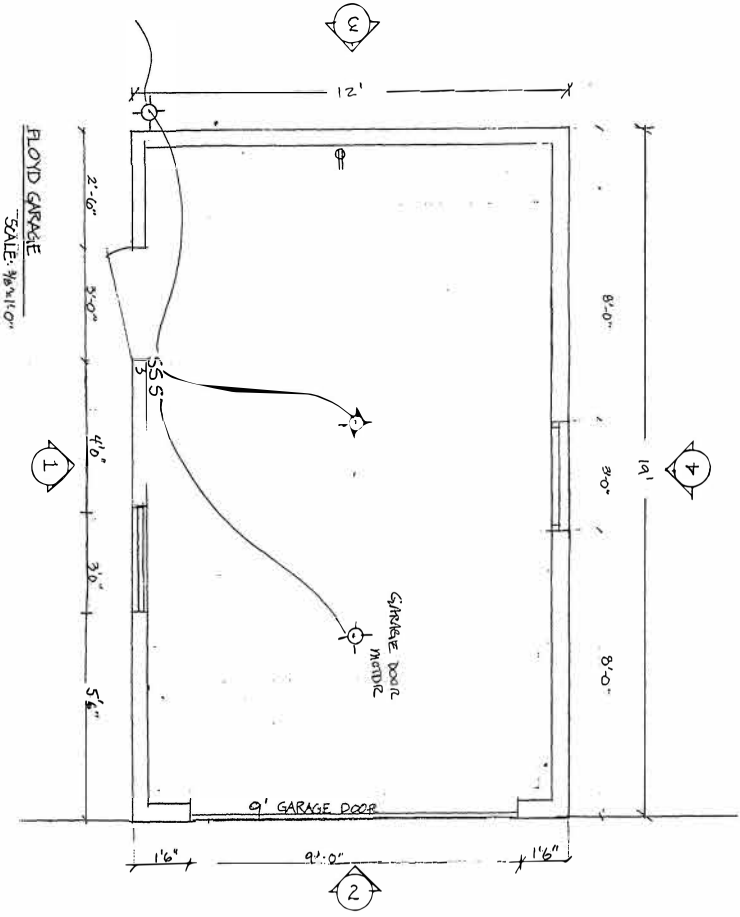

Edgar T. Nunley
Zoning Review Branch
Zoning Division

CUSTOMER: FLOYD - ELECTRIC

DESIGNER: EMRAN DATE: 1-5-99

CABINET: _____ SCALE: 1/2"=1'

CHESAPEAKE
KITCHEN DESIGN
Residential Kitchens and Additions
4622 WISCONSIN AVE, NW #201
WASHINGTON DC 20016

(202) 244-3590 fax (202) 362-1322

