


Figure 3-B3-1
Typical Location of Underground Utilities
Streets with Single Water and Sewer Services

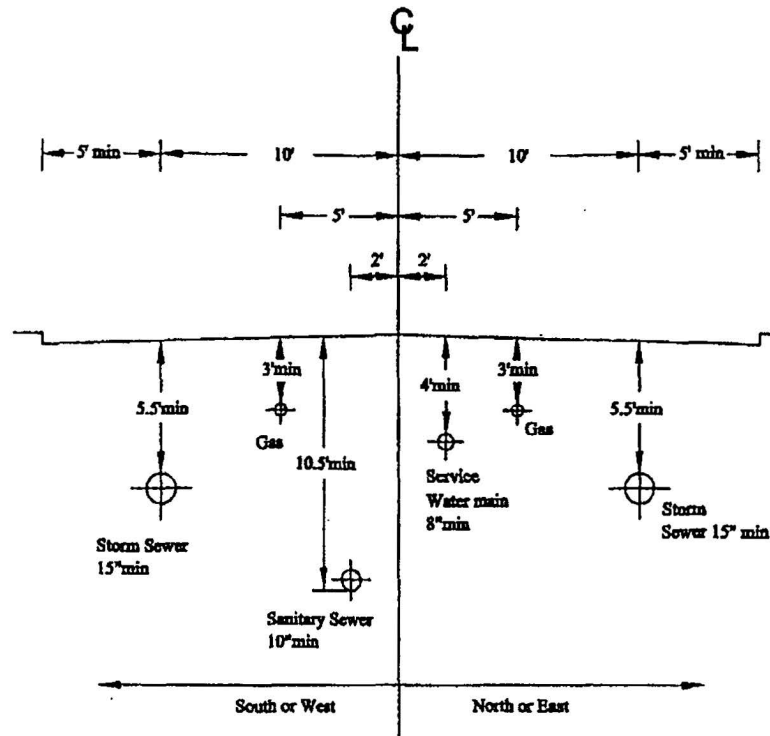

Note: Locations of Telephone and Electric Services
 not Standard

3.3.2. Service Sanitary Sewers

The location of service sanitary sewers depends on the width of the street. If the street right-of-way is 90 feet wide or less, only one sanitary sewer is required to service the lots, and the service sanitary sewer will be located two feet to the south or west of the centerline of the street as shown on Figure 3-B3-1.

If the street right-of-way is wider than 90 feet, in order to keep the length of the sewer service connection to 50 feet or less, the lots are usually served by dual sanitary sewers, one on each side of the street. As shown on Figure 3-B3-2 dual sanitary sewers are centered on the back block of the sidewalk if not occupied by another utility.

There are occasions where a large water main may exist in a street 90 feet wide or less