DRAFT

Connecticut Avenue Transportation Study

Draft Final Report



Prepared by:
DMJM+HARRIS, Inc.
for:
District Department of Transportation
District of Columbia

June 2003

BZA
Case No. 17022
Exhibit No. 62A

Board of Zoning Adjustment
District of Columbia
CASE NO. 17022
EXHIBIT NO. 62A2

TABLE OF CONTENTS

EXECUTIVE SUMMARY ES-1

I. INTRODUCTION 1

II. EXISTING CONDITIONS 3

EXISTING TRANSPORTATION FEATURES 3
Major Roadways in the Study Area 3
Public Transportation 8
TRAFFIC VOLUMES 10
SPEED AND TRAVEL TIMES 19
ORIGIN-DESTINATION PATTERNS IN THE STUDY AREA 25
Data Collection for Origin-Destination Survey 25
Data Processing for Origin-Destination Survey 25
Trip Matrices and Findings of Origin-Destination Surveys 27
SAFETY 34
QUEUES AT CRITICAL INTERSECTIONS 36
PARKING INVENTORY 38
EXISTING LEVELS OF SERVICE 40

III. FUTURE CONDITIONS 44

BACKGROUND GROWTH 44
Background Traffic Volumes 44
Levels of Service with Background Traffic 44
DEVELOPMENT TRAFFIC 49
Trip Generation for Other Area Developments 49
Trip Distributions and Assignments for Area Developments 51
TOTAL TRIP ASSIGNMENTS 51
Site Impacts 56
Future Levels of Service with Development Traffic 57

IV. ISSUES AND RECOMMENDED IMPROVEMENTS 60

V. SUMMARY OF FINDINGS AND RECOMMENDATIONS 87

TRANSPORTATION ISSUES 87
TRANSPORTATION IMPROVEMENT RECOMMENDATIONS 87

LIST OF FIGURES

FIGURE

1. Study Area 2
2. Existing (2002) Peak Period Lane Configurations 4
3. Generalized Land Use Map 6
4. Public Transit 9
5. Location of Turning Movement Counts 11
6. 2002 Existing Weekday Peak Hour Volumes 13
7. 2002 Existing Weekday Evening (6:30 – 7:30 PM) Volumes 14
8. 2002 Existing Saturday Peak Hour Volumes 15
9. 2002 Existing Weekday Peak Hour Pedestrian Volumes 16
10. 2002 Existing Weekday Evening (6:30 – 7:30 PM) Pedestrian Volumes 17
11. 2002 Existing Saturday Peak Hour Pedestrian Volumes 18
12. AM Peak Period Travel Times 23
13. PM Peak Period Travel Times 24
14. License Plate Survey Locations for Origin-Destination Study 26
15. AM License Plate Distribution 30
16. PM License Plate Distribution 33
17. Observed Queues at Studied Intersections 37
18. Daytime Parking Restrictions 39
19. Existing AM and PM Peak Hour Levels of Service (LOS) 41
20. Existing Evening and Saturday Peak Hour Levels of Service (LOS) 43
21. 2012 Weekday Peak Hour Background Volumes 45
22. 2012 Weekday Evening (6:30-7:30 PM) and Saturday Peak Hour Background Volumes 46
23. AM and PM Peak Hour Levels of Service (LOS) with Background Traffic 47
24. Evening and Saturday Peak Hour Levels of Service (LOS) with Background Traffic 48
25. 2012 Weekday Peak Hour Site Traffic Volumes 52
26. 2012 Weekday Evening (6:30-7:30 PM) and Saturday Peak Hour Site Traffic Volumes 53
27. 2012 Total Weekday Peak Hour Traffic Volumes 54
28. 2012 Total Weekday Evening (6:30-7:30 PM) and Saturday Peak Hour Traffic Volumes 55
29. AM and PM Peak Hour Levels of Service (LOS) with Total Traffic 58
30. Existing Evening and Saturday Peak Hour Levels of Service (LOS) with Total Traffic 59
31. Transportation Issue Locations 61
32. Truck Restrictions 76
33. Recommended Improvements to Connecticut Avenue and Tilden Street 77
34. Van Ness Alley Counts - AM Peak Period 80
35. Van Ness Alley Counts - PM Peak Period 81
36. Van Ness Alley Improvements 82
37. Recommended Improvements to Connecticut Avenue and Windom Place 83
38. Recommended Improvements to 36th Street 86
39. Transportation Issues and Recommendations 88

LIST OF TABLES

TABLE

1. Average Travel Speeds Between Selected Locations 22
2. Total Origin-Destination Trips During the AM Peak Hours (6:45 AM – 9:15 AM) 28
3. Total Origin-Destination Trips During the AM Peak Hours (6:45 AM – 9:15 AM) as Percentage of Exit Volumes 29
4. Total Origin-Destination Trips During the PM Peak Hours (3:00 PM – 5:30 PM) . 31
5. Total Origin-Destination Trips During the PM Peak Hours (3:00 PM – 5:30 PM) as Percentage of Exit Volumes 32
6. Summary of Accident Data 35
7. Summary of AM and PM Peak Hour Trip Generation for Area Developments 50
8. Summary of Evening and Saturday Peak Hour Trip Generation for Area Developments 50
9. Impact of Site Traffic on Area Intersections 56
10. Transportation Issues and Improvements 62

10A. Connecticut Avenue and Van Ness Street 78

10B. 36th Street between Reno Road and Yuma Street 84

11. LOS Comparison Table with Optimized Signal Timings and Recommended Improvements 90

LIST OF CHARTS

CHART

1. Weekday Hourly Distribution of Vehicular Trips – Connecticut Avenue North of Veazey Terrace 20
2. Saturday Hourly Distribution of Vehicular Trips – Connecticut Avenue North of Veazey Terrace 21

LIST OF APPENDICES

APPENDIX

A. Scope of Work
B. Traffic Count Data
C. Recorded Speeds for Studied Segments in the Study Area
D. Accident Data
E. Parking Inventory Data
F. Description of Level of Service for Signalized and Unsignalized Intersections
G. Unadjusted Origin-Destination Matrices from the Origin-Destination Study
H. Trip Generation - Area Developments
I. Optimized Signal Timings
J. Connecticut Avenue Reversible Lane Study
K. Citizens' Comments
L. Preliminary Planning Cost Estimate


EXECUTIVE SUMMARY

In response to residents' concerns, the District of Columbia Department of Transportation (DDOT) conducted a study that evaluated transportation conditions in the Van Ness area of Connecticut Avenue.

Study Area

The study area is located in northwest Washington, DC and is shown in Figure ES-1.

Figure ES-1 – Study Area Map

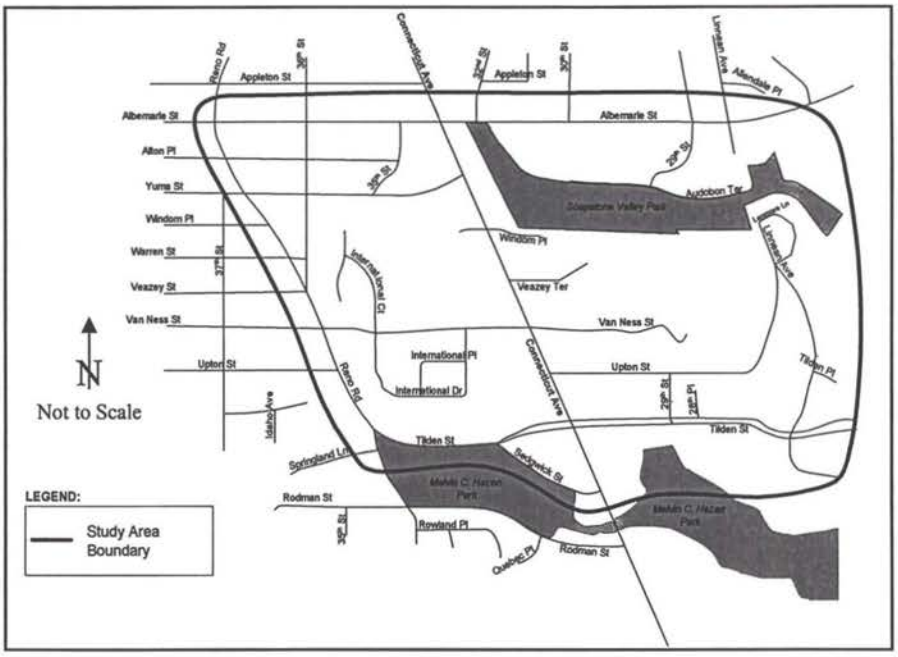

The major roadways in the Study Area are Connecticut Avenue, Reno Road, Albemarle Street, Van Ness Street and Tilden Street.

Mass Transit Service

The Washington Metropolitan Area Transit Authority provides extensive bus and rail service in the study area. The Van Ness-UDC Metrorail station, served by the Red line, is located on Connecticut Avenue at Veazey Street.

Traffic Volumes

Connecticut Avenue is the most traveled road in the study area, with approximately 40,000 vehicles using it daily. Approximately 11,000 vehicles use Connecticut Avenue on Saturdays. Pedestrian volumes are high throughout the study area. The intersections in the study area with the highest turning movement volumes can be found along Connecticut Avenue, with the intersection of Van Ness Street and Connecticut Avenue the highest overall.

Traffic levels on Connecticut Avenue during the AM peak hour are higher than the traffic during the PM peak hour. During the weekday AM peak period, traffic between 8:00 AM to 9:00 AM is consistently higher than during other hours of the peak period. Weekday peak traffic conditions during the PM peak period are maintained over a period of several hours. The peak period for Saturdays is between 12:00 PM and 6:00 PM with volumes relatively constant throughout this entire peak period.

Between the hours of 7:00 AM and 7:00 PM, the classification data indicates that Connecticut Avenue volume is approximately two percent heavy vehicles. On Van Ness Street west of Connecticut Avenue, approximately six percent of average weekday traffic is comprised of heavy vehicles.

Safety

The Study Team found that the reversible lane operation is a safety issue. Many drivers were observed driving against traffic on the reversible lane. The intersection of Connecticut Avenue and Tilden Street is the location with the largest number of accidents in the study area.

Speeds

Average peak hour speeds on the studied corridors are well below posted speed limits, due to heavy traffic volumes and numerous traffic signals, particularly on Connecticut Avenue. However, there are individual sections on most studied roadways where average peak hour speeds are well above the posted limits.

Origin-Destination Survey

The Study Team conducted and origin-destination survey to assess the patterns of vehicles traversing the study area. The most significant findings of the origin-destination survey are the following:

- Approximately half of the vehicles destined for the study area enter via Connecticut Avenue at Albemarle Street during the AM peak hours.
- The majority of vehicles traveling south through the study area during the AM peak hours are from Maryland.
- During the PM peak hours, approximately one-third of the vehicles exiting the study area begin their trips within the study area.

Parking

Parking availability is adequate throughout most of the study area. During the times when parking is not allowed on Connecticut Avenue (7:00 – 9:30 AM and 4:00 – 6:30 PM), parking utilization on the streets adjacent to Connecticut Avenue is high.

Traffic Operations

During the AM and PM peak hours, all intersections on Connecticut Avenue operate at level of service (LOS) D or better. This indicates that traffic volumes are approaching the capacity of these intersections, but they are still performing acceptably. During weekday evenings (6:30 – 7:30) two intersections on Connecticut Avenue operate at LOS E. The reduced level of service is due to the parking that is permitted in the curb lanes of Connecticut Avenue beginning at 6:30 PM.

On Saturdays, the intersections on Connecticut Avenue operate at LOS D or better. However, there are significant delays due to the friction resulting from vehicles parking and exiting and entering the commercial establishments along Connecticut Avenue.

Future Conditions

In order to assess future conditions, the Study Team collected information on new or proposed developments in the study area. The primary source of information on these developments was the District of Columbia Office of Planning. The Study Team identified three new or proposed developments within the study area: 3883 Connecticut Avenue, a newly opened residential development; a proposed expansion of the Edmund Burke School at 2955 Upton Street; and a proposed expansion of the Sheridan School at 4400 36th Street. The Study Team found that projected traffic associated with these developments is expected to have a negligible impact on traffic operations within the study area, but current high traffic volumes throughout the area, combined with the expected 1.0 percent per year increase in regional traffic will create a demand for mitigation measures to improve traffic operations.

Transportation Issues

The Study Team, with the assistance of area residents, conducted an extensive field evaluation of the transportation infrastructure in the study area. The Study Team identified area-wide transportation issues as well as issues on and around Connecticut Avenue, Tilden Street, Van Ness Street, Reno Road, Yuma Street and 36th Street. These issues are concerned with, but not limited to, vehicular operations, transit service, pedestrian safety and school operations. Detailed descriptions of the transportation issues are presented in the study. In addition, short- and long-term recommendations were made for improvements to these issues. Figure ES-2 summarizes transportation issues and recommended improvements within the study area. Appendix L provides a prioritization scheme and cost estimates for the recommended improvements. The District Department of Transportation will conduct a final evaluation and will begin implementation of the recommended improvements after the conclusion of the study.

I. INTRODUCTION

In response to residents' concerns, the District of Columbia Department of Transportation (DDOT) conducted a study that evaluated transportation conditions in the Van Ness area of Connecticut Avenue in the District. The consulting firm DMJM+HARRIS, Inc. (Consultant) conducted the study with assistance from DDOT staff. In this report the team of Consultant and DDOT staff is referred to as the "Study Team."

As detailed in the Scope of Work presented in Appendix A, the main goals of the study were to assess existing traffic conditions in the study area and make recommendations to improve mobility, traffic safety and compliance with speeding regulations, as well as pedestrian and bicycle safety.

The study area, shown in Figure 1, focuses on Connecticut Avenue and is bounded by the following corridors:

- Albemarle Street to the north
- Tilden Street to the south
- Reno Road to the west
- Linnean Avenue to the east

The study was conducted with assistance from area residents. The Study Team held two meetings with area residents to discuss transportation issues and potential improvement options. Area residents provided additional input via e-mail and regular correspondence. Input from residents was helpful in the identification of key transportation issues noted in this report and in the development of mitigation measures with respect to transportation improvements. The Washington DC Office of Planning provided additional information to the Study Team.

This report summarizes the assessment of existing and future transportation conditions, identifies transportation issues, presents an evaluation of proposed improvements, and describes the improvements that are recommended for implementation in the study area. The existing conditions section of this report includes a description of the major roadways in the study area; information on traffic volumes at critical intersections; travel speeds throughout the study area, origin-destination patterns; accidents, queues, and level of service at critical intersections. It also describes the conditions of existing pedestrian facilities and public transportation.

The future transportation conditions section of this report includes an assessment of proposed development, future year travel forecasts and levels of service for the year 2012. The following section describes the identified transportation issues and presents recommended improvements for traffic, pedestrian and public transit operation. The last section of the report presents a summary of findings and recommendations.

II. EXISTING CONDITIONS

EXISTING TRANSPORTATION FEATURES

The Study Team conducted an extensive data collection effort to gain an understanding of existing conditions in the study area. In addition to collecting data for the quantitative assessment of existing conditions, the Study Team conducted field evaluations throughout the study area during peak and off-peak hours to further assist in the assessment of existing conditions. This section of the report summarizes the data collected for the study and addresses issues and deficiencies in the transportation infrastructure.

MAJOR ROADWAYS IN THE STUDY AREA

The study area is located in Northwest Washington, DC and is shown in Figure 1. The following are the major roadways in the study area:

- Connecticut Avenue
- Reno Road
- Tilden Street
- Albemarle Street
- Van Ness Street


While some of the studied roadways continue beyond the above terminals, their associated characteristics will only be described within these limits.

Connecticut Avenue


Connecticut Avenue[1] is a two way major arterial[2] running north-south through the study area. There is a total of six lanes on Connecticut Avenue with a reversible lane in operation during the AM and PM peak periods. As shown in Figure 2, Connecticut Avenue operates with four southbound and two northbound lanes during weekdays from 7:00-9:30 AM and four northbound and two southbound lanes during weekdays from 4:00-6:30 PM. No parking is allowed on Connecticut Avenue during AM and PM reversible lane operation. During off peak hours and weekends, Connecticut Avenue operates as two-lanes in each direction with parking allowed on both sides of the road. There are parking meters on both sides of Connecticut Avenue from Albemarle to Van Ness Street and on the west side of Connecticut from Van Ness to Tilden Street. The posted speed limit is 30 mph. There is no median on Connecticut Avenue.

[1] All streets in the study area are located in the northwest quadrant of the District. Therefore, throughout this report where the NW designation is omitted, it should be understood that the street is located in the northwest quadrant of the District.

[2] All roadway classifications were taken from the District of Columbia Functional Classification Map, January 1, 2002.

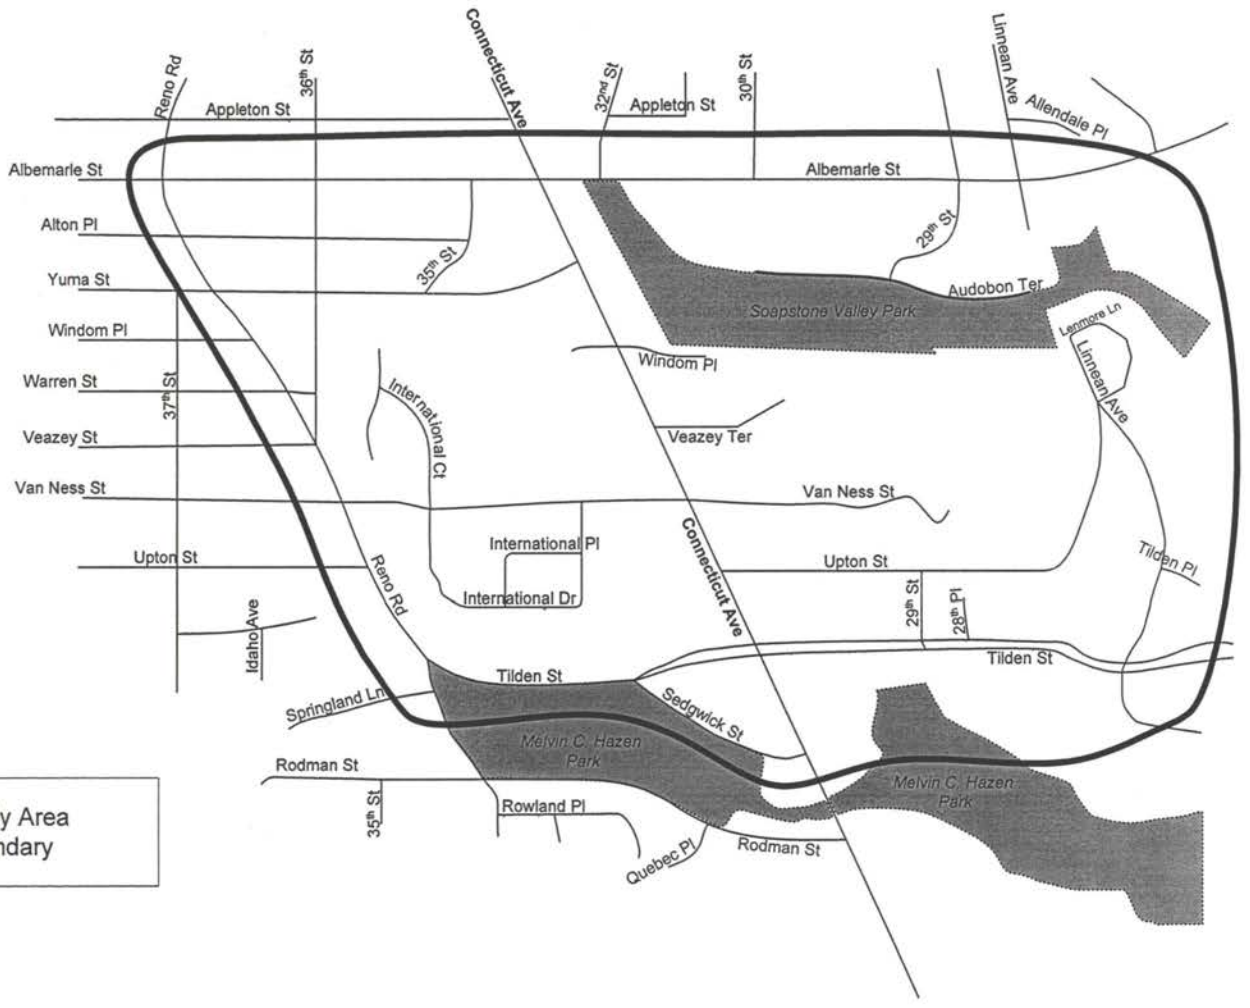


Scale: 1" = 785'		Connecticut Avenue Transportation Study	Study Area	FIGURE 1
June 2003				

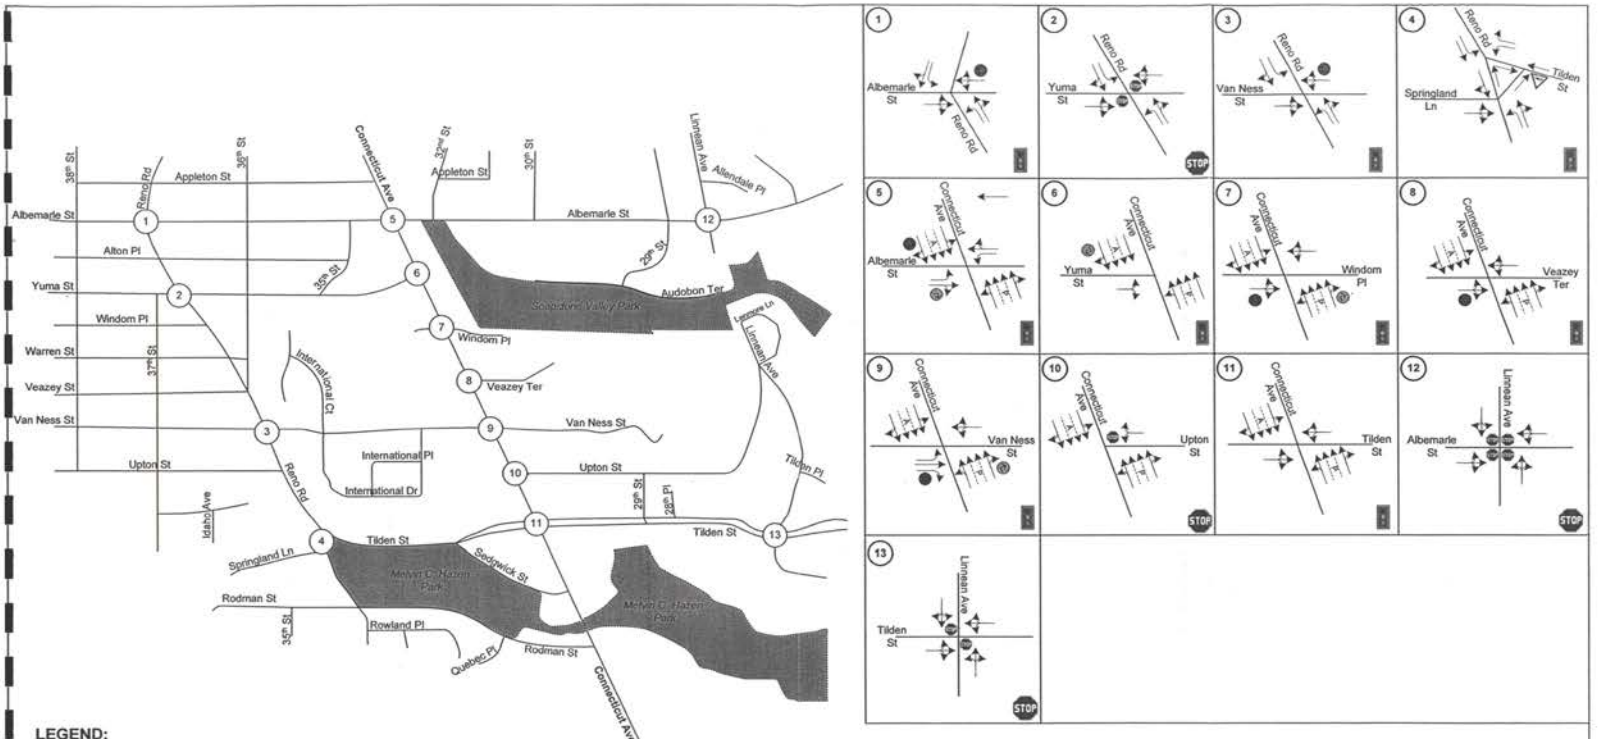

LEGEND:

- Signalized Intersection
- Unsignalized Intersection with Stop Sign
- Unsignalized Intersection with Yield Sign
- AM/PM Lane Available During AM or PM Peak Period
- No Turn on Red, 7 AM - 7 PM
- No Turn on Red

Scale: 1" = 785' June 2003	N	Connecticut Avenue Transportation Study	**Existing (2002)** **Peak Period Lane Configurations**	**FIGURE 2**

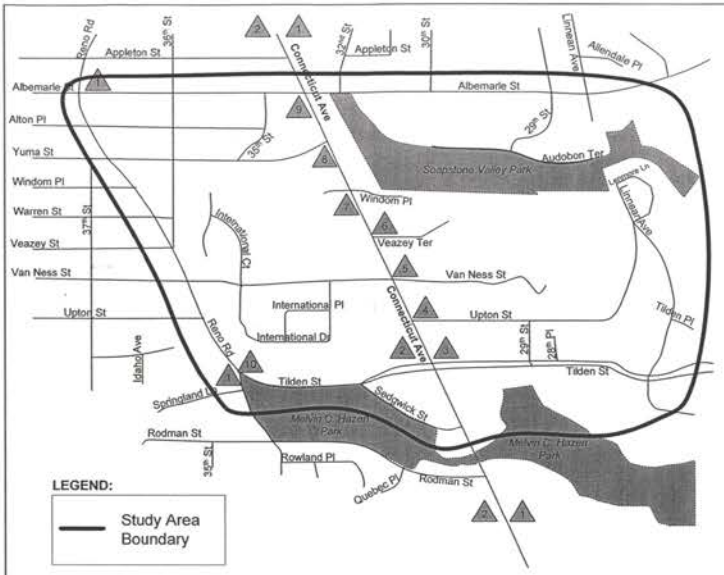

No.	ISSUES	RECOMMENDATIONS
1)	A. Truck route restriction violations	Increased enforcement
	B. Traffic signal timings are not optimized	Optimize signal timings
2)	A. Evening (after 6:30 PM) congestion	Prohibit Connecticut Avenue parking until 7:00 PM throughout the length of the reversible lane section of Connecticut Avenue
	B. Safety of reversible lane operation	**Long-term:** Implement a system of overhead lane control signals
	C. Pedestrian safety crossing Connecticut Avenue	Increase the number of signs for the pedestrian underpass at the Van Ness Metro station, raising pedestrian awareness
	D. Buses traveling on Connecticut Avenue cannot keep to their schedules because of traffic congestion downtown.	I. Run peak period shuttle bus service for WMATA routes L1, L2 and L4 between the Van Ness Metro station and Chevy Chase Circle. II. L1, L2, L4 shuttles should loop to and from Connecticut Avenue via Tilden Street, Reno Road and Van Ness Street
	E. Pedestrian-vehicle conflicts on Connecticut Avenue	I. Remove the damaged "Yield to Pedestrians while Turning" sign on the westbound approach of Tilden Street to Connecticut Avenue II. Install "Yield to Pedestrians in Crosswalk" signs at all signalized intersections on Connecticut Avenue

Note:
All improvements are short-term unless otherwise noted

No.	ISSUES	RECOMMENDATIONS
3)	A. Westbound traffic congestion on Tilden Street	**Short-term:** Eliminate westbound parking on Tilden between the alley located east of Connecticut Avenue and Connecticut Avenue to create a right turn lane. Add westbound overlap for right turns
		Long-term: Construct 100' westbound left turn lane from median
	B. Difficult northbound left turns	Optimize signal timings
	C. Condition of crosswalks	Restripe east crosswalk across Tilden
4)	Large number of accidents/difficult left turn maneuver at Upton St and Connecticut Avenue	Prohibit left turns from Upton to Connecticut at all times
5)	A. Speeding and congestion in the alley between Van Ness Street and Veazey Terrace	I. Convert the alley to one-way southbound operation II. Install speed humps Provide two-way access for vehicles from the loading dock north (see Figure 36)
	B. Pedestrian-vehicle conflicts due to large numbers of pedestrians crossing Van Ness Street and a large number of southbound right turns.	Prohibit right turns on red from Connecticut to Van Ness at all times
	C. Missing pavement markings	Stripe eastbound Van Ness as left, through and right lanes.
	D. Vehicular congestion on eastbound Van Ness Street at Connecticut Avenue	I. Add eastbound overlap for right turns. Right turns will be protected when northbound Connecticut Avenue enters the advance green phase II. Add eastbound protected left turn phase
	E. Southbound right turns affect southbound through traffic	Eliminate two parking spaces on southbound Connecticut Avenue to create a short right-turn lane
	F. Difficulty making southbound left turns	Optimize signal timing
6)	A. Pedestrian safety in the vicinity of Connecticut Avenue	I. Extend pedestrian crossing times II. Replace pedestrian crossing sign on Veazey Terrace east of Connecticut Avenue. Restripe existing crosswalk.
7)	A. Congestion on Windom Place and Connecticut Avenue due to DC School District bus drop off and pick up for ETS and Rock Creek Academy.	I. Coordinate with ETS and Rock Creek Academy to arrange for off-site consolidation of students into fewer buses II. Reserve parking spaces in 4400 block of Connecticut Avenue during school dismissal hours so PM operations do not take place on Windom Place. AM operations should be allowed to continue on Windom Place
	B. Pedestrian safety: inadequate crosswalks, missing pedestrian signals, lack of pedestrian phase in every cycle at Windom Place and Connecticut Avenue	I. Install pedestrian signals on the east side of the intersection II. Operate signals in pre-timed mode. Remove pedestrian pushbuttons III. Restripe crosswalks across Windom Place IV. Stripe crosswalk diagonally across the north side of Connecticut Avenue V. Remove "no pedestrian crossing" signs from south side of intersection VI. Place crosswalk diagonally across the south side of Connecticut Avenue
	C. Signal coordination	Reduce PM peak period signal offset by seven seconds
	D. Confusing "No Parking" sign on Windom near Connecticut	Replace with correct sign
8)	Actuated signal means that pedestrian walk indications are not present in every signal cycle.	I. Install pedestrian signals across Yuma Street II. Operate signals in pre-timed mode. Remove pedestrian pushbuttons III. Restripe crosswalks and stop bars
9)	A. Congestion caused by car wash on southbound Connecticut between Albemarle and Yuma	**Short-term:** Under the existing car wash configuration, coordinate with the Metropolitan Police Department to provide an officer to direct traffic during peak hours of operation and ensure that local and residential traffic is not blocked by car wash activity.
		Long-term: Reverse the operation of the car wash and use the alleys behind and next to the car wash for queuing. Continue to provide an MPD officer to direct traffic during peak periods of operation
	B. Cut-through traffic in the alley between Albemarle and Yuma Streets	I. Repair damaged "one-way" sign on the south side of Yuma Street at the alley II. Install a stop sign in the alley at Yuma Street III. Repair the two damaged speed bumps in the alley
10)	A. Lack of sidewalks and disabled pedestrian access at Reno Road and Tilden Street	**Short-term:** I. Replace existing crosswalk across Reno Road and associated pedestrian signal from the south side of Reno and Tilden to the north side of Reno and Springland II. Construct ADA curb ramps on the north side of the intersection III. Remove pedestrian pushbuttons
		Long-term: Construct path on the west side of the island
	B. Striping	Restripe pavement markings at intersection of Reno Road and Tilden Street, including the left lane approach of Tilden Street to Reno Road

Not to Scale June 2003	N	Connecticut Avenue Transportation Study	**Transportation Issues and Recommendations**	**FIGURE ES-2**



LEGEND:

- Metro Station
- Terminal for bus routes listed in the accompanying box
- Bus shelter

Service Guide Key:

In = Inbound
Out = Outbound
• = Both Directions
— = Not Available
♿ = Wheelchair Lift-Equipped Service

Route	Terminals	AM Rush	PM Rush	Midday	Evening	Saturday	Sunday	♿	Remarks
L10	Mt. Pleasant / Deal Jr. HS	Out		---	---	---	---		Public School Open Only
H2	Brookland-CUA Metro / Van Ness-UDC Metro	•	•	•	•	•	•	•	
H3	Brookland-CUA Metro / Tenleytown-AU Metro	In	Out	---	---	---	---	•	
L1	Chevy Chase Circle / Potomac Park	In	Out	---	---	---	---		
L2	Chevy Chase Circle / McPherson Square Metro	•	•	•	•	•	•	•	
L4	Chevy Chase Circle / Dupont Circle Metro	—	In	•	•	---	---	•	
N8	Van Ness-UDC Metro / Wesley Heights	•	•	•	•	•	•	•	Via Tenleytown-AU Metro & Yuma Street

Not to Scale		Connecticut Avenue Transportation Study	**Public Transit**	**FIGURE 4**
June 2003				

The intersections of Connecticut Avenue with Albemarle Street, Yuma Street, Windom Place, Veazey Terrace, Van Ness Street, and Tilden Street are signalized intersections, while the intersection of Upton Street is un-signalized intersection with stop control on the minor street. Sidewalks are generally in good condition, with widths greater than six feet and curb cuts present at all crosswalk locations.

As shown in Figure 3, land usage along Connecticut Avenue varies widely based on location. From Albemarle Street to Van Ness Street is moderate density commercial area with local public facilities at the corner of Van Ness Street. The Van Ness Metro station is located on the west side of Connecticut Avenue at Van Ness Street. East of Connecticut are high-density residential areas.


Reno Road

Reno Road is a two-way minor arterial running north-south through the study area between Tilden and Albemarle Streets. Reno road is generally one lane in each direction with a center lane for left turns. From Van Ness to Tilden Street, there are two lanes in each direction (Figure 2). No parking is allowed on either side of Reno Road within the study area. The intersections of Reno Road with Tilden, Van Ness and Albemarle Streets are signalized intersections while the intersection of Reno road with Yuma Street is stop-controlled on the minor street. The posted speed limit on Reno Road is 25 mph. The west side of Reno Road has six-foot sidewalks from Albemarle Street to Upton Street while the east side has six-foot intermittent sidewalks from Yuma to Warren Streets, and from Veazey to Tilden Street. Sidewalks are generally in good condition.

Land usage along Reno Road is primarily low-density residential along the west side of Reno Road and the east side from Albemarle Street to Veazey Street. The east side of Reno Road, from Veazey to Tilden Street is foreign embassy property.

Tilden Street

Tilden Street is a two-way, two-lane minor arterial running east-west through the study area between Linnean Avenue and Reno Road. There is one lane in each direction. All-day parking is permitted on both sides of the street between Reno Road and 28th Place. Parking is not allowed on the north side of Tilden Street from Linnean Avenue to 28th Place. Tilden Street has a landscaped center median from Linnean Avenue to Sedgwick Street. The intersection of Tilden Street with Linnean Avenue is stop-controlled on the minor street, while the intersections of Tilden Street with Connecticut Avenue and Tilden Street with Reno Road are signalized. The posted speed limit is 25 mph. Both sides of the road have sidewalks, which are generally six feet in width.

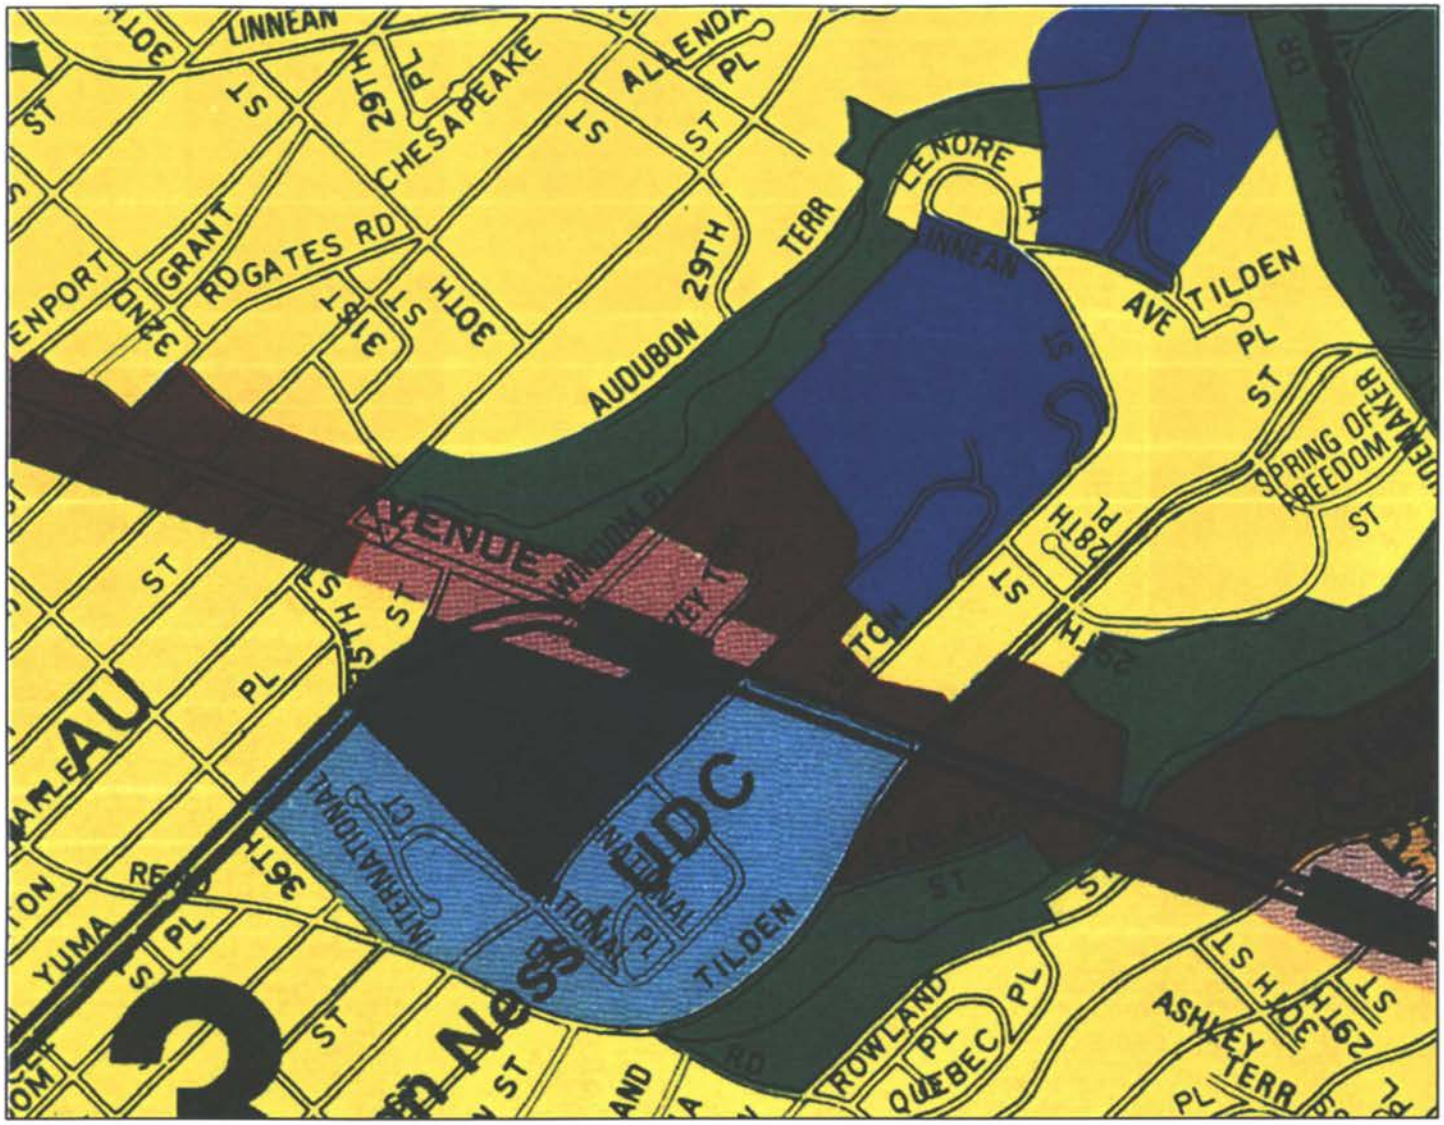

Legend:

Low density residential	Federal
Moderate density residential	Institutional
High density residential	Parks, recreation and open space
Moderate density commercial	Local public facilities

Source:
District of Columbia Office of Planning
801 North Capitol Street N.E., Suite 4000, Washington, D.C. 20002
February 2001

Not to Scale		Connecticut Avenue Transportation Study	**Generalized Land Use Map**	FIGURE 3
June 2003				

As shown on Figure 3, land usage along Tilden Street varies widely based on location. From Linnean Avenue to the east side of Connecticut Avenue is low-density residential usage, with a high-density residential area near the Connecticut Avenue intersection. The north side of Tilden Street from Connecticut Avenue to Reno Road includes several embassies and the south side includes parks or open space.

Albemarle Street

Albemarle Street is a two-way collector running east-west between Linnean Avenue and Reno Road in the study area. The posted speed limit is 25 mph. Albemarle Street generally operates with one lane in each direction with the exception of two lanes in each direction at the Connecticut Avenue intersection (Figure 2). From Linnean Avenue to 35th Street no parking is allowed on the south side of Albemarle Street. However, all day parking is allowed on the north side of Albemarle Street from 35th Street to Linnean Avenue, and both sides of the road from 35th Street to Reno Road. Signalized intersections along this portion of Albemarle Street include Connecticut Avenue and Reno Road. The intersection with Linnean Avenue is all-way stop controlled. Sidewalks are six feet wide on average and generally in good condition.

Land usage along Albemarle Street is primarily low-density residential, with high-density residential and moderate density commercial at the intersection of Albemarle Street and Connecticut Avenue.

Van Ness Street

Van Ness Street is a two-way road running east-west from Reno Road to the east of Connecticut Avenue. West of Connecticut Avenue, Van Ness Street is classified as a collector. It is a local road to the east of Connecticut Avenue. The posted speed limit is 25 mph. Van Ness Street operates with one lane in each direction from the east side of Connecticut Avenue with parking allowed on both sides of the road. To the west, from Connecticut Avenue to Reno Road, Van Ness Street operates with one lane in the westbound direction and two lanes in the eastbound direction. Metered parking is located on the north side of Van Ness Street between Connecticut Avenue and International Court. Signalized intersections along Van Ness Street are Connecticut Avenue and Reno Road. Sidewalks on both sides of the road between Reno Road and Connecticut Avenue are generally eight feet wide, while sidewalks east of Connecticut Avenue are generally six feet wide. Sidewalks are generally in good condition with curb cuts visible in all crosswalk locations.

Land usage along Van Ness Street varies widely based on location. On the east side of Connecticut Avenue, Van Ness Street is institutional with high-density residential and moderate-density commercial area near Connecticut Avenue. On the west side of Connecticut Avenue, land usage is predominantly public and federal facilities, with the UDC-Van Ness campus at the corner of Van Ness Street and Connecticut Avenue.

PUBLIC TRANSPORTATION

The Washington Metropolitan Area Transit Authority (WMATA) provides extensive bus and rail service in the study area. As shown in Figure 4, four routes (L1, L2, L4, and D32) provide north-south service to the study area, operating primarily along Connecticut Avenue. In addition, route H2 provides service from the Van Ness-UDC metro station to the south on Connecticut Avenue. Route H3 serves the west side of the study area along Veazey Street, Van Ness Street and Reno Road. Route N8 operates from the Metro station to the west along Veazey and Van Ness Streets. The Van Ness-UDC station of the Metro Red Line is located on Connecticut Avenue at Veazey Street. Access to the station is provided on both sides of Connecticut Avenue.

Bus routes operating in the study area are as follows[1]:

WMATA Route L1, L2, L4 – Connecticut Avenue Line

Routes L1, L2, L4 operate on Connecticut Avenue and are the major bus routes for traveling north-south through the study area. During weekdays, L2 provides service throughout the day with southbound service operating from 5:05 AM until 1:35 AM. Northbound service operates from 5:39 AM until 2:08 AM. Southbound L1 operates only during the morning rush hour from 6:58 AM until 8:37 AM, and southbound L4 starts its operation after the end of morning peak hour from 9:15 AM until 8:14 PM. Northbound L1 operates only during afternoon peak hours from 4:12 PM till 6:05 PM, and northbound L4 operates from 8:31 AM until 8:43 PM.

In the study area, southbound headways range from 6 minutes to 35 minutes, with AM peak period headways varying from 6 to 9 minutes, and PM peak period headways ranging from 8 to 12 minutes. Northbound headways range from 5 to 38 minutes, with AM peak period headways varying from 7 to 15 minutes, and PM peak period headways ranging from 5 to 10 minutes.

On Saturdays and Sundays only route L2 operates. It runs between morning and midnight with varying headways between 12 and 40 minutes. The most prevalent headway is 20 minutes.

WMATA Route N8 – Van Ness-Wesley Heights Loop

Route N8 operates as a loop from the Van Ness –UDC campus to Wesley Heights. The outbound route serves Veazey Street from Reno Road to Wisconsin Avenue, while the inbound route operates on Van Ness Street. The loop provides service from 5:57 AM until 12:08 AM during weekdays with headways range from 18 minutes to 50 minutes. AM and PM peak headways are constant, operating 18 minutes apart.

[1] Routes and headways based on WMATA schedules published between 12/30/01 and 9/29/02.

Route N8 also runs on Saturday from 5:50 AM until 12:22 AM and on Sunday from 6:20 AM until 11:00 PM. Headways are approximately 45 minutes to 50 minutes apart for Saturday and Sunday operation.

WMATA Routes H2, H3 – Crosstown Line

Route H2 runs on Connecticut Avenue in the study area with outbound headways during AM peak period ranging from 21 to 31 minutes, while PM peak period headways range from 24 to 33 minutes. Inbound headways range from 23 minutes to 31 minutes during the AM peak period and 27 minutes to 31 minutes during PM peak hours. Weekend service is offered on this route.

Route H3 runs on Reno Road, Veazey Street and Van Ness Street on the west side of the study area, with westbound service available only in morning peak hours, and eastbound service available in morning and afternoon peak hours. Headways during the westbound AM peak period range from 22 to 27 minutes. Eastbound headways range from 50 minutes to 54 minutes during AM peak period and 21 minutes to 31 minutes during PM peak period. Weekend service is not offered on this route.


WMATA Route D32 – Deal Junior High School Line

Route D32 operates only when District public schools are in session. It runs northbound on Connecticut Avenue twice daily at 8:03AM and 8:08AM. In the afternoon, it operates along Wisconsin Avenue outside the study area.

TRAFFIC VOLUMES

In order to evaluate existing traffic conditions throughout the study area, the Study Team collected turning movement counts at the thirteen intersections listed below during peak and off-peak periods. Additionally, the Study Team collected daily traffic counts at key locations throughout the study area. Figure 5 shows the intersections where the Study Team collected turning movement count data.

1. Reno Road and Albemarle Street
2. Reno Road and Yuma Street
3. Reno Road and Van Ness Street
4. Reno Road and Tilden Street and Springland Lane
5. Connecticut Avenue and Albemarle Street
6. Connecticut Avenue and Yuma Street
7. Connecticut Avenue and Windom Place
8. Connecticut Avenue and Veazey Terrace
9. Connecticut Avenue and Van Ness Street
10. Connecticut Avenue and Upton Street
11. Connecticut Avenue and Tilden Street
12. Linnean Avenue and Albemarle Street
13. Linnean Avenue and Tilden Street

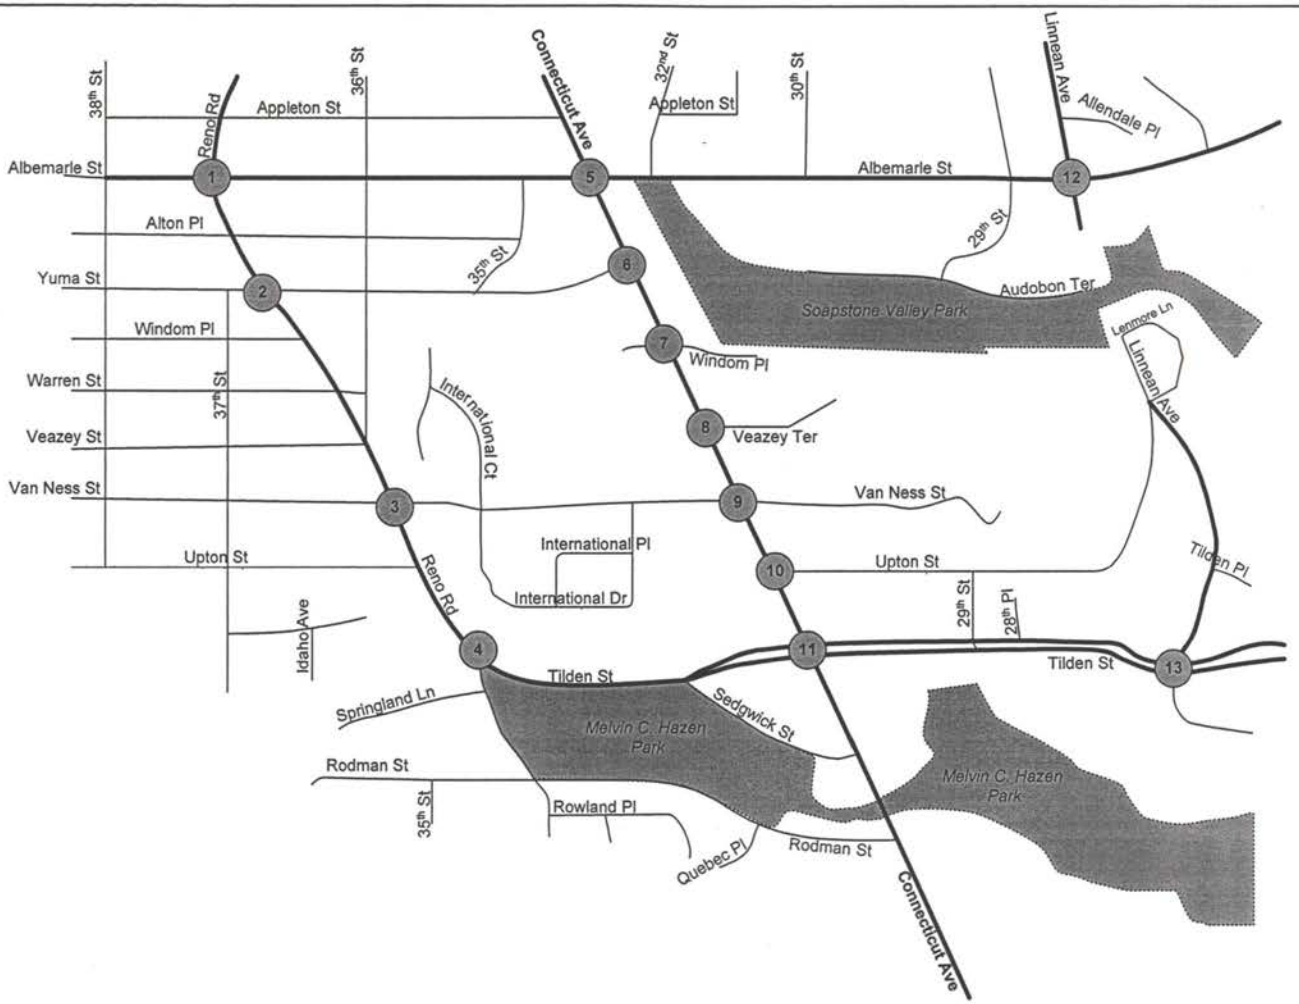

Scale: 1" = 785'		Connecticut Avenue Transportation Study	Location of Turning Movement Counts	FIGURE 5
June 2003				

The intersections on Connecticut Avenue were counted on four typical weekdays (Tuesday, Wednesday or Thursday), from 8:00 AM -10:00 AM and 4:30 PM - 8:00 PM. Additionally, these intersections were counted on four Saturdays between the times of 12:00-4:00 PM.

Counts were taken during the months of November and December 2002 and January 2003. No traffic was counted during holiday weeks or while District public schools and universities were not in session.


Since all the counts were taken during fall months, when traffic volumes are typically standard as all the schools and business are open, no seasonal adjustment factor was applied to the raw volumes.


As all the intersections in Connecticut Avenue were counted four times, the turning movement traffic counts on Connecticut Avenue were averaged and treated as raw volumes. Because of the averaging process, there were minor discrepancies in the overall balance of traffic volumes throughout the study area network. In order to improve the modeling of existing traffic conditions, the Study Team applied standard traffic engineering techniques to adjust the turning movement counts at intersections where minor unjustified imbalances were found. Figure 6 represents the existing 2002 balanced AM and PM weekday peak hour turning movement counts at all 13 intersections. Figures 7 and 8 provide information on additional traffic data collected on Connecticut Avenue. These are weekday evening (6:30- 7:30 PM) peak hour and Saturday midday peak hour turning movement counts, respectively. Accompanying pedestrian counts are presented in Figures 9, 10 and 11 for weekdays, evenings and Saturdays, respectively. Appendix B presents raw vehicular and pedestrian volumes for all counts at the above thirteen intersections.

As shown in the turning movement count figures, the intersections in the study area with the highest turning movement volumes can be found along Connecticut Avenue, with the intersection of Van Ness Street and Connecticut Avenue the highest overall. Intersections along the periphery of the study area along Reno Road and Linnean Avenue have lower traffic volumes. The pedestrian volume figures show that, as expected, high pedestrian volumes are found along Connecticut Avenue. The highest number of pedestrians for weekdays and Saturdays can be found at Windom Place and Connecticut Avenue, the intersection closest to the Metro station.

The Study Team collected automated Average Daily Traffic (ADT) counts over a two-week period throughout November 2002 at the following four locations:

- Connecticut Avenue between Albemarle Street and Yuma Street
- Connecticut Avenue between Veazey Terrace and Windom Place
- Connecticut Avenue between Tilden Street and Upton Street
- Van Ness Street west of Connecticut Avenue

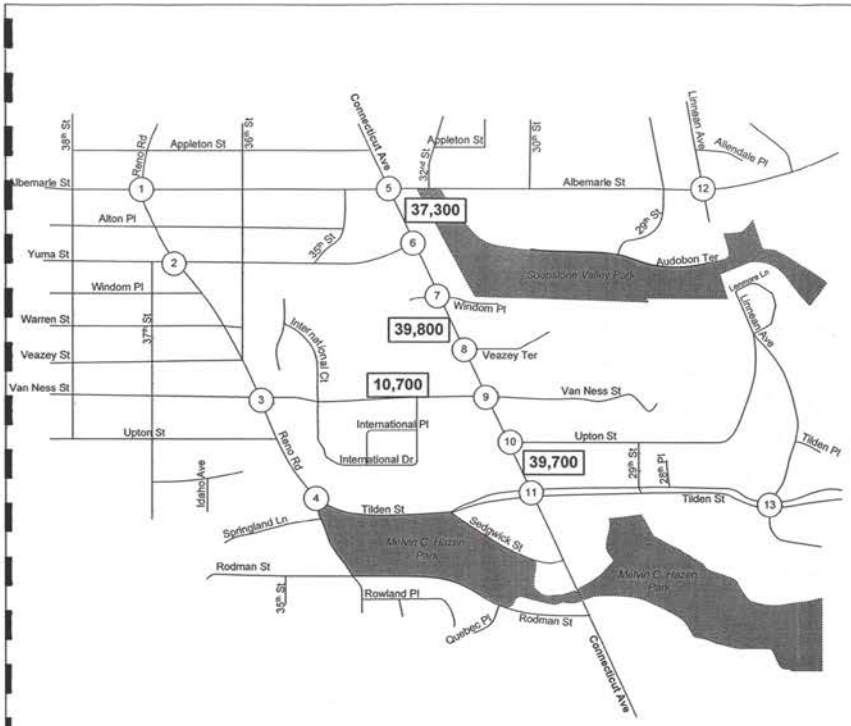


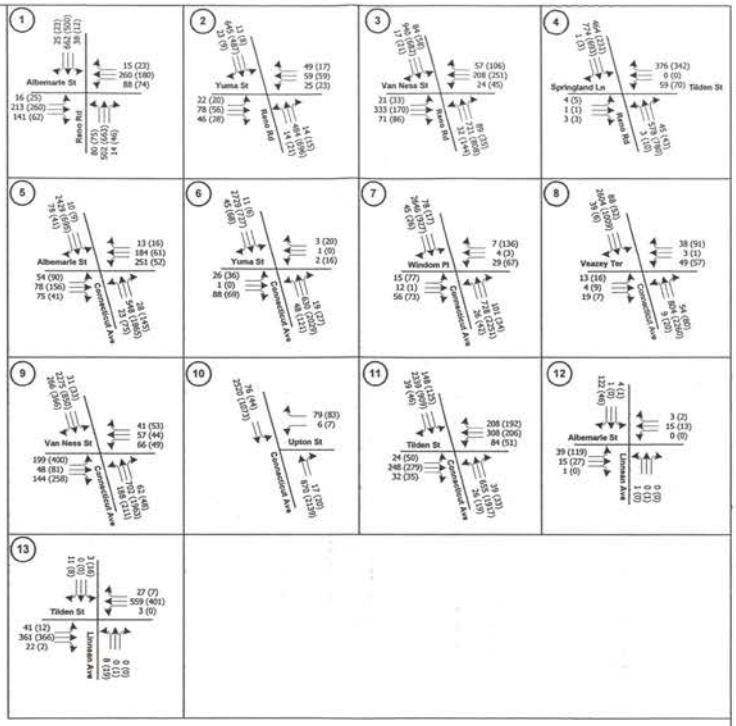


LEGEND:

385	AM Peak Hour Volume
(456)	PM Peak Hour Volume
10,000	Average Daily Volume

Scale: 1" = 785' June 2003	N	Connecticut Avenue Transportation Study	**2002 Existing Weekday Peak Hour Volumes**	**FIGURE 6**

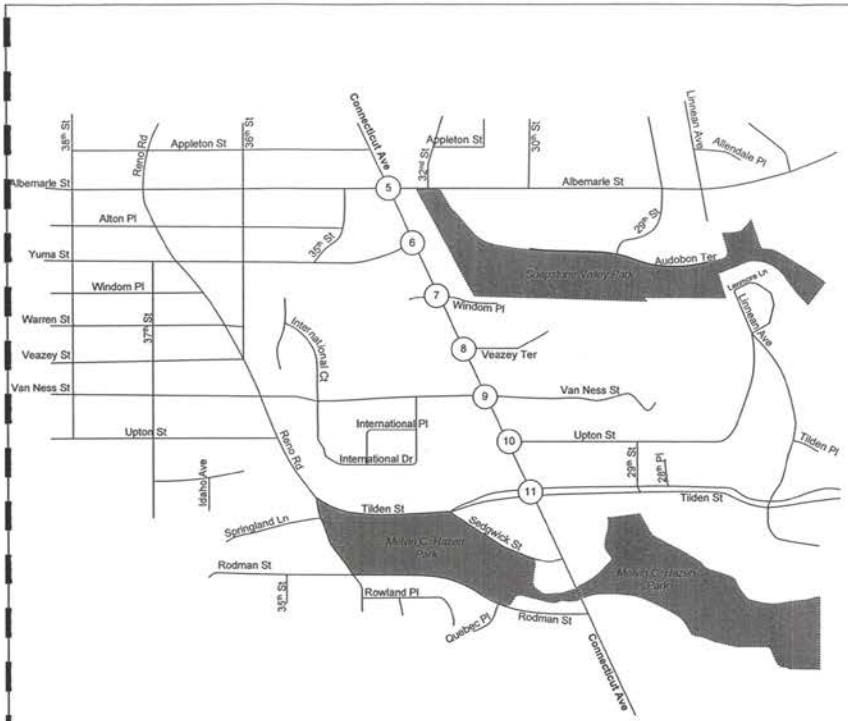


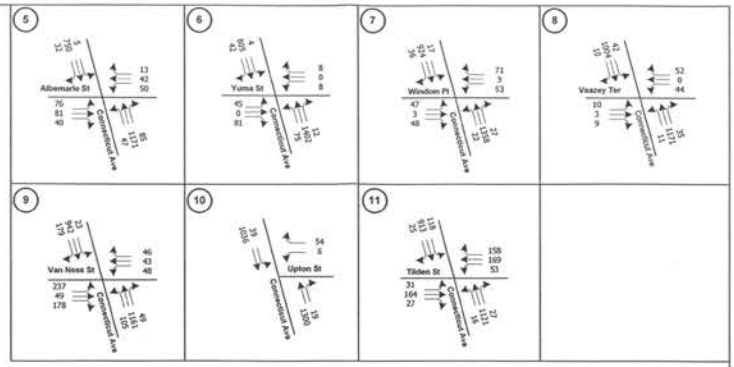


LEGEND:

385 EVENING (6:30-7:30 PM) VOLUME

Scale: 1" = 785' June 2003	N	Connecticut Avenue Transportation Study	**2002 Existing Weekday Evening (6:30-7:30 PM) Volumes on Connecticut Avenue**	**FIGURE 7**

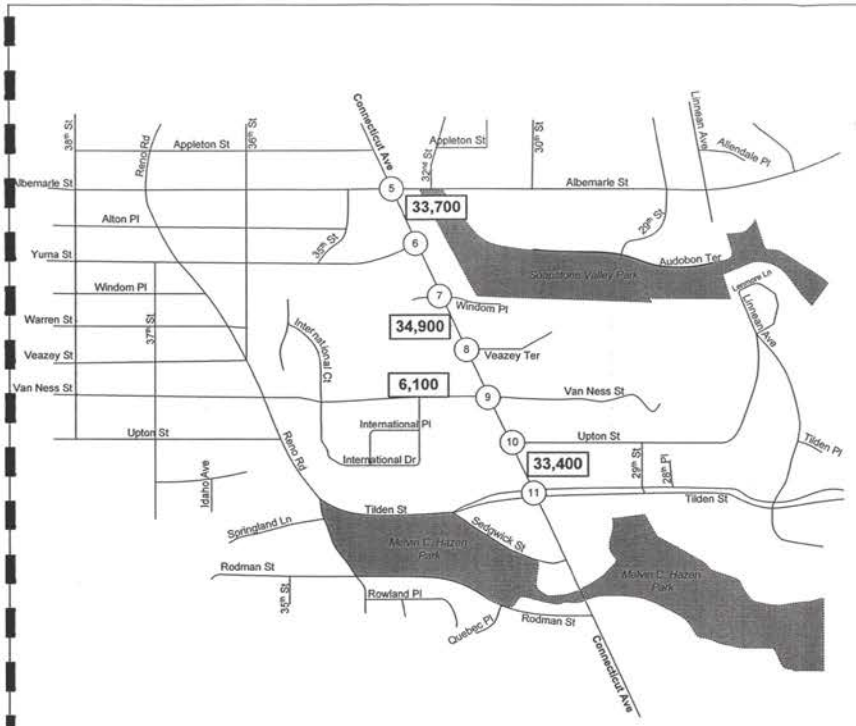


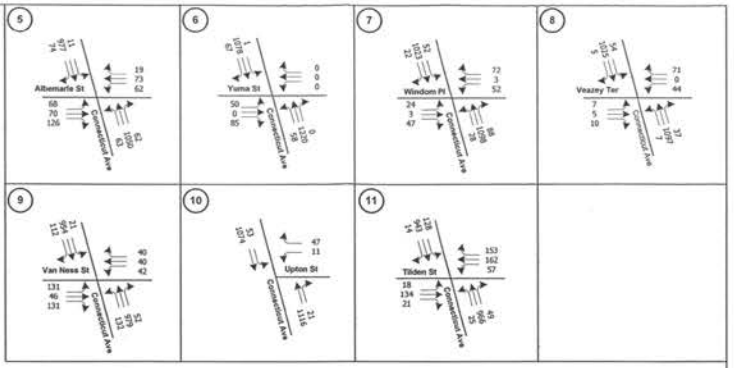

LEGEND:

385	Saturday Peak Hour Volume
10,000	Average Daily Volume (Saturday)


Scale: 1" = 785' June 2003	N	Connecticut Avenue Transportation Study	**2002 Existing Saturday Peak Hour Volumes on Connecticut Avenue**	**FIGURE 8**

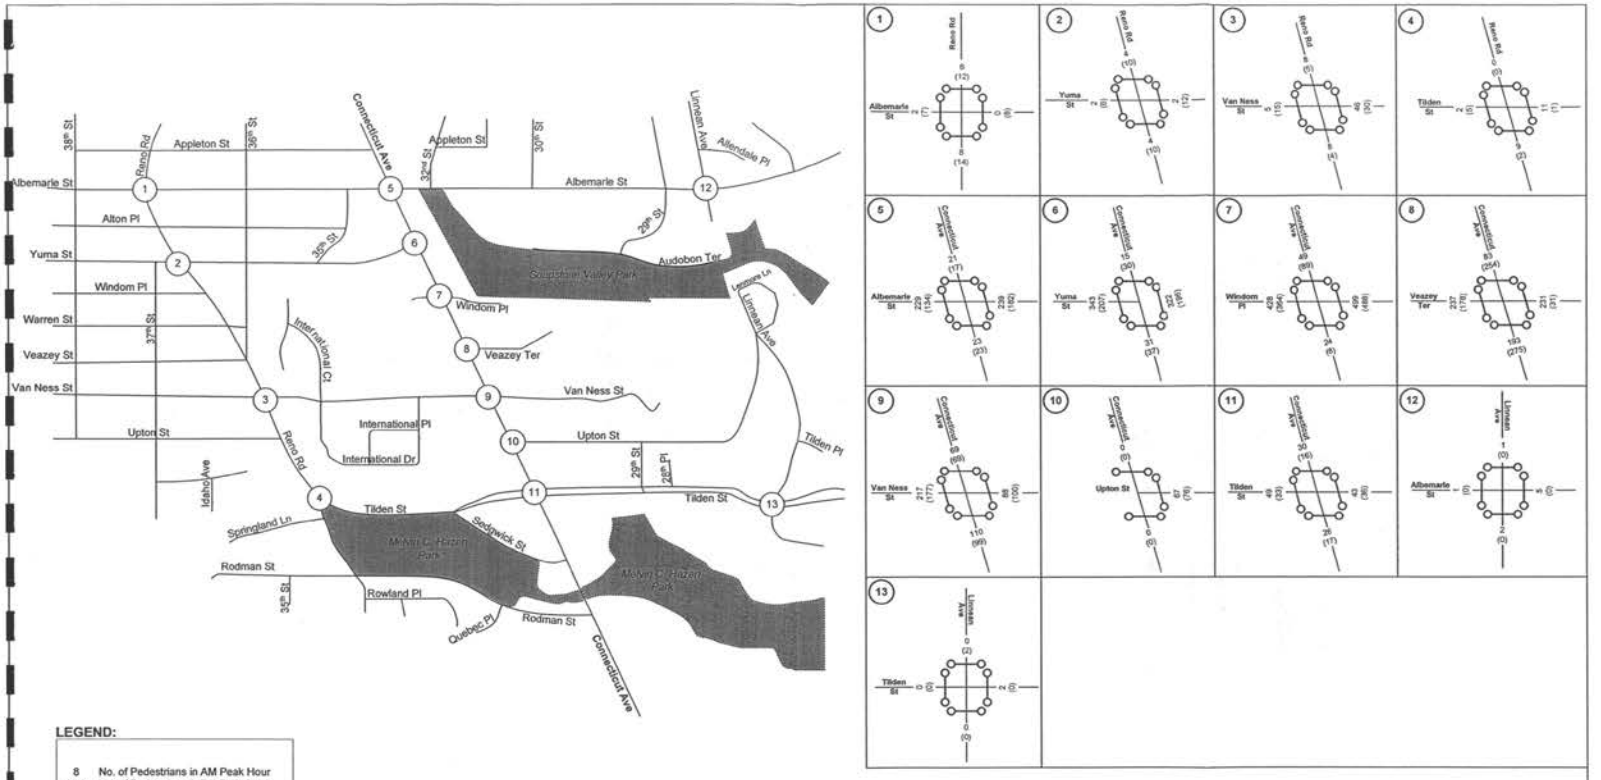


LEGEND:


8 No. of Pedestrians in AM Peak Hour
(14) No. of Pedestrians in PM Peak Hour

Scale: 1" = 785' June 2003	N	Connecticut Avenue Transportation Study	**2002 Existing Weekday Peak Hour Pedestrian Volumes**	**FIGURE 9**

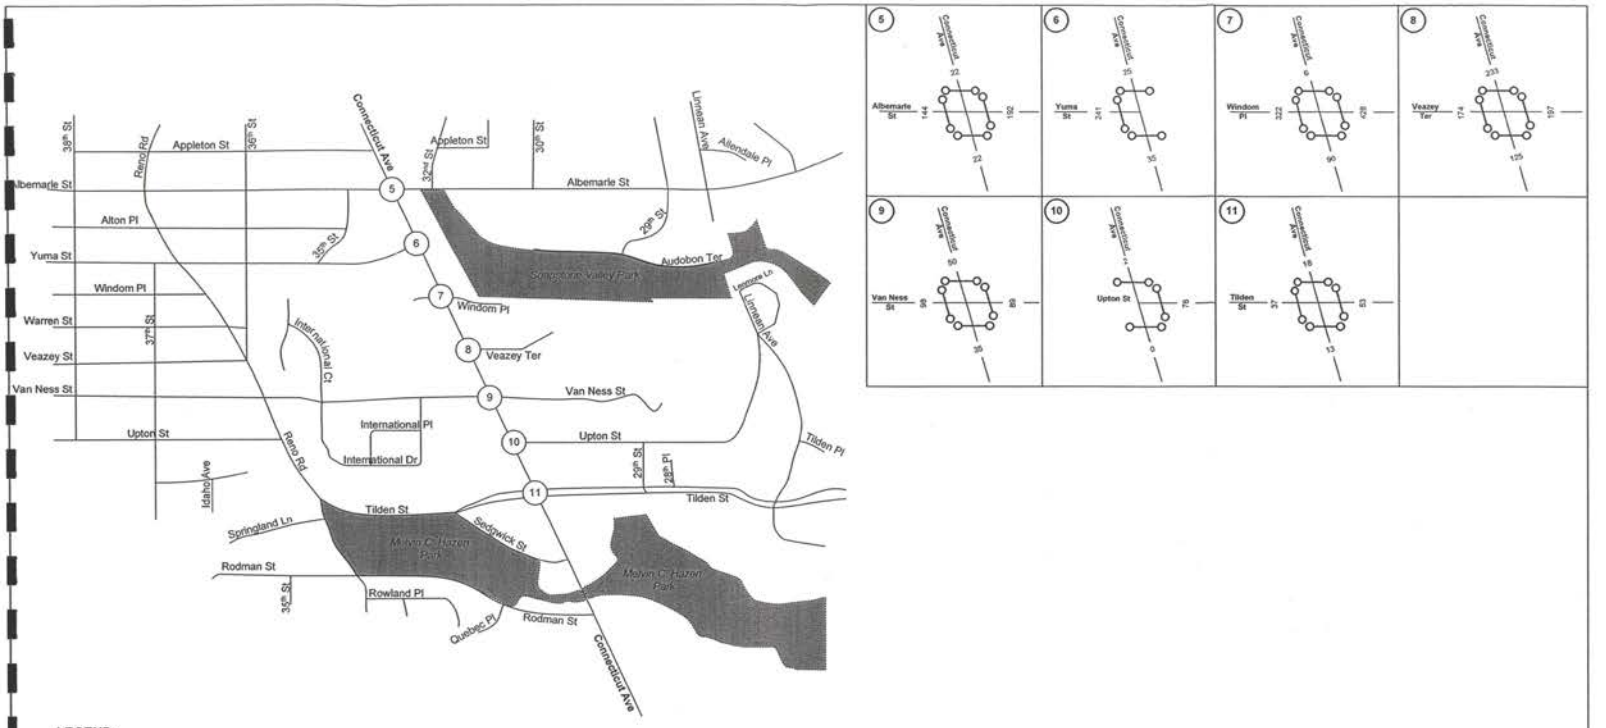

Scale: 1" = 785'		Connecticut Avenue Transportation Study	2002 Existing Weekday Evening (6:30-7:30 PM) Pedestrian Volumes on Connecticut Avenue	FIGURE 10
June 2003				

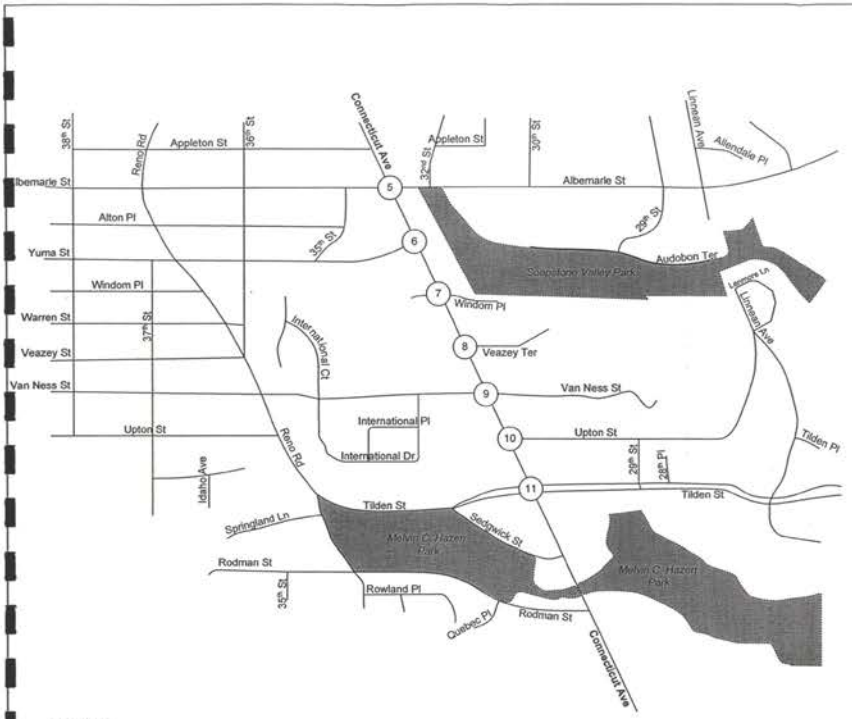

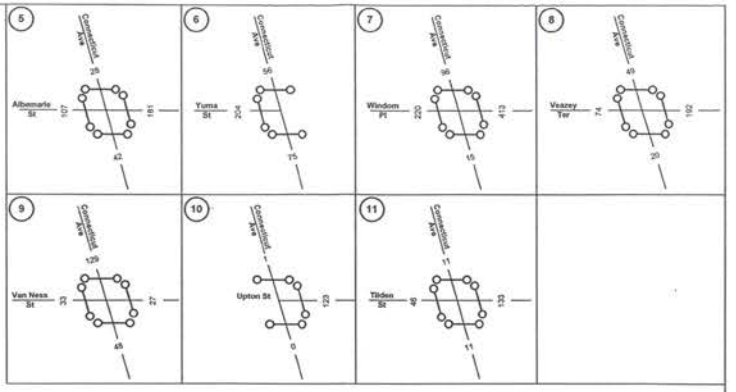

LEGEND:

42 No. of Pedestrians in Peak Hour

Scale: 1" = 785' June 2003	N	Connecticut Avenue Transportation Study	**2002 Existing Saturday Peak Hour Pedestrian Volumes on Connecticut Avenue**	**FIGURE 11**

Connecticut Avenue carries approximately 40,000 vehicles per day during a typical weekday[1] and 34,000 vehicles on Saturdays. The daily traffic on Van Ness Street on a weekday is 11,000 vehicles. Saturday daily volumes are slightly less than weekday volumes but significantly higher than Sunday daily volumes.

Charts 1 and 2 show average daily traffic volumes, for weekdays and Saturdays respectively, at one of the four locations where average daily traffic volumes were recorded. Charts for the remaining three locations are presented in Appendix B. As shown in Chart 1, traffic levels on Connecticut Avenue during the AM peak hour are higher than the traffic during the PM peak hour. During the weekday AM peak period, traffic between 8:00 AM to 9:00 AM is consistently higher than during other hours of the peak period. Weekday peak traffic conditions during the PM peak period are maintained over a period of several hours. As indicated in Chart 2, the peak period for Saturdays is between 12:00 PM and 6:00 PM with volumes relatively constant throughout this entire peak period.

Automated vehicle classification counts taken over a two-week periods on Van Ness Street west of Connecticut Avenue indicate that approximately six percent of average weekday traffic is comprised of heavy vehicles (buses, semi-trucks, etc.). Weekend percentages of heavy vehicles are in the range of three to four percent.

Between the hours of 7:00 AM and 7:00 PM, the classification data indicates that Connecticut Avenue volume is approximately two percent heavy vehicles.

SPEED AND TRAVEL TIMES

In order to gain an understanding of driving patterns and to gather information needed in the development of the traffic model for the study area, the Study Team collected information on speed and travel times on key corridors in the study area. The Study Team collected the data on travel times and delay on January 16, 2003.

Study Team data collectors drove the Connecticut Avenue, Tilden Street, Reno Road, Albemarle Street and Van Ness Street corridors several times in each direction during both the AM and PM peak hours, and recorded the elapsed travel times at predetermined travel points and the distance between the selected travel points. For the travel time runs, the data collectors were instructed to drive at the same speed as most of the vehicles traversing the study area. Thus, in some sections of the critical corridors, the data collectors traveled at speeds above the speed limit.

The Study Team calculated average speed for each roadway segment as well as an overall average speed for the corridor using the data collected on travel times and distances

[1] Total 24-hour traffic volume in both directions.

Chart 1
Weekday Hourly Distribution of Vehicular Trips -
Connecticut Avenue North of Veazey Terrace


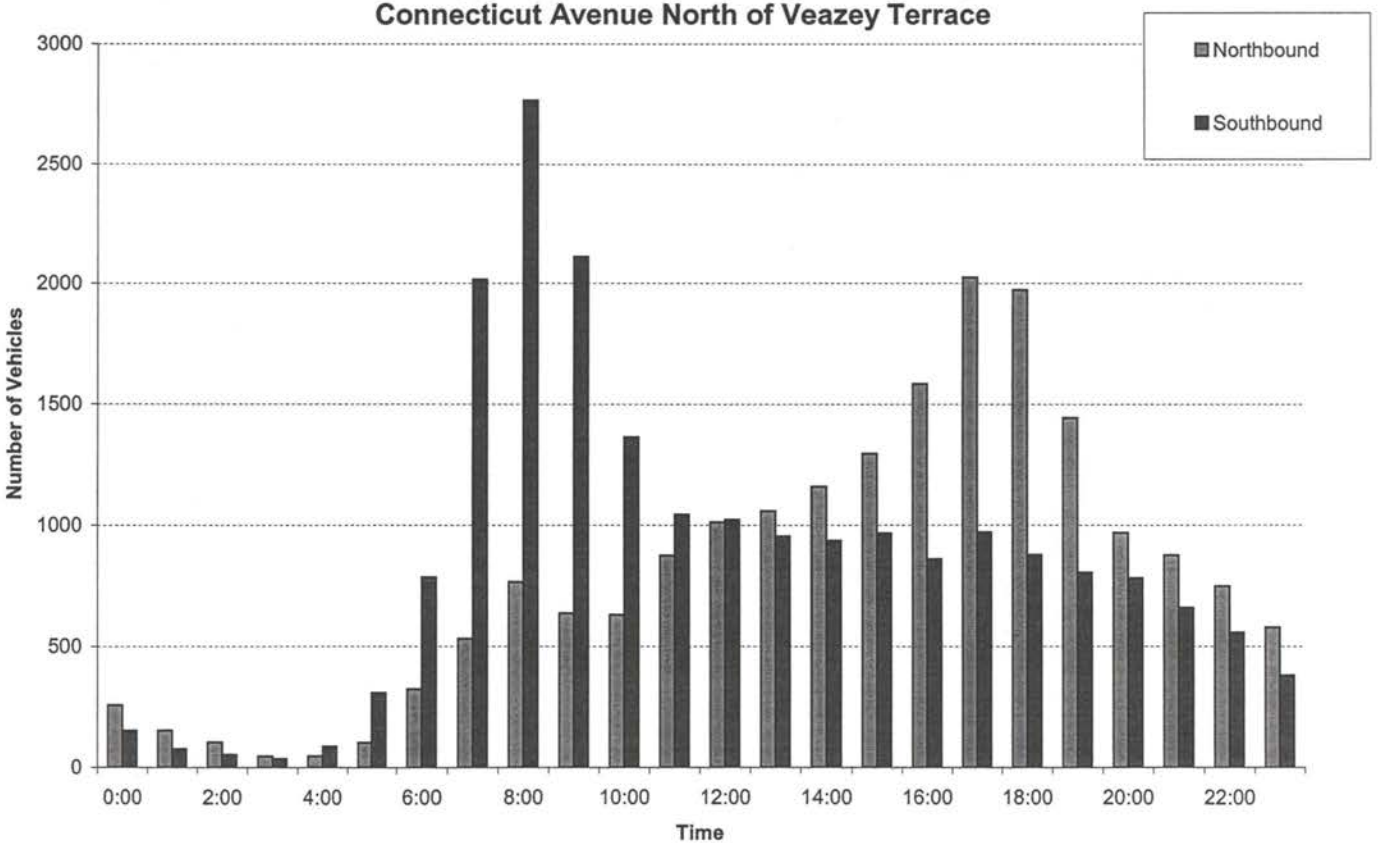


Chart 2
Saturday Hourly Distribution of Vehicular Trips - Connecticut Avenue North of Veazey Terrace

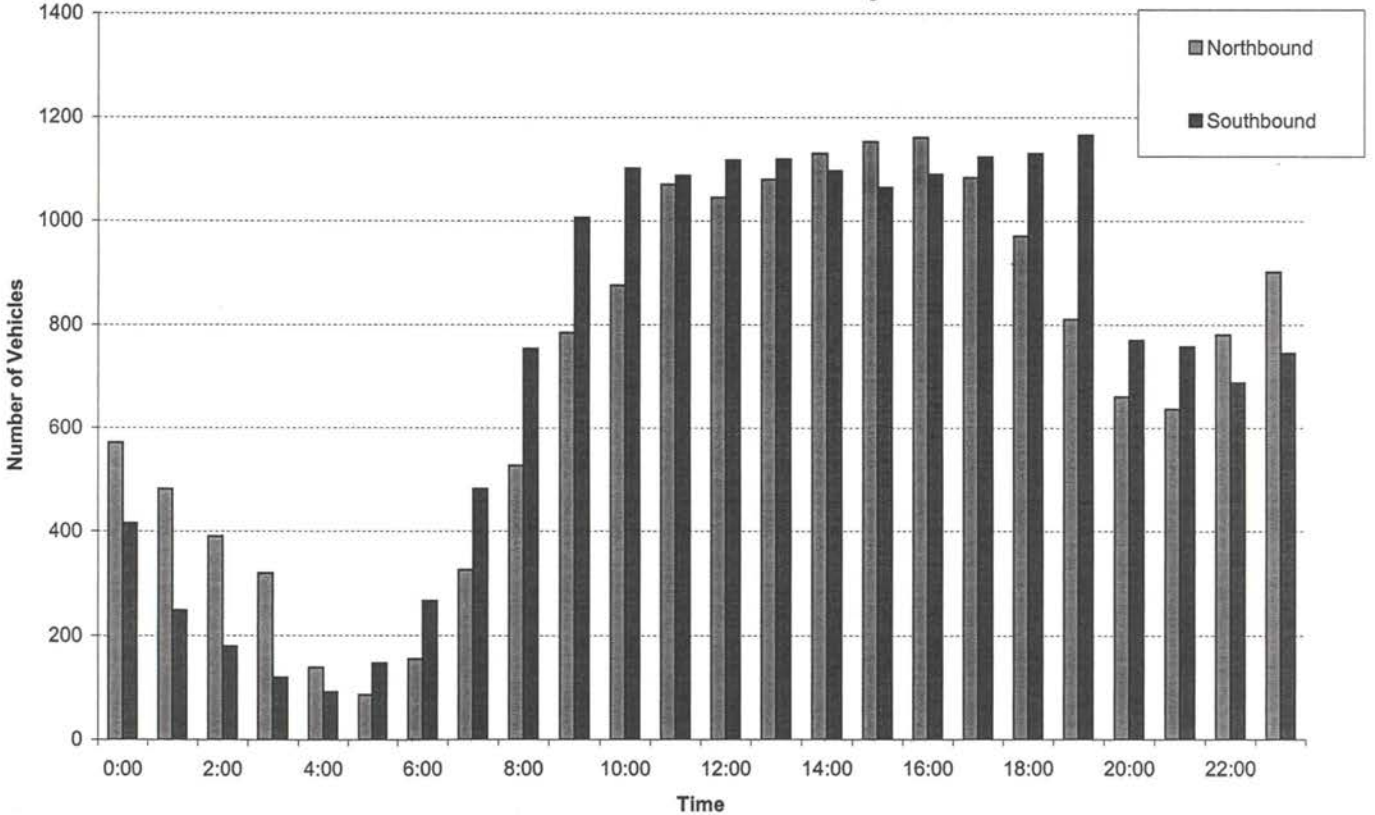


between time points. Figures 12 and 13 present overall travel times and speeds for the key corridors for AM and PM peak hours, respectively. Due to signal coordination, the Connecticut Avenue corridor (from Sedgwick street to Albemarle street) has higher southbound speeds in the morning, and higher northbound speed in the afternoon peak hour. Eastbound Tilden Street speed is consistently higher in AM and PM peak hour than the westbound direction. Speeds on Albemarle Street are generally consistent regardless of time period, with the exception of westbound Albemarle Street from 36th street to Reno Road, which has a considerably slower segment speed. However, eastbound Albemarle Street has higher average speed than westbound Albemarle Street for the AM and PM peak hour. Average speeds on northbound Reno Road are approximately twice the speed of southbound Reno Road for the AM and PM hour. Van Ness Street speeds are consistent regardless of peak hours; however, eastbound speeds are higher than westbound speeds. For individual segments, speeds in the segment of Van Ness Street between International Drive and Reno Road are noticeably slower than all other segments.

These travel times include signal delay, and therefore due to traffic signals along most of the corridors, as well as moderate to heavy peak period traffic volumes, overall average speeds are considerably slower than the speed limits of the roadways. However, there are individual sections on all of the corridors (except westbound Albemarle Street and Southbound Reno Road) where average speeds met or exceeded the speed limit, as can be seen in Table 1. In particular, traffic traveling on Connecticut Avenue northbound between Upton and Tilden Streets; eastbound Albemarle Street between Connecticut Avenue and 30th Street; Tilden Street eastbound between 29th Street and Linnean Avenue; Reno Road northbound between Yuma Street and Albemarle Street; and Van Ness Street eastbound between International Court and International Drive exceeded the speed limit by a noticeable amount.

Table 1
Average Travel Speeds Between Selected Locations

Roadway and Direction	Segment	Speed Limit (mph)	AM Peak (mph)	PM Peak (mph)
Connecticut Avenue northbound	Tilden Street – Upton Street	30	32.2	36.1
Connecticut Avenue southbound	Upton Street – Tilden Street	30	32.2	11.0
Albemarle Street eastbound	Connecticut Avenue – 30th Street	25	31.8	29.5
Albemarle Street westbound	30th Street – Connecticut Avenue	25	17.2	20.3
Tilden Street eastbound	29th Street – Linnean Avenue	25	33.5	30.2
Tilden Street westbound	Linnean Avenue – 29th Street	25	26.2	22.9
Reno Road northbound	Yuma Street – Albemarle Street	25	38.8	34.9
Reno Road southbound	Albemarle Street – Yuma Street	25	15.4	30.1
Van Ness Street eastbound	International Court – International Drive	25	38.0	37.2
Van Ness Street westbound	International Drive – International Court	25	37.2	27.1

Appendix C presents a list of recorded speeds for all analyzed segments within the Study Area.

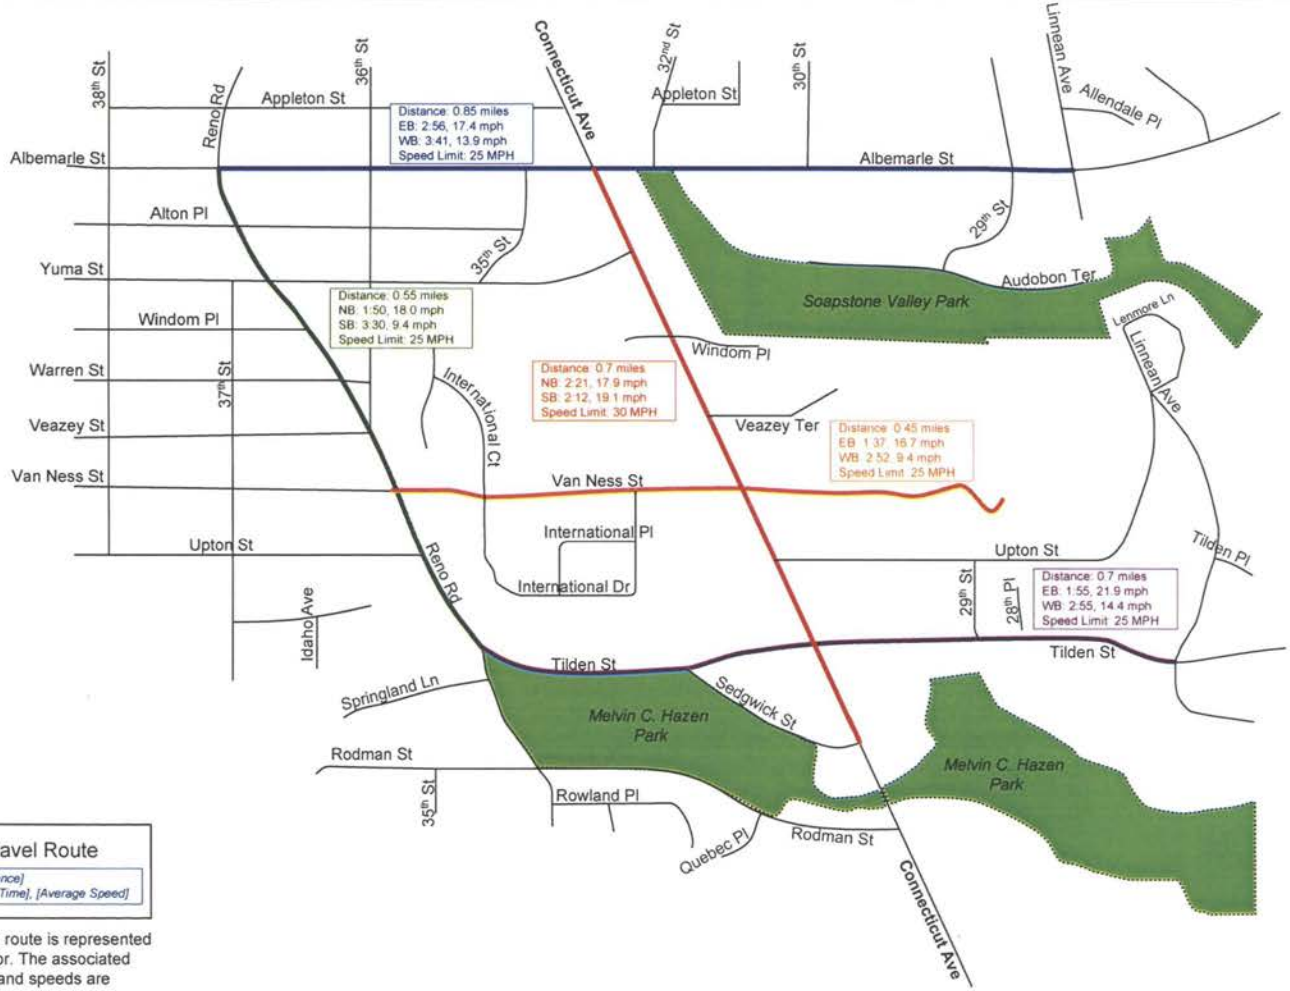


Legend:

Travel Route

Distance: *[Total Distance]*
[Direction]: [Average Time], [Average Speed]

Note: Each travel route is represented by a different color. The associated distances, times and speeds are shown with matching-colored text.

Scale: 1" = 785'		Connecticut Avenue Transportation Study	AM Peak Period Travel Times and Speeds	FIGURE 12
June 2003	N			

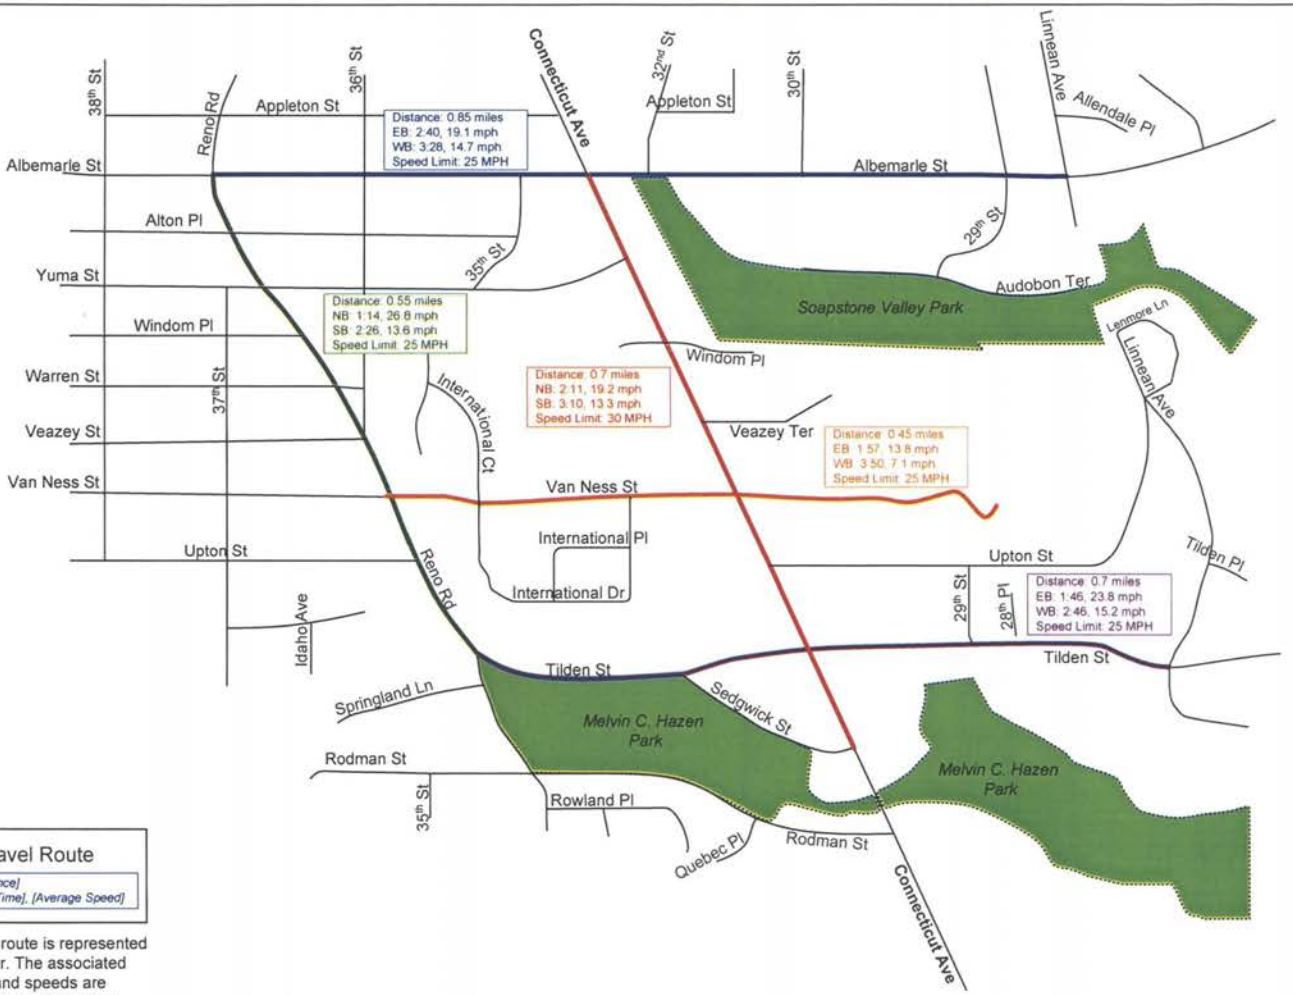

Legend:

Travel Route

Distance: *[Total Distance]*
[Direction]: [Average Time], [Average Speed]

Note: Each travel route is represented by a different color. The associated distances, times and speeds are shown with matching-colored text.

Scale: 1" = 785' June 2003	N	**Connecticut Avenue Transportation Study**	**PM Peak Period Travel Times and Speeds**	**FIGURE 13**

ORIGIN-DESTINATION PATTERNS IN THE STUDY AREA

In order to gain an understanding of existing traffic patterns in the study area, the Study Team conducted a comprehensive assessment of origins and destinations for vehicles entering and exiting the study area during the AM and PM peak period. The origin-destination survey helped identify the travel patterns of all vehicles entering the study area during the peak hours.

DATA COLLECTION FOR ORIGIN-DESTINATION SURVEY

The data collection effort for the origin-destination survey encompassed the following tasks:


1. Recording of license plates at all major entry and exit points of vehicles entering and exiting the study area: survey personnel (surveyors) recorded license plate data, state and number, onto tape recorders at the locations shown in Figure 14 on November 14, 2002.
2. Recording of missed vehicles: if a surveyor could not get the license plate of a vehicle, he/she was instructed to note the vehicle as a "missed" to have control totals that could be used for the expansion of the survey data.
3. Transcription of license plate records: surveyors entered the state and license plate data for each location onto a computerized database.

DATA PROCESSING FOR ORIGIN-DESTINATION SURVEY

Study Team staff used the license plate database to match entering and exiting vehicles. The Study Team made the following assumptions in the database matching process:

1. Based on field observations, 35 percent of unmatched volumes at entry and exit points were assumed to have entered or exited the study area via streets where license plate data was not collected.
2. Based on the high number of residential units in the study area, during the AM peak period, remaining unmatched exiting vehicles with DC license plates were assumed to originate their trips in the study area. During the PM peak period, remaining unmatched entering vehicles with DC license plates were assumed to terminate their trips in the study area.
3. Missed vehicles have the same travel patterns as vehicles for which origin origin-destination matches were found.

In the first step of the license plate matching process, the Study Team developed a "raw" origin-destination trip matrix based on existing license plates that matched entering license plates. This raw origin-destination matrix excluded unmatched vehicles and missed vehicles. In the second step, the Study Team used the assumptions listed above to determine a "total" origin-destination trip matrix for all vehicles entering and exiting the study area.

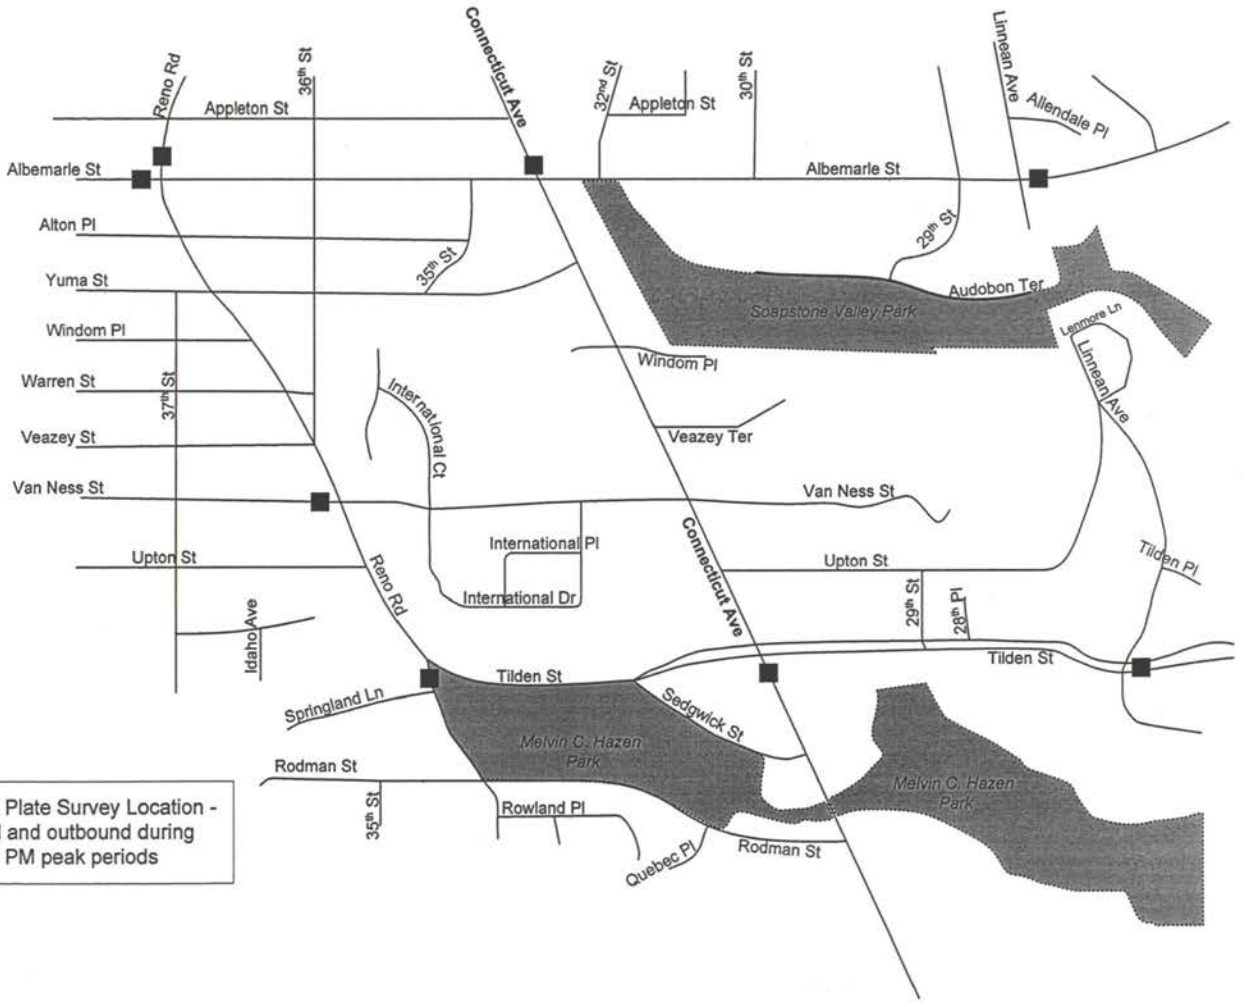

LEGEND:

■ License Plate Survey Location - inbound and outbound during AM and PM peak periods

Scale: 1" = 785'	N	Connecticut Avenue Transportation Study	**License Plate Survey Locations for Origin-Destination Study**	**FIGURE 14**
June 2003				

TRIP MATRICES AND FINDINGS OF ORIGIN-DESTINATION SURVEYS

Tables 2 and 3 present the results of the vehicle matching for the study area during the AM peak period (6:45AM – 9:15AM). The matrix of origins and destinations shown in Table 2 are the totals for all vehicles and include adjustments to account for unmatched and missed vehicles[1]. The main findings of the origin-destination survey results for the AM peak period are:

- Approximately 17 percent of the vehicles exiting the study area originate their trips within the study area.
- As shown in Figure 15, a majority of southbound vehicles entering the study area had Maryland license plates.
- Likewise, a majority of southbound vehicles exiting the study area had Maryland license plates.
- The location where Virginia vehicles represented the highest percentage of entering vehicles was eastbound Van Ness Street at Reno Road.
- 47 percent of vehicles destined for the study area enter the study area via southbound Connecticut Avenue at Albemarle Street
- The exit locations with the highest percentage of trips that started within the study area are eastbound Tilden Street at Linnean Avenue and westbound Albemarle Street at Reno road, each with 37 percent of their overall exiting traffic originating within the study area.
- The most used roadway in the study area is Connecticut Avenue.
- The majority of trips entering the study area via westbound Tilden Street at Linnean Avenue exit the study area at one of the exit locations along Reno Road; very few of these trips exit on Connecticut Avenue.
- With the exceptions of traffic entering the study area on eastbound Van Ness Street or westbound Tilden Street, a majority of vehicles tended to exit the study area on the same road on which they entered.

Tables 4 and 5 present the results of the vehicle matching for the study area during the PM peak period (3:00 PM – 5:30 PM). The matrix of origins and destinations shown in Table 4 includes the adjustments to account for unmatched and missed vehicles[1]. The main findings of the origin-destination survey results for the PM peak period are:

- Approximately 33 percent of the total number of vehicles exiting the study area originate their trips within the study area.
- Twenty percent of all trips bound for the study area entered on northbound Connecticut Avenue at Sedgwick Street, the highest percentage of any entry point. Northbound Reno Road at Tilden Street was the second-most used, with nineteen percent.
- As shown in Figure 16, more vehicles from Maryland entered the study area at northbound and southbound Connecticut Avenue than from any other individual state.

[1] The unadjusted "raw" origin-destination matrices are included in Appendix G.

Table 2

Total Origin-Destination Trips During the AM Peak Hours (6:45 AM - 9:15 AM)


		DESTINATIONS								
	LOCATION	Reno Rd Northbound at Albemarle St	Albemarle St Westbound at Reno Rd	Van Ness St Westbound at Reno Rd	Reno Rd Southbound at Tilden St	Connecticut Ave Southbound at Sedgwick St	Tilden St Eastbound at Linnean Ave	Albemarle St Eastbound at Linnean Ave	Connecticut Ave Northbound at Albemarle St	Internals
ORIGINS	Reno Rd Southbound at Albemarle St	0	0	4	250	16	21	0	7	183
	Albemarle St Eastbound at Reno Rd	11	0	8	88	28	15	6	27	147
	Van Ness St Eastbound at Reno Rd	6	4	0	118	132	72	5	50	302
	Reno Rd Northbound at Tilden St	371	47	24	0	56	16	12	32	359
	Connecticut Ave Northbound at Sedgwick St	27	44	73	33	0	33	6	474	531
	Tilden St Westbound at Linnean Ave	99	92	67	192	105	0	0	59	487
	Albemarle St Westbound at Linnean Ave	0	8	0	13	0	2	0	0	18
	Connecticut Ave Southhbound at Albemarle St	45	98	130	145	1906	104	4	0	1806
	Internals	204	169	89	368	411	158	11	222	N/A

Note: 1. The volumes shown on the table are for a two and half an hour period.
2. The trips shown on this table include adjustments to the raw matching data to account for license plates that were not adequately documented inthe data collection process and license plates that were not adequately matched in the database matching process.
3. N/A = not available

Table 3
Total Origin-Destination Trips During the AM Peak Hours (6:45 AM - 9:15 AM)
As Pecentage of Exit Volumes

		DESTINATIONS								
	LOCATION	Reno Rd Northbound at Albemarle St	Albemarle St Westbound at Reno Rd	Van Ness St Westbound at Reno Rd	Reno Rd Southbound at Tilden St	Connecticut Ave Southbound at Sedgwick St	Tilden St Eastbound at Linnean Ave	Albemarle St Eastbound at Linnean Ave	Connecticut Ave Northbound at Albemarle St	Internals
ORIGINS	Reno Rd Southbound at Albemarle St	**0%**	0%	1%	21%	1%	5%	0%	1%	5%
	Albemarle St Eastbound at Reno Rd	1%	**0%**	2%	7%	1%	4%	13%	3%	4%
	Van Ness St Eastbound at Reno Rd	1%	1%	**0%**	10%	5%	17%	11%	6%	8%
	Reno Rd Northbound at Tilden St	49%	10%	6%	**0%**	2%	4%	28%	4%	9%
	Connecticut Ave Northbound at Sedgwick St	4%	9%	19%	3%	**0%**	8%	13%	54%	14%
	Tilden St Westbound at Linnean Ave	13%	20%	17%	16%	4%	**0%**	0%	7%	13%
	Albemarle St Westbound at Linnean Ave	0%	2%	0%	1%	0%	1%	**0%**	0%	0%
	Connecticut Ave Southhbound at Albemarle St	6%	21%	33%	12%	72%	25%	10%	**0%**	47%
	Internals	27%	37%	23%	31%	15%	37%	25%	26%	N/A
	TOTAL VOLUME	**762**	**462**	**395**	**1206**	**2654**	**421**	**44**	**871**	**3834**

Note: 1. The volumes shown on the table are for a two and half an hour period.
2. N/A = not available

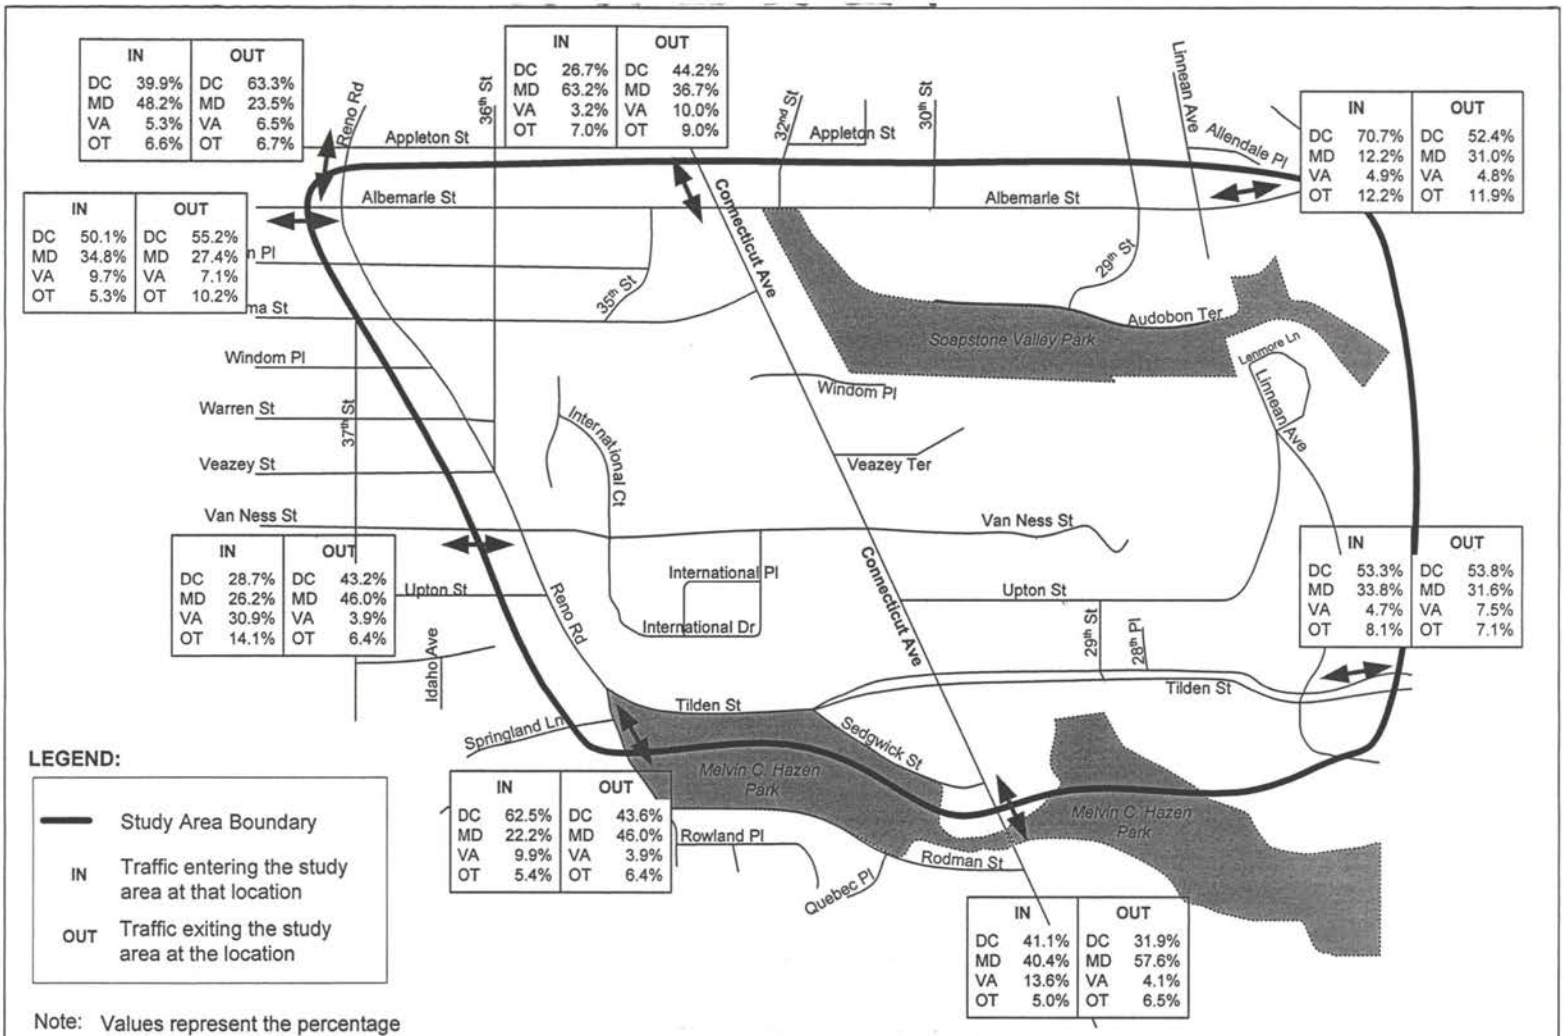

LEGEND:

———	Study Area Boundary
IN	Traffic entering the study area at that location
OUT	Traffic exiting the study area at the location

Note: Values represent the percentage of the total volume at either entry or exit direction

Scale: 1" = 785' June 2003	N	**Connecticut Avenue Transportation Study**	**AM License Plate Distribution**	**FIGURE 15**

Table 4

Total Origin-Destination Trips During the PM Peak Hours (3:00 PM - 5:30 PM)

		DESTINATIONS								
	LOCATION	Reno Rd Northbound at Albemarle St	Albemarle St Westbound at Reno Rd	Van Ness St Westbound at Reno Rd	Reno Rd Southbound at Tilden St	Connecticut Ave Southbound at Sedgwick St	Tilden St Eastbound at Linnean Ave	Albemarle St Eastbound at Linnean Ave	Connecticut Ave Northbound at Albemarle St	Internals
ORIGINS	Reno Rd Southbound at Albemarle St	**0**	6	2	218	12	43	0	6	172
	Albemarle St Eastbound at Reno Rd	9	**0**	4	53	9	38	0	43	200
	Van Ness St Eastbound at Reno Rd	15	7	**0**	43	28	46	0	52	113
	Reno Rd Northbound at Tilden St	354	69	22	**0**	18	0	0	23	305
	Connecticut Ave Northbound at Sedgwick St	44	44	26	21	**0**	52	11	908	333
	Tilden St Westbound at Linnean Ave	30	22	37	28	33	**0**	0	39	224
	Albemarle St Westbound at Linnean Ave	0	0	0	0	0	0	**0**	1	27
	Connecticut Ave Southhbound at Albemarle St	22	31	28	45	504	76	0	**0**	270
	Internals	430	201	194	536	589	310	17	1075	N/A


Note: 1. The volumes shown on the table are for a two and half an hour period.
2. The trips shown on this table include adjustments to the raw matching data to account for license plates that were not adequately documented inthe data collection process and license plates that were not adequately matched in the database matching process.
3. N/A = not available

Table 5

Total Origin-Destination Trips During the PM Peak Hours (3:00 PM - 5:30 PM)
As Pecentage of Exit Volumes

		DESTINATIONS								
	LOCATION	Reno Rd Northbound at Albemarle St	Albemarle St Westbound at Reno Rd	Van Ness St Westbound at Reno Rd	Reno Rd Southbound at Tilden St	Connecticut Ave Southbound at Sedgwick St	Tilden St Eastbound at Linnean Ave	Albemarle St Eastbound at Linnean Ave	Connecticut Ave Northbound at Albemarle St	Internals
ORIGINS	Reno Rd Southbound at Albemarle St	**0%**	2%	1%	23%	1%	8%	0%	0%	10%
	Albemarle St Eastbound at Reno Rd	1%	**0%**	1%	6%	1%	7%	0%	2%	12%
	Van Ness St Eastbound at Reno Rd	2%	2%	**0%**	5%	2%	8%	0%	2%	7%
	Reno Rd Northbound at Tilden St	39%	18%	7%	**0%**	2%	0%	0%	1%	19%
	Connecticut Ave Northbound at Sedgwick St	5%	12%	8%	2%	**0%**	9%	40%	42%	20%
	Tilden St Westbound at Linnean Ave	3%	6%	12%	3%	3%	**0%**	0%	2%	14%
	Albemarle St Westbound at Linnean Ave	0%	0%	0%	0%	0%	0%	**0%**	0%	2%
	Connecticut Ave Southhbound at Albemarle St	2%	8%	9%	5%	42%	13%	0%	**0%**	16%
	Internals	48%	53%	62%	57%	49%	55%	60%	50%	**N/A**
	TOTAL VOLUME	**903**	**380**	**313**	**944**	**1193**	**564**	**28**	**2146**	**1645**

Note: 1. The volumes shown on the table are for a two and half an hour period.
2. N/A = not available

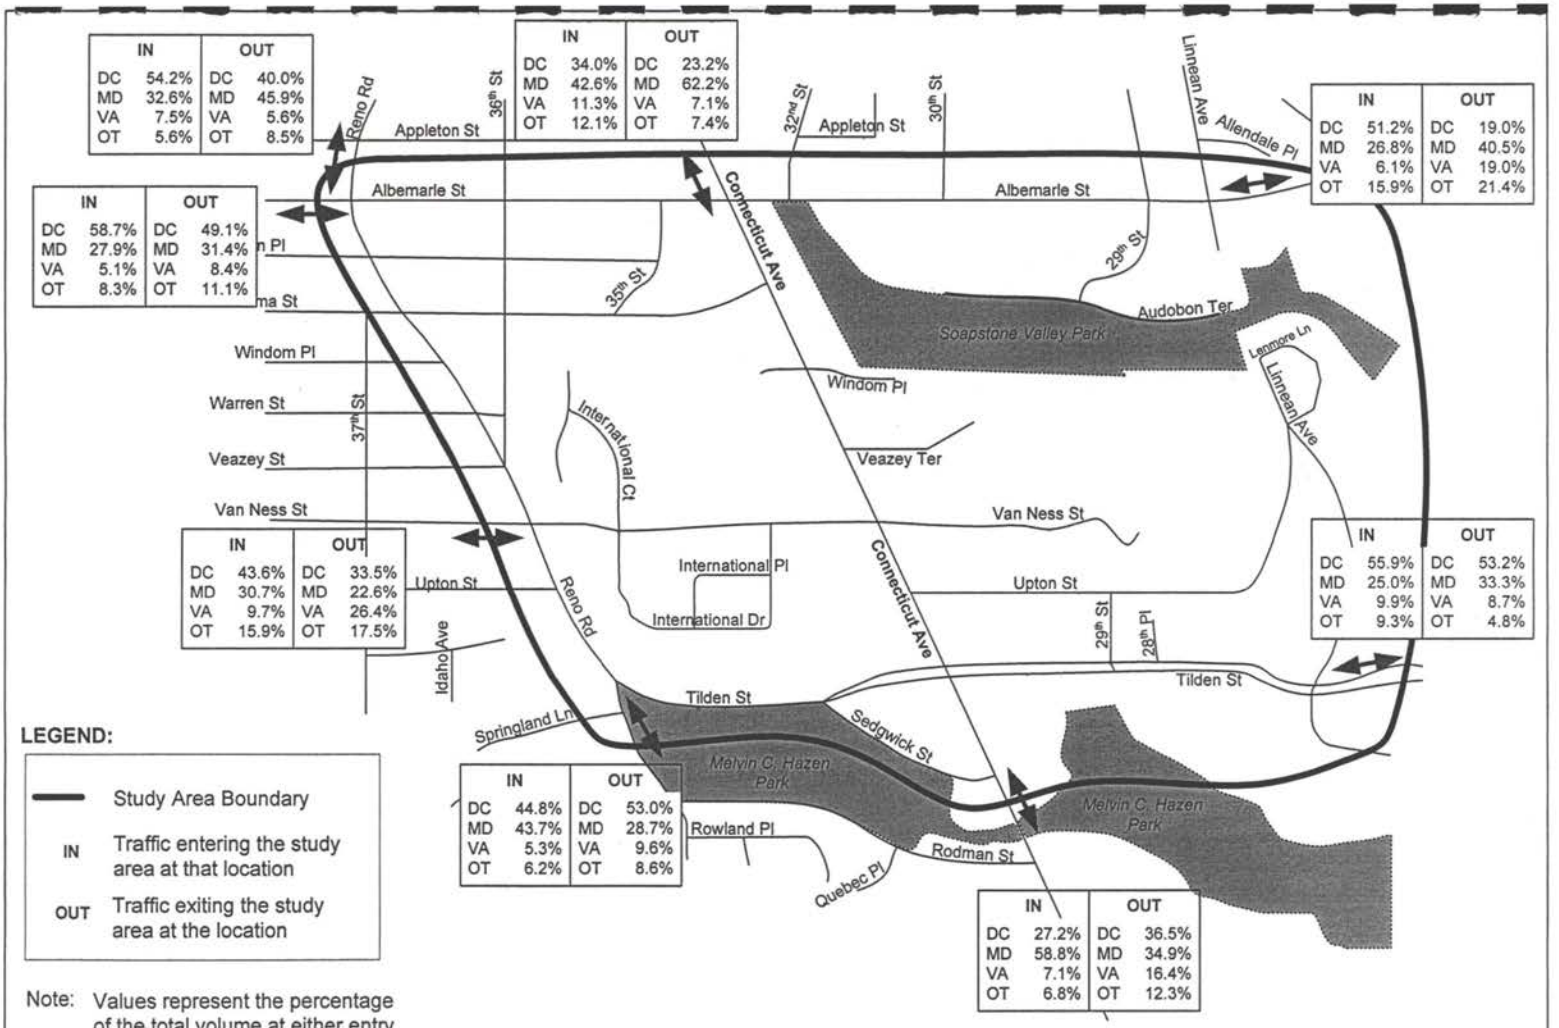

Scale: 1" = 785'		Connecticut Avenue Transportation Study	PM License Plate Distribution	FIGURE 16
June 2003				

- Likewise, Maryland vehicles represented a majority of northbound traffic exiting the study area.
- All other entry and exit points had a higher percentage of DC vehicles than any other state.
- More than one half of the exiting traffic at each individual location originated within the study area.
- The most used roadway in the study area is Connecticut Avenue.
- Forty-two percent of all vehicles exiting the study area on northbound Connecticut Avenue entered the study area on Connecticut Avenue. Additionally, 42 percent of vehicles exiting the study area on southbound Connecticut Avenue entered the study area on Connecticut Avenue.
- Thirteen percent of traffic exiting the study area on eastbound Tilden Street at Linnean Avenue entered the study area on southbound Connecticut Avenue. This is unexpected compared to the AM pattern, where a relatively small percentage of traffic exiting on Tilden Street entered on Connecticut Avenue.

SAFETY

In order to assess safety conditions in the study area, the Study Team obtained accident data from DDOT for all principal and minor arterials, collectors and local roads inside the study area, for the years from 1999 through 2001. Based on the information summarized in Table 6, there was a total of 165 reported accidents in the study area involving 69 injuries. More than 90% of the reported accidents and injuries occurred on Connecticut Avenue. There were three head on collisions in the study area, all of which occurred on Connecticut Avenue. The high number of accidents on Connecticut Avenue can be attributed in part to the reversible lane operation, high volume of traffic and the relatively high speed at which vehicles travel on this roadway.

As the information in Table 6 indicates, the intersection of Connecticut Avenue and Tilden Street experienced the highest number of accidents in the study area, with 30 during the three analyzed years. Rear end, left-turn and side-swiped were the most common types of accident at this intersection. A head-on collision was reported on this intersection. The high number of accidents at this intersection indicates that enhancements to signing and signalization at this location may be needed to improve the safety of traffic operations.

Twenty-four accidents were reported at the intersection of Connecticut and Yuma, with 10 sideswiped and seven rear end accidents. Twenty-two accidents were reported at Connecticut and Van Ness, with sideswipes as the most common type. Twenty-one accidents were reported at both Connecticut and Windom Place and Connecticut and Upton Street. Sideswipe was the most common type of accident at Windom Place whereas left-turn was the most common at Upton Street. One head-on collision was also reported at Windom Place. Numbers of accidents on the remainder of Connecticut Avenue include Albemarle Street with 16 accidents, Sedgwick Street with 12 accidents, and Veazey Terrace with six accidents. As

Table 6
Summary of Accident Data

Intersection	Total Number of Accidents (Injuries)			AM Peak Hour Percentage			PM Peak Hour Percentage			Off-Peak Percentage			Accident Type(s) (1999-2001)
	1999	2000	2001	1999	2000	2001	1999	2000	2001	1999	2000	2001	
Connecticut Avenue and Ablemarle Street	3 (1)	6 (0)	7 (4)	33	0	0	33	17	14	33	83	86	Head On - 1 Left Turn - 1 Other - 3 Parked - 2 Pedestrian - 1 Rear End - 6 Side Swiped - 2
Connecticut Avenue and Yuma Street	6 (4)	11 (5)	7 (3)	17	18	29	33	36	57	50	46	14	Left Turn - 4 Rear End - 7 Right Angle - 2 Side Swiped - 10
Connecticut Avenue and Windom Place	5 (3)	9 (2)	7 (3)	20	33	43	20	11	29	60	56	28	Fixed Object - 1 Left Turn - 1 Non-Collision - 1 Other - 4 Pedestrian - 2 Rear End - 5 Side Swiped - 7
Connecticut Avenue and Veazey Terrace	3 (1)	N/A	3 (2)	0	N/A	0	33	N/A	0	67	N/A	100	Fixed Object - 1 Other - 2 Rear End - 2 Side Swiped - 1
Connecticut Avenue and Van Ness Street	2 (1)	9 (5)	11 (5)	50	22	18	0	33	9	50	45	73	Left Turn - 2 Other - 3 Parked - 2 Pedestrian - 1 Rear End - 2 Right Angle - 3 Side Swiped - 9
Connecticut Avenue and Upton Street	8 (3)	7 (2)	6 (2)	12	0	33	38	29	17	50	71	50	Fixed Object - 2 Head On - 1 Left Turn - 6 Other - 2 Parked - 4 Right Angle - 5 Side Swiped - 3
Connecticut Avenue and Tilden Street	7 (7)	11 (5)	12 (3)	29	18	17	0	0	58	71	82	25	Fixed Object - 1 Head On - 1 Left Turn - 8 Other - 1 Parked - 2 Rear End - 9 Right Angle - 3 Side Swiped - 5
Connecticut Avenue and Sedgwick Street	4 (0)	2 (2)	6 (4)	25	0	0	25	50	33	50	50	67	Fixed Object - 1 Left Turn - 2 Other - 1 Parked - 2 Rear End - 3 Right Angle - 1 Side Swiped - 2
Reno Road and Albemarle Street	1 (0)	N/A	1 (0)	0	N/A	0	0	N/A	0	100	N/A	100	Right Angle - 2
Reno Road and Yuma Street	N/A	1 (1)	N/A	N/A	0	N/A	N/A	0	N/A	N/A	100	N/A	Right Angle - 1
Reno Road and Van Ness Street	N/A	N/A	3 (0)	N/A	N/A	0	N/A	N/A	0	N/A	N/A	100	Left Turn - 1 Rear End - 1 Right Angle - 1
Reno Road and Tilden Street	2 (0)	1 (1)	1 (0)	0	0	0	0	100	100	100	0	0	Fixed Object - 2 Side Swiped - 2
Linnean Avenue and Albemarle Street	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
Linnean Avenue and Tilden Street	1 (0)	N/A	2 (0)	0	N/A	0	0	N/A	0	100	N/A	100	Fixed Object - 2 Rear End - 1

N/A: Not Available
Complete DCDPW Accident Summary Reports can be found in Appendix D

the table indicates a large proportion of the accidents on Connecticut Avenue intersections occurred during AM and PM peak periods. During these hours, the reversible lane operations are in effect at these locations. The high number of side-swiped accidents during the peak hours may be attributable to the reversible lane operation of Connecticut Avenue. Fewer than four accidents were reported at any intersection on Reno Road and Linnean Avenue for the years 1999 to 2001.


Pedestrian accidents occurred at the intersections of Connecticut Avenue and Albemarle Street, Connecticut Avenue and Windom Place and Connecticut Avenue and Van Ness Street. Based on pedestrian observation and counts, a relatively high number of pedestrian use these intersections. While no pedestrian accidents were reported at the other critical intersections in the study area, pedestrian safety issues were observed at some intersections. These issues are described in the next section of this report. Detailed accident data is presented in Appendix D.

QUEUES AT CRITICAL INTERSECTIONS

The Study Team collected information on existing queues – the number of vehicles lined up at an intersection during the red phase of a traffic signal – at critical intersections in the study area. This information was needed to adequately develop a computerized simulation model of existing traffic conditions. The Study Team observed AM and PM peak hour queues for each of the approaches of all the critical intersections inside the study area. The Study Team calculated the maximum queues for all of the approaches. Figure 17 summarizes the observed maximum queues for all the critical intersections. Based on the observation, southbound Connecticut Avenue generally forms longer queues than northbound Connecticut Avenue during the AM peak hour. Also AM period queues are higher than the PM peak period queues on Connecticut Avenue due to more highly concentrated AM peak period traffic. The longest queues were observed on southbound Reno Road at Van Ness Street during AM peak hour.

Westbound Van Ness Street at Reno Road had the longest observed queues during the PM peak hour. The study team observed significantly long queues at Northbound Reno Road at Tilden Street during AM peak hour. Another location with long queues is westbound Tilden Street at Connecticut Avenue.

The Study Team used the queuing information to develop the existing conditions traffic model. The queues of the traffic simulations were compared with the observed queues. Where the Study Team found significant discrepancies between modeled conditions and observed conditions, the input data used to set up the model was thoroughly examined to eliminate the possibility of errors in the development of the model. After errors were ruled out, discrepancies were reconciled by making adjustments to the traffic model parameters to make the model replicate more accurately observed traffic conditions.

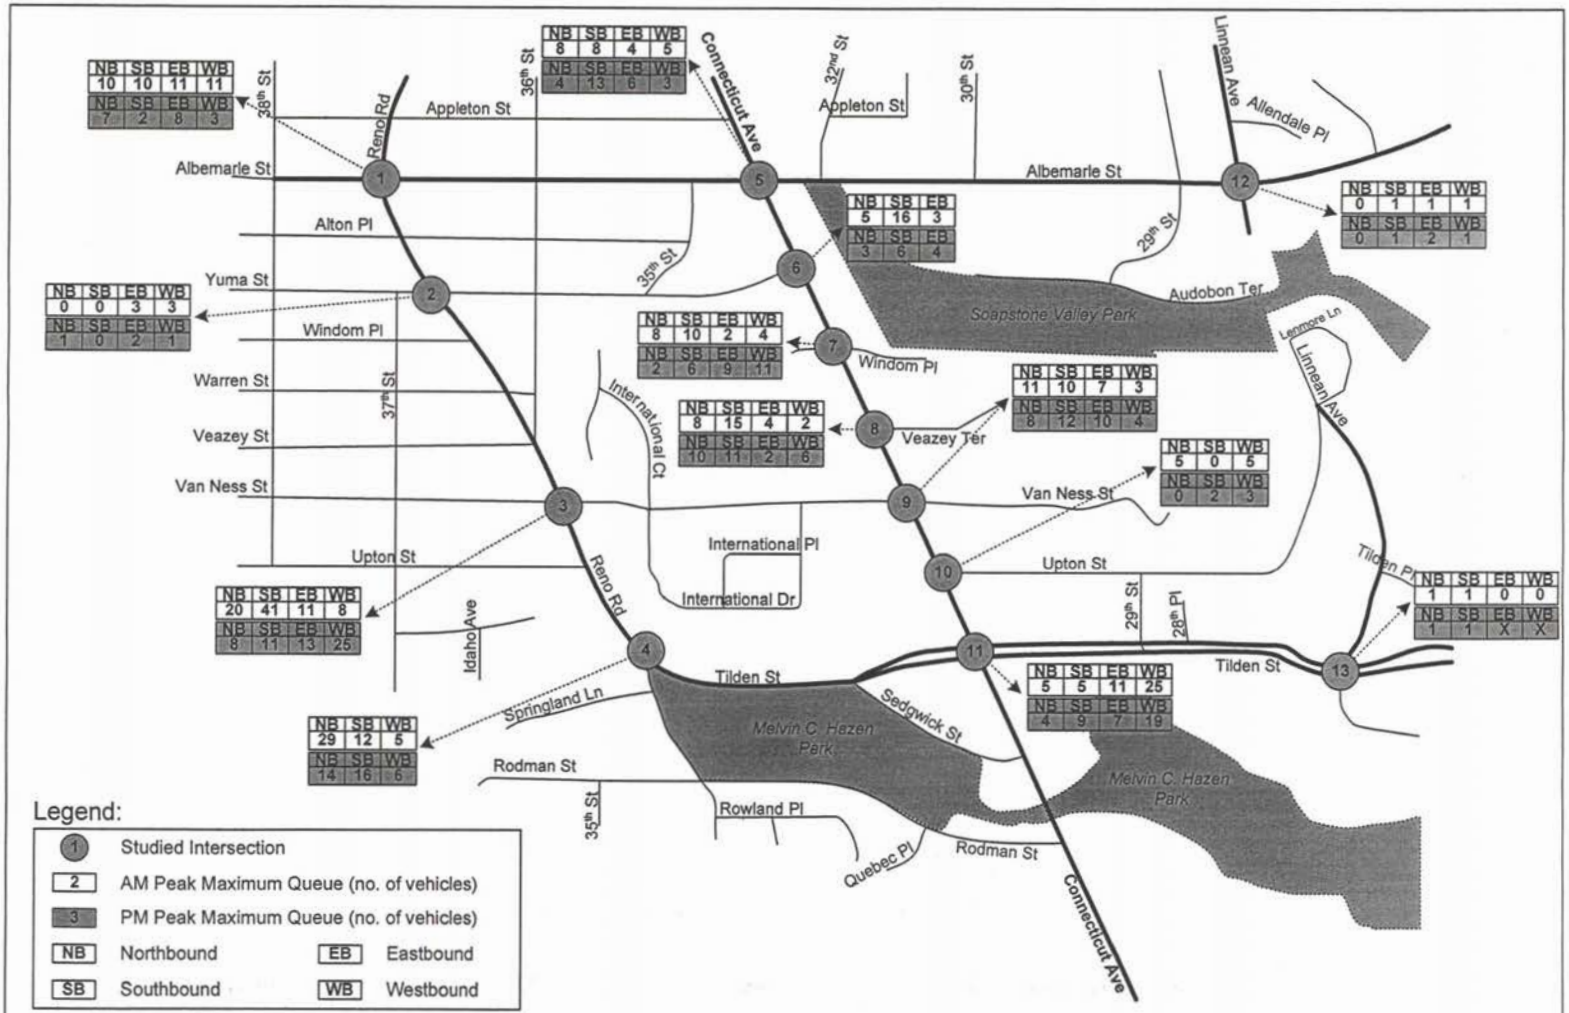

Scale: 1" = 785'		Connecticut Avenue Transportation Study	**Observed Queues at Studied Intersections**
June 2003			**FIGURE 17**

PARKING INVENTORY


The study team performed a detailed parking inventory for the entire study area. As shown in Figure 18, parking restrictions vary along the corridors based on surrounding land. For example, no parking is allowed at metered parking locations on Connecticut Avenue between 7:00 AM and 9:30 AM and from 4:00 PM until 6:30 PM. These hours coincide with reversible lane operation on Connecticut Avenue. No parking is allowed on Reno Road throughout the study area. Non-metered parking locations throughout the study area are signed as three-hour residential parking from 7:00 AM – 8:30 PM, Zone 3 excepted.

The study team recorded parking utilization on all study area roadways for four different time periods on a typical weekday during January 2003. The four periods are AM peak period from 8:30 AM-9:30 AM, AM off peak period from 10:00 AM-12 noon, PM off peak period from 2:00 PM–3:30 PM, and PM peak period from 4:00PM-5:30 PM. As metered parking on Connecticut Avenue is not allowed during AM and PM peak periods, no parking utilization inventory was performed on Connecticut Avenue during peak periods. Detailed information of parking utilization on different periods for the study area is available on Appendix E.

There are 50 parking meters on southbound Connecticut Avenue from Albemarle Street to Tilden Street, and 17 parking meters on northbound Connecticut Avenue from Van Ness Street to Albemarle Street. There are no parking meters on northbound Connecticut Avenue from Sedgwick Street to Van Ness Street; however, parking is available during off peak hours. In addition to Connecticut Avenue, metered parking is found on Van Ness Street from Connecticut Avenue to International Drive, 36th Street from Reno Road to Yuma Street, Yuma Street from 35th Street to Connecticut Avenue, and Windom Place in the vicinity of Connecticut Avenue. Parking is limited to two hours at these meters.

Parking utilization is very high on southbound Connecticut Avenue from Albemarle Street to Sedgwick Street during AM and PM off peak periods except for the ten parking meters from Upton Street to Tilden Street where the utilization rate is very low. Parking utilization on northbound Connecticut Avenue from Sedgwick Street to Albemarle Street is moderate to very high during AM and PM off peak hours. In addition to on-street parking, there are privately owned, off-street parking facilities on Connecticut Avenue between Albemarle Street and Van Ness Street.

Parking utilization was very high during the survey periods on westbound Albemarle Street from 30th Street to 36th Street and eastbound Albemarle Street from 36th Street to 35th Street. However, parking utilization is low on Albemarle Street east of 30th Street and west of 36th Street. All the metered parking on Yuma Street was at or near capacity during the survey periods due to its proximity to Connecticut Avenue. Eastbound Yuma Street parking between 35th Street and the beginning of metered parking is at full capacity throughout the day, however, parking utilization is moderate to very low west of 35th Street. Parking utilization is very low to moderate on 36th Street during the entire survey period. In addition, most of the parking meters on northbound 36th Street were not used

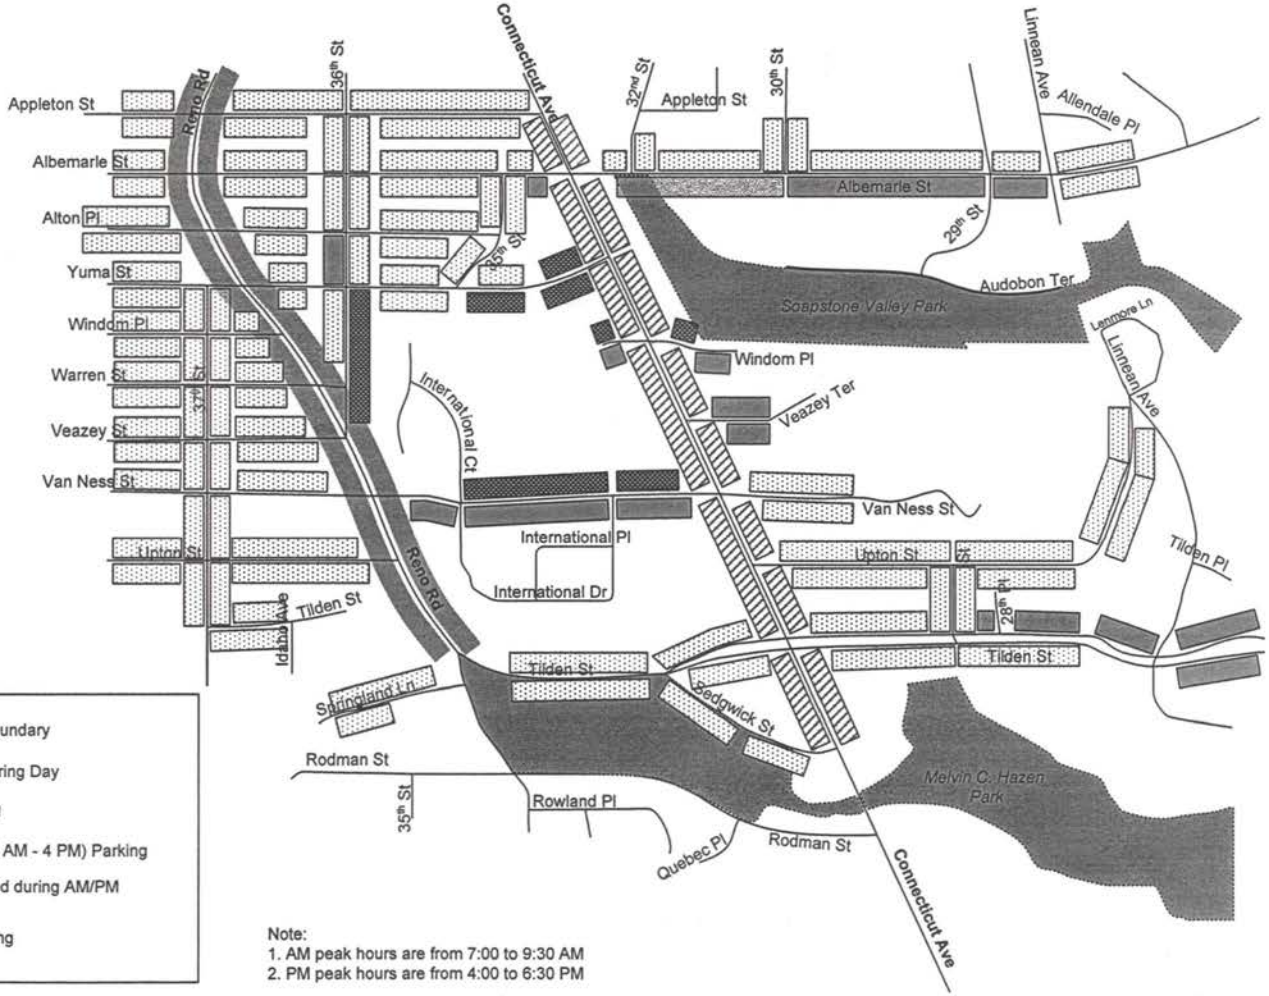

LEGEND

- Study Area Boundary
- No Parking during Day
- All day parking
- Off-peak (9:30 AM - 4 PM) Parking
- A/P — Parking allowed during AM/PM peak hours
- Metered Parking

Note:
1. AM peak hours are from 7:00 to 9:30 AM
2. PM peak hours are from 4:00 to 6:30 PM

Scale: 1" = 785'		Connecticut Avenue Transportation Study	Daytime Parking Inventory	FIGURE 18
June 2003				

throughout the day. Parking utilization rates were very high on both sides of Van Ness Street east of Connecticut Avenue. All 43 metered parking spaces on westbound Van Ness Street from Connecticut Avenue to International Drive were occupied during the survey periods. Parking spaces were full on both sides of Upton Street from Connecticut Avenue to 29th Street throughout the entire day. Parking utilization was moderate to very high on both sides of Tilden Street from 29th Street to Reno Road.

In general, parking utilization is very high on and near Connecticut Avenue, where the greatest parking-generating land uses are located. The parking utilization rate reduces from moderate to low as one travels further away from Connecticut Avenue.

While on-street parking utilization is very high on and near Connecticut Avenue, there does not appear to be any need to supplement the existing parking available in the immediate area. During peak parking demand periods, parking spaces on side streets – where parking utilization is moderate to low – are used as a supplement to the available parking resources on and near Connecticut Avenue.


EXISTING LEVELS OF SERVICE

The Consultant used SYNCHRO, a traffic modeling/analysis program, to evaluate existing traffic conditions in the study area. For the evaluation, the Consultant entered existing traffic volumes, lane configurations, pedestrian volumes and signal timings into SYNCHRO to develop a base case, existing conditions model. SimTraffic, SYNCHRO's associated traffic simulation software, was used to assist in the development of a model that accurately replicates existing conditions.

The Consultant used the SimTraffic software results to calculate levels of service (LOS) and the delay per vehicle for the thirteen intersections in the study area. All of the intersections except Reno Road at Yuma street, Connecticut Avenue at Upton Street, Albemarle Avenue at Linnean Avenue, and Tilden Street at Linnean Avenue are signalized intersections. The LOS evaluation uses a six-letter grade scale (A to F) to rank the overall traffic handling ability of an intersection or a network based on delay/vehicle. LOS A indicates excellent traffic operations with minimal delays. LOS F represents failing conditions with long delays. Levels of service E and F are generally considered undesirable. Appendix F provides a description of the different levels of service and their associated delays for both signalized and unsignalized intersections.

The Consultant analyzed Connecticut Avenue traffic for AM and PM peak hour, while reversible lane operation is in effect on Connecticut Avenue. In addition, traffic was also analyzed for weekday evening peak (6:30 – 7:30 PM) and the Saturday midday peak hour, when Connecticut Avenue operates with two lanes in each direction with parking allowed on both sides of the road.

As seen in Figure 19, during the AM peak hour all the intersections on Connecticut Avenue operate at LOS C or better except the intersection of Connecticut Avenue and Tilden Street, which operates at LOS D with long westbound queues. LOS D indicates

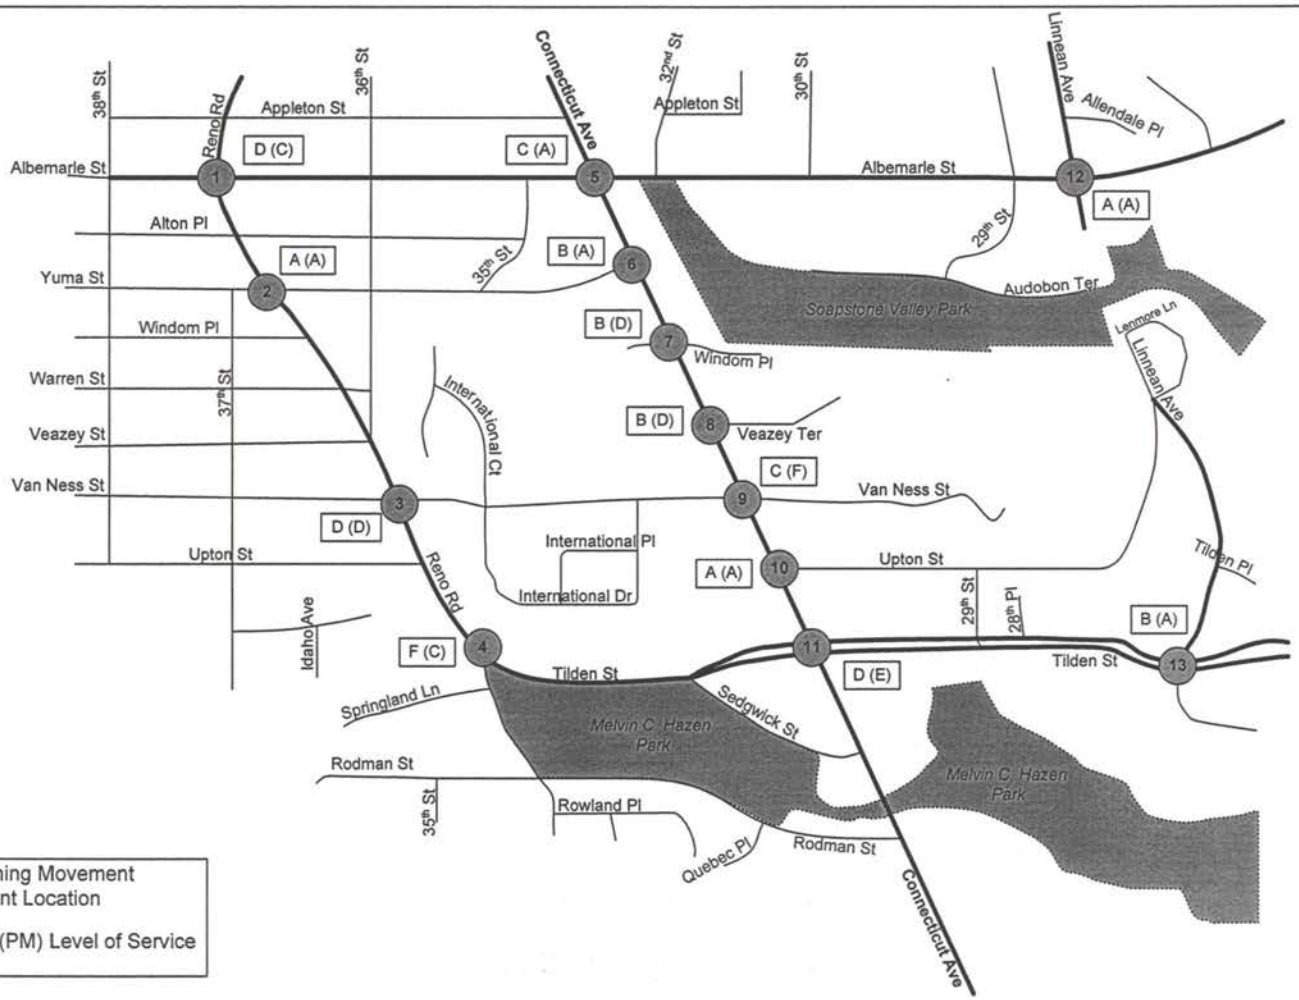


Scale: 1" = 785'		Connecticut Avenue Transportation Study	Existing AM and PM Peak Hour Levels of Service (LOS)	FIGURE 19
June 2003				

that the existing traffic volumes are approaching the capacity at the intersection and traffic delays are approaching undesirable levels. In addition, all the peripheral signalized intersections in the study area operate at LOS D except Reno Road and Tilden Street, which operates at LOS F.

During the PM peak hour all intersections on Connecticut Avenue operate at LOS D or better except the intersections with Tilden Street and Van Ness Street, which operate at LOS E and F, respectively. Van Ness Street has long queues for eastbound left turns, whereas Tilden Street has long westbound queues. In addition, all peripheral signalized intersections along Reno Road in the study area operate at LOS D or better.

The intersections on Connecticut Avenue were also analyzed during weekday evening (6:30 PM – 7:30 PM) and Saturday peak hours, as shown in Figure 20. The intersections of Connecticut Avenue with Veazey Terrace and Van Ness Street are operating at LOS E during the evening peak hour with long queues in all directions. All other intersections on Connecticut Avenue operate at LOS D or better during the same time period. Since parking is allowed on both sides of Connecticut Avenue during evening hours and weekends, the reduction in the number of available traffic lanes and the friction between parking and through vehicles reduces the capacity of the roadway and affects traffic operations. The Saturday peak hour analysis indicates that all intersections on Connecticut Avenue operate at LOS D or better. In some cases spill back traffic was observed in both directions of Connecticut Avenue between Albemarle Street and Van Ness Street during evening and Saturday peak hours.

The Consultant used the existing levels of service to identify locations where future improvements - such as signalization, changes in signal timing/phasing and additional lanes – could be implemented. These issues are described in Section IV of this report.

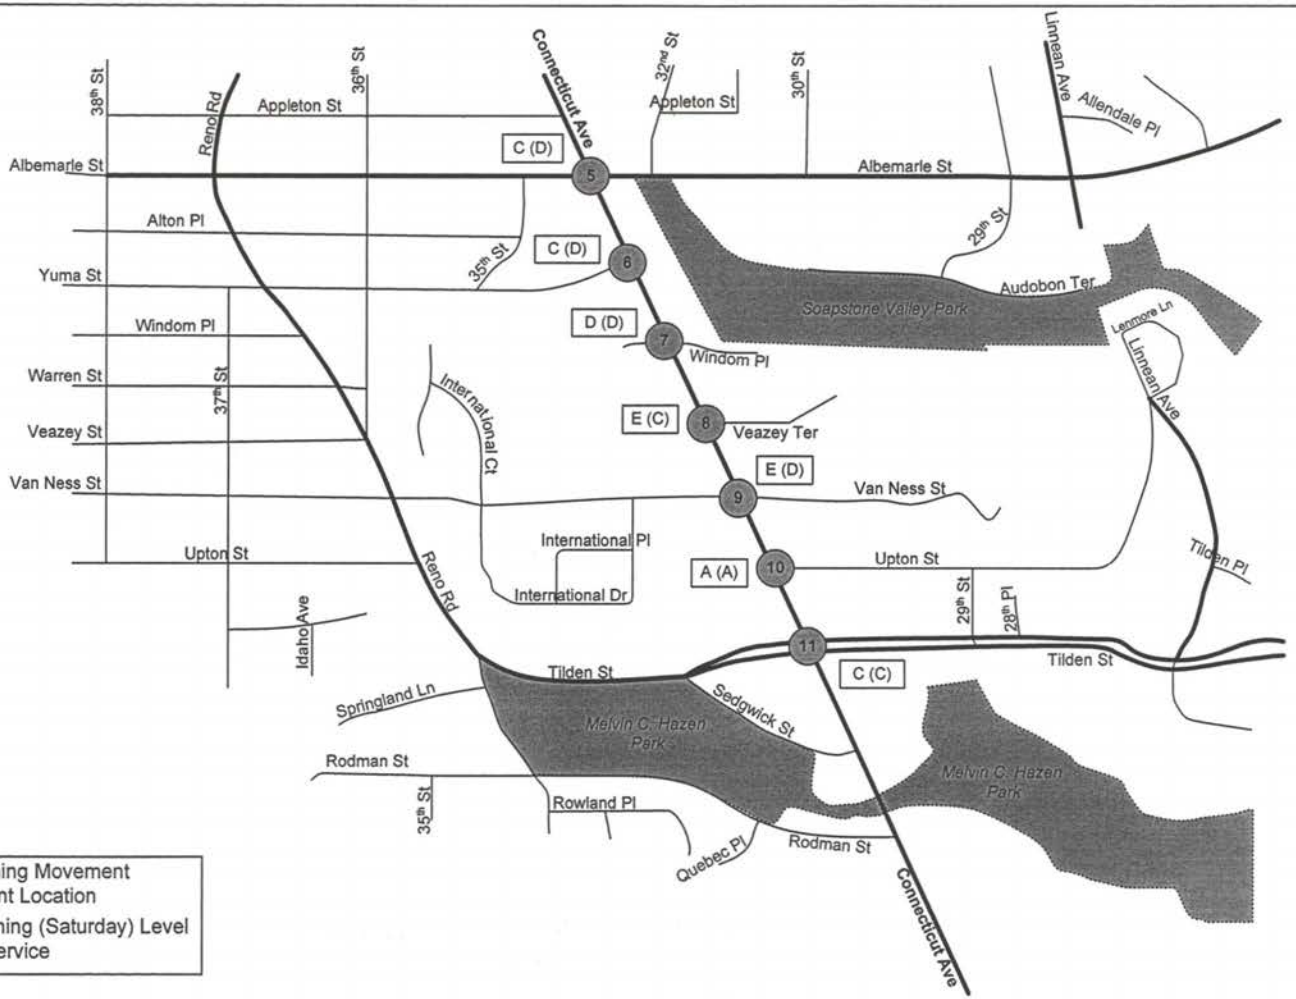

Scale: 1" = 785'		Connecticut Avenue Transportation Study	Existing Evening and Saturday Peak Hour Levels of Service (LOS)	FIGURE 20
June 2003				

III. FUTURE CONDITIONS

The Study Team evaluated future conditions taking into consideration growth in background traffic and traffic generated by new and proposed developments in the study area. The background traffic and new development traffic was added to existing traffic counts to determine future traffic volumes.

BACKGROUND GROWTH

The calculated growth rate used for background traffic was 1.0 percent per year. This rate accounts for regional growth as well as significant development growth in the area adjacent to the study area.

BACKGROUND TRAFFIC VOLUMES

All balanced traffic volumes were grown by 1.0 percent per year to determine background traffic volumes for the year 2012, the chosen future analysis year for the Connecticut Avenue Transportation Study. Figures 21 and 22 show 2012 background levels of traffic for AM and PM peak hours and for weekday evenings (6:30-7:30 PM) and Saturdays, respectively.


LEVELS OF SERVICE WITH BACKGROUND TRAFFIC


Using the Synchro traffic analysis software, the Study Team evaluated traffic conditions at the thirteen intersections within the study area for 2012 conditions with background traffic. SimTraffic, Synchro's associated traffic simulation software, was used to assist in the development of a model depicting expected future traffic conditions with background traffic.

The Study Team used the SimTraffic results to calculate LOS and the delay per vehicle for the intersections in the study area for the AM and PM peak hours. Additionally, the seven studied intersections along Connecticut Avenue were also analyzed for the evening (6:30-7:30 PM) and Saturday midday peak hours.

It can be seen in Figures 23 and 24 that as expected, levels of service will degrade in 2012 with the projected growth in background traffic. Most intersections degrade by one letter grade, although there are some locations where no degradation is expected and other locations where LOS degrades by two letter grades.

Few intersections are expected to operate at LOS F during the AM or PM peak hours. These intersections are Reno Road and Van Ness Street (AM), Reno Road and Tilden Street (AM), Connecticut Avenue and Van Ness Street (PM) and Connecticut Avenue and Tilden Street (PM). Reno and Tilden (AM) and Connecticut and Van Ness (PM) are currently operating at LOS F under existing conditions.

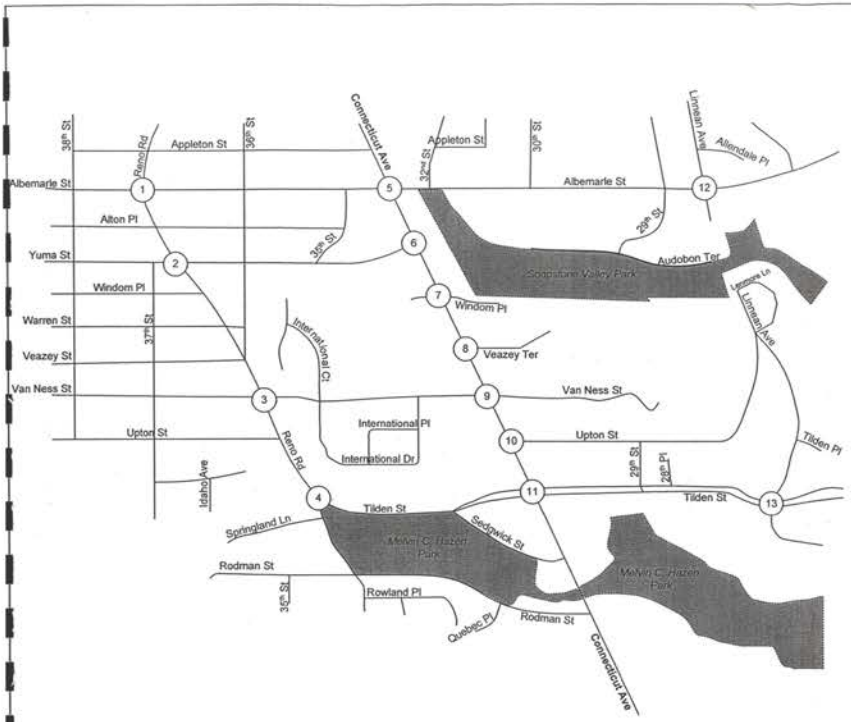


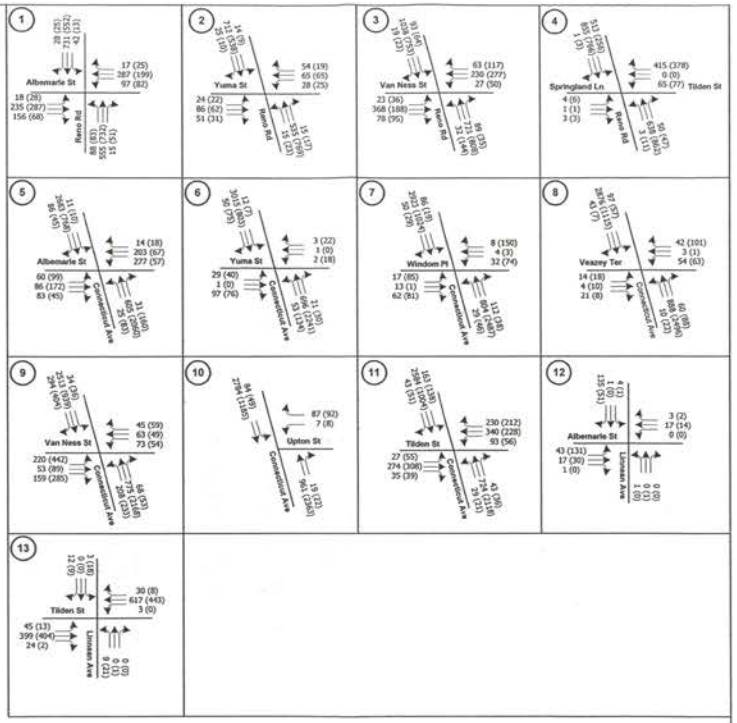

LEGEND:

385	AM Peak Hour Volume
(456)	PM Peak Hour Volume


Scale: 1" = 785' June 2003	N	Connecticut Avenue Transportation Study	**2012 Weekday Peak Hour Background Volumes**	**FIGURE 21**

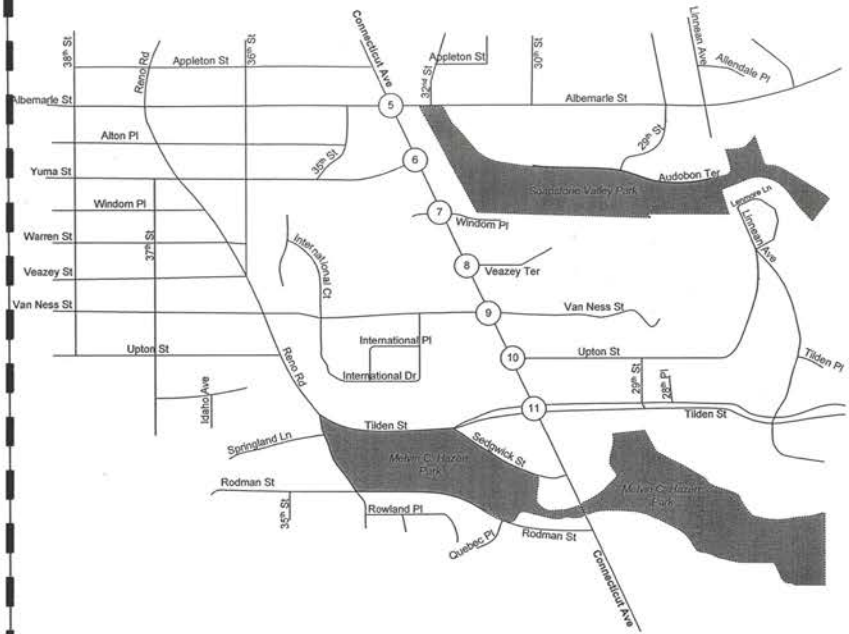


LEGEND:

385 Evening (6:30-7:30 PM) or Saturday Peak Hour Volume


EVENING TRAFFIC VOLUMES

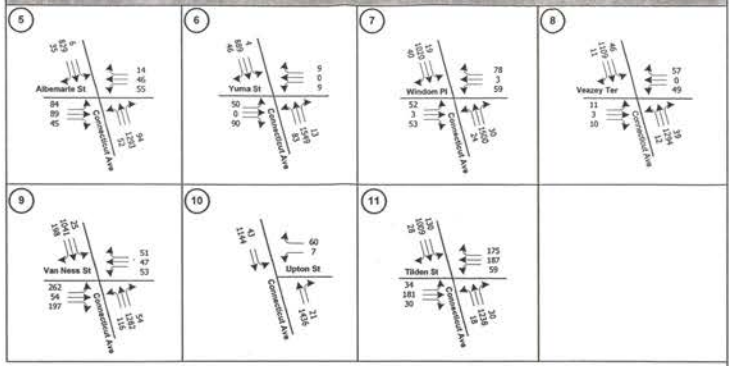


SATURDAY PEAK HOUR TRAFFIC VOLUMES

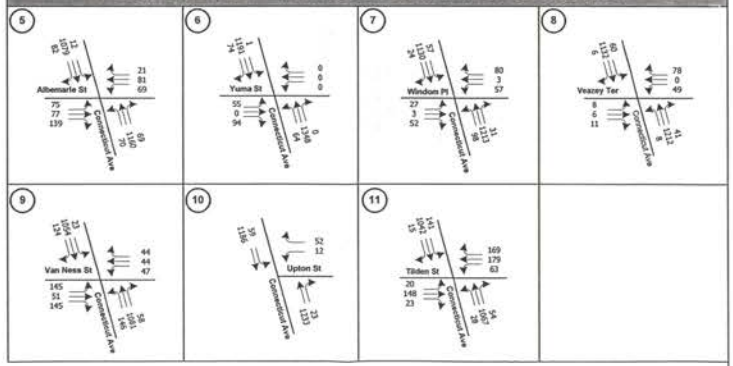

Scale: 1" = 785' June 2003	N	Connecticut Avenue Transportation Study	**2012 Weekday Evening (6:30-7:30 PM) and Saturday Peak Hour Background Volumes**	**FIGURE 22**

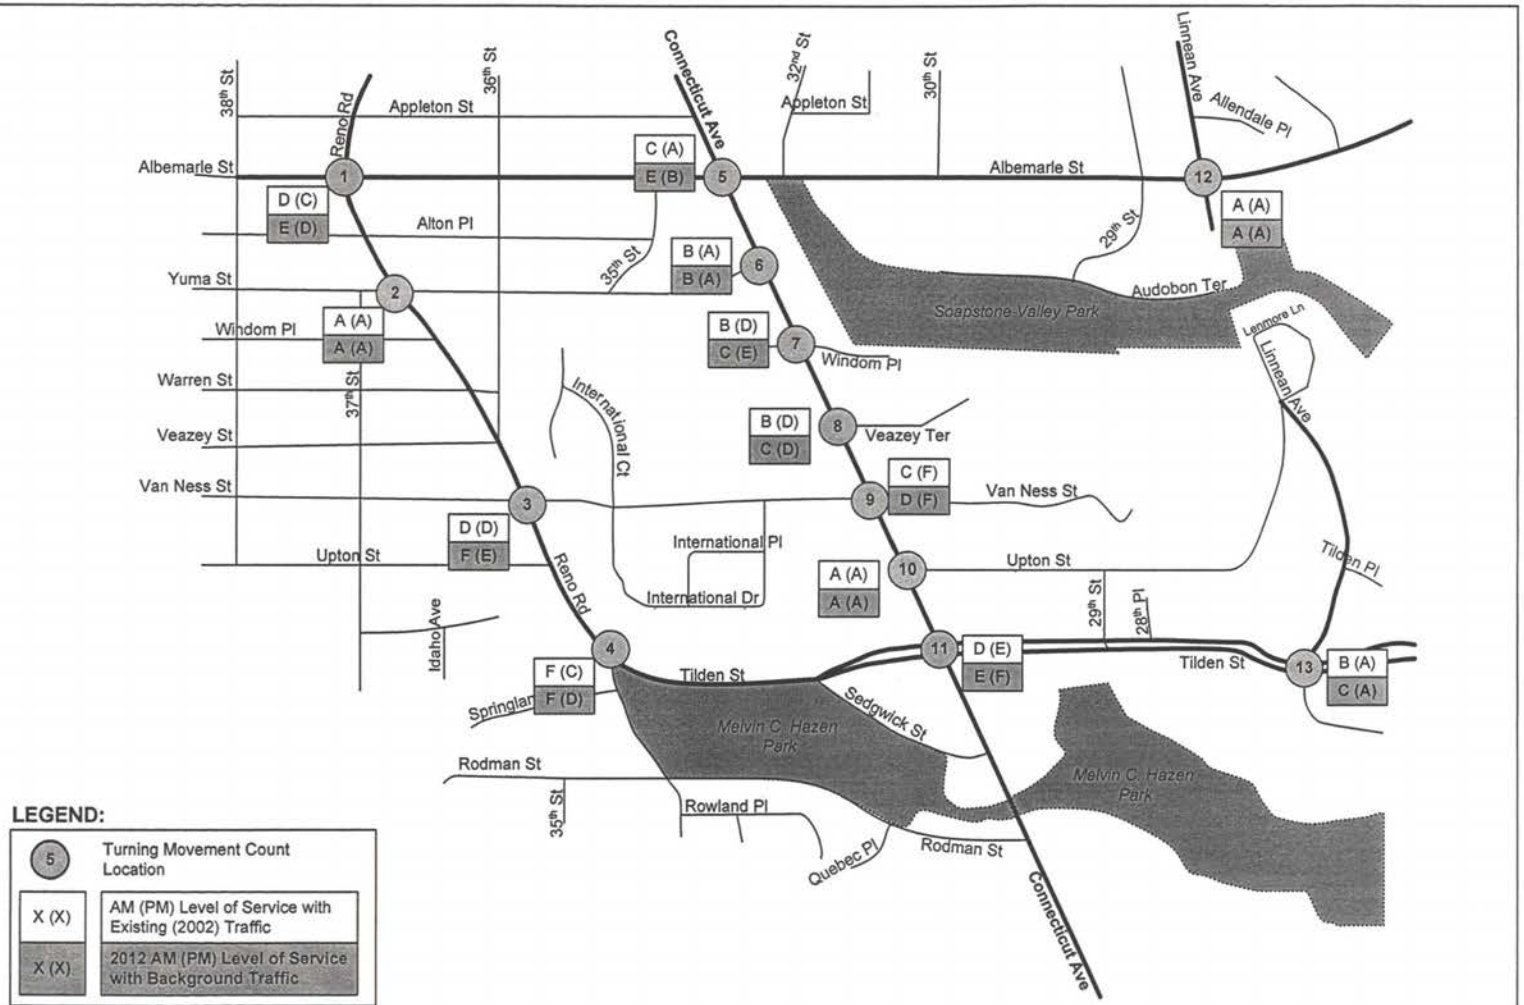

Scale: 1" = 785'		Connecticut Avenue Transportation Study	AM and PM Peak Hour Levels of Service (LOS) with Background Traffic	FIGURE 23
June 2003				

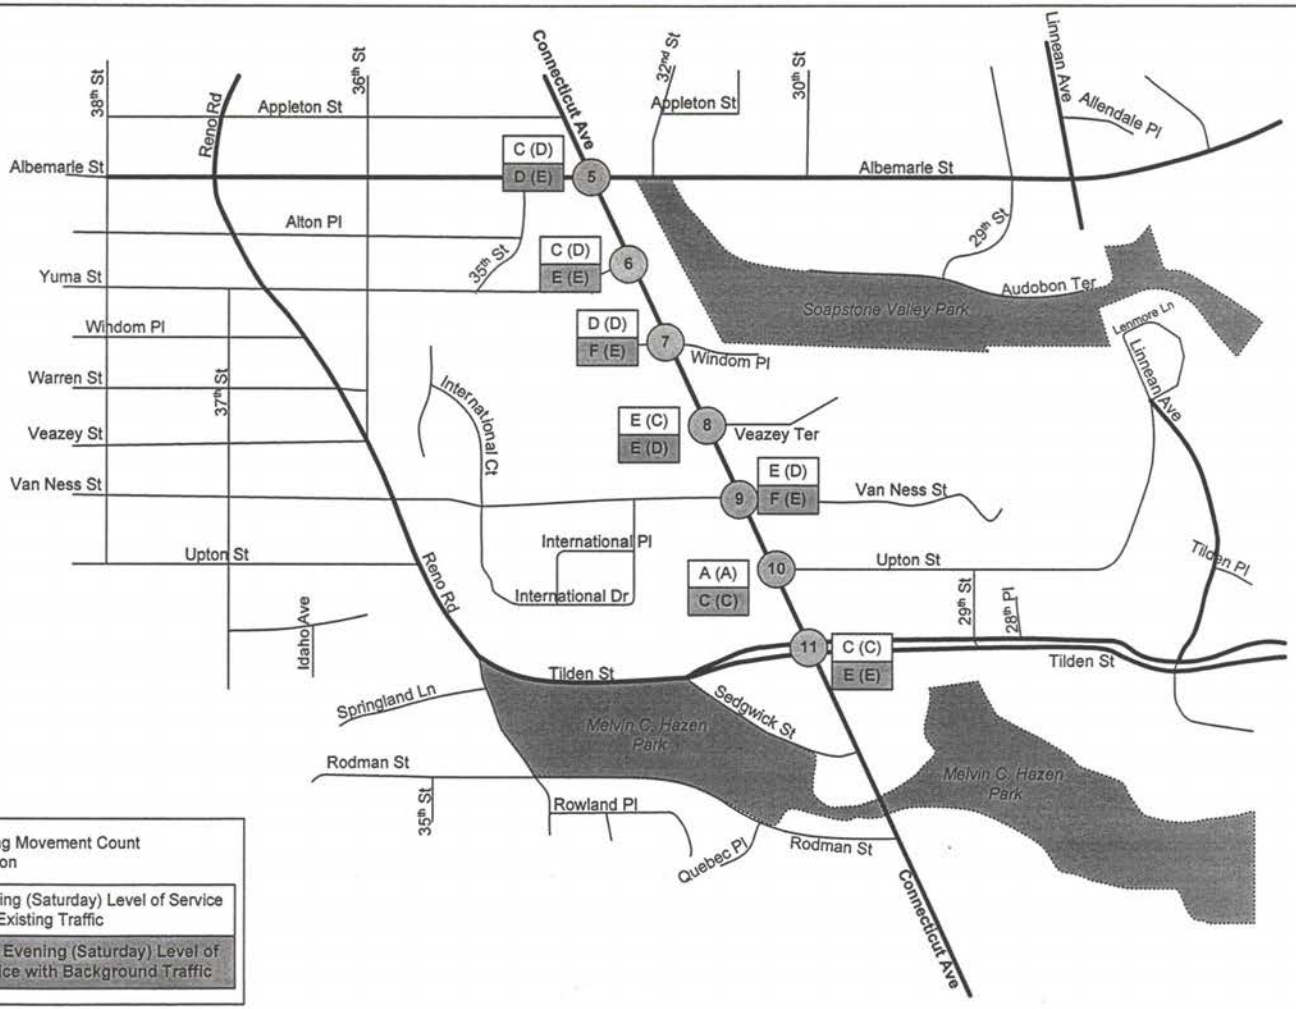

Scale: 1" = 785' June 2003	N	Connecticut Avenue Transportation Study	**Evening and Saturday Peak Hour Levels of Service (LOS) with Background Traffic**	**FIGURE 24**

At the intersections of Reno Road and Tilden Street (AM) and Connecticut Avenue and Van Ness Street (PM), the increase in background growth, while causing the intersections to remain at LOS F, is expected to increase overall per-vehicle delay at these intersections by approximately 38 percent and 26 percent, respectively.

During the evening peak hour, all studied intersections on Connecticut Avenue will drop at least one letter grade, with the following intersections expected to operate at LOS F: Connecticut Avenue with Van Ness Street and Tilden Street. No intersections are expected to operate at LOS F during the Saturday peak hour, although all will degrade by at least one letter.

DEVELOPMENT TRAFFIC

With the assistance of area residents and the District of Columbia Office of Planning, the Study Team identified three new or proposed developments within the study area. These developments are as follows:

1. Sheridan School – Located at 4400 36th Street (between Yuma Street and Alton Place). This private school currently has 215 students in grades kindergarten through eight. The school is seeking to increase its enrollment to 226 students, although no submission has yet been made to the Board of Zoning Adjustment of the District of Columbia (BZA).
2. Edmund Burke School – Located at 2955 Upton Street (between Connecticut Avenue and 29th Street). This private school currently has 295 students in grades six through twelve. An application submitted on April 15, 2003 to the BZA seeks to increase enrollment of the school to 320 students (from a current total of 295) and to increase faculty to 70 (from a current total of 55).
3. 3883 Connecticut Avenue – nine-story, 166-unit residential development located on the east side of Connecticut Avenue between Sedgwick and Tilden Streets. As of the time of this study, 3883 Connecticut Avenue has been completed and is currently leasing.

TRIP GENERATION FOR OTHER AREA DEVELOPMENTS

Table 7 summarizes AM and PM peak hour traffic volume forecasts for area developments, as well as daily traffic. Table 8 summarizes evening (6:30-7:30 PM) and Saturday peak hour. Since the two schools are not expected to generate any evening peak hour or Saturday trips, only those trips generated by 3883 Connecticut Avenue are shown in Table 8. Trip generation rates for area developments were calculated based on available land use information and applying trip generation rates from the Institute of Transportation Engineers (ITE) *Trip Generation Manual, 6th Edition*. Additionally, the numbers of trips were adjusted to account for transit usage based on information found in *Development Related Ridership Survey II*, published by WMATA.

For the Sheridan and Edmund Burke Schools, trips were generated based on the proposed increase in student enrollment – 11 students for Sheridan and 25 students for Burke.

Table 7
Summary of AM and PM Peak Hour Trip Generation for Area Developments[1]

No.	Development	AM Peak Hour Trips IN	AM Peak Hour Trips OUT	AM Peak Hour Trips TOTAL	PM Peak Hour Trips IN	PM Peak Hour Trips OUT	PM Peak Hour Trips TOTAL	Daily Trips (two-way)
1	Sheridan School	6	4	10	3	4	7	N/A[2]
	Transit Reduction = 0%	*(0)*	*(0)*	*(0)*	*(0)*	*(0)*	*(0)*	
	Net Trips	6	4	**10**	3	4	**7**	
2	Edmund Burke School	14	9	23	7	9	16	N/A[2]
	Transit Reduction = 19%	*(3)*	*(2)*	*(5)*	*(1)*	*(2)*	*(3)*	
	Net Trips (See Note 2)	11	7	**18**	6	7	**13**	
3	3883 Connecticut Ave.	15	62	77	45	27	72	650
	Transit Reduction = 44%	*(7)*	*(27)*	*(34)*	*(20)*	*(12)*	*(32)*	*(286)*
	Net Trips	8	35	**43**	25	15	**40**	**364**
Total Other Development Traffic		25	46	61	34	26	60	364

Notes:

1. The Table *"Trip Generation For Area Development,"* included in Appendix H, presents more details on the square footage and number of units used in the calculations. It also presents detailed information on the ITE Trip Generation rates used in the calculations.

2. ITE provides no daily trip generation info for "Private School (K-12)" land use.

Table 8
Summary of Evening and Saturday Peak Hour Trip Generation for Area Developments[1]

No.	Development	Evening (6:30 – 7:30 PM) Peak Hour Trips IN	Evening (6:30 – 7:30 PM) Peak Hour Trips OUT	Evening (6:30 – 7:30 PM) Peak Hour Trips TOTAL	Saturday Peak Hour Trips IN	Saturday Peak Hour Trips OUT	Saturday Peak Hour Trips TOTAL	Saturday Daily Trips (two-way)
	3883 Connecticut Ave.	45	27	72	26	35	61	852
	Transit Reduction = 44%	*(20)*	*(12)*	*(32)*	*(11)*	*(15)*	*(26)*	*(375)*
3	Sub-Total	25	15	40	15	20	35	477
	Evening Reduction = 27%[2]	*(7)*	*(4)*	*(11)*	*(N/A)*	*(N/A)*	*(N/A)*	*(N/A)*
	Net Trips	18	11	**29**	15	20	**35**	**477**
Total Area Development Traffic		18	11	29	15	20	35	477

Notes:

1. The Table *"Trip Generation For Area Development,"* included in Appendix H, presents more details on the square footage and number of units used in the calculations. It also presents detailed information on the ITE Trip Generation rates used in the calculations.

2. 6:30 – 7:30 PM volume at the intersection of Connecticut Avenue and Tilden Street is 73 percent of the peak hour volume. Evening trips were calculated by taking 73 percent of the peak hour trip generation numbers for 3883 Connecticut Avenue.

TRIP DISTRIBUTIONS AND ASSIGNMENTS FOR AREA DEVELOPMENTS

Trips for the Sheridan School and 3883 Connecticut Avenue were distributed throughout the study area based on existing traffic patterns. Trip distribution for the Edmund Burke School was based on patterns described the "Edmund Burke School Transportation Management Plan Washington, D.C."[1] (TMP) The Study Team conducted an evaluation of the Burke TMP and concluded that the traffic distributions used in the TMP accurately reflect the traffic conditions that can be expected if their submission is accepted by the BZA and their proposed changes are implemented.

The Study Team assigned the trips to the network based on the distributions described above. Estimated 2012 trip assignments are summarized in Figures 25 and 26. The intersection of Connecticut Avenue and Upton Street is expected to see the greatest increase in the number of vehicles of any study area intersection, with an additional 75 vehicles during the AM peak hour and 41 vehicles during the PM peak hour. With the exceptions of the two intersections on Linnean Avenue, the remaining studied intersections are expected to increase by approximately 15 to 40 vehicles during the AM peak hour and three to 40 vehicles during the PM peak hour. As Figure 25 shows, there are individual movements at several intersections where traffic volumes actually decrease. This reduction in traffic is due to the proposed Burke TMP, which would result in changes to the traffic patterns used by students and faculty. In most cases, a reduction in volume for one movement at an intersection is offset by an increase elsewhere and is reflected in the overall increase in Burke Traffic (18 trips in the AM peak and 13 trips in the PM peak, as noted above).

Evening peak hour trips on Connecticut Avenue are expected to increase by approximately ten trips per intersection, while the increase in Saturday peak hour trips will range from approximately ten to twenty.


TOTAL TRIP ASSIGNMENTS


In order to forecast the total number of vehicular trips that are expected to travel through the study area during the forecast year of 2012, the Study Team added the following layers of traffic volumes:

1. Existing traffic
2. Growth in background traffic
3. Trips generated by developments within the study area

Figures 27 and 28 respectively show total volumes for the study area for the AM and PM peak hours, and for the evening and Saturday peak hours.

[1] Wells & Associates, LLC, April 14, 2003

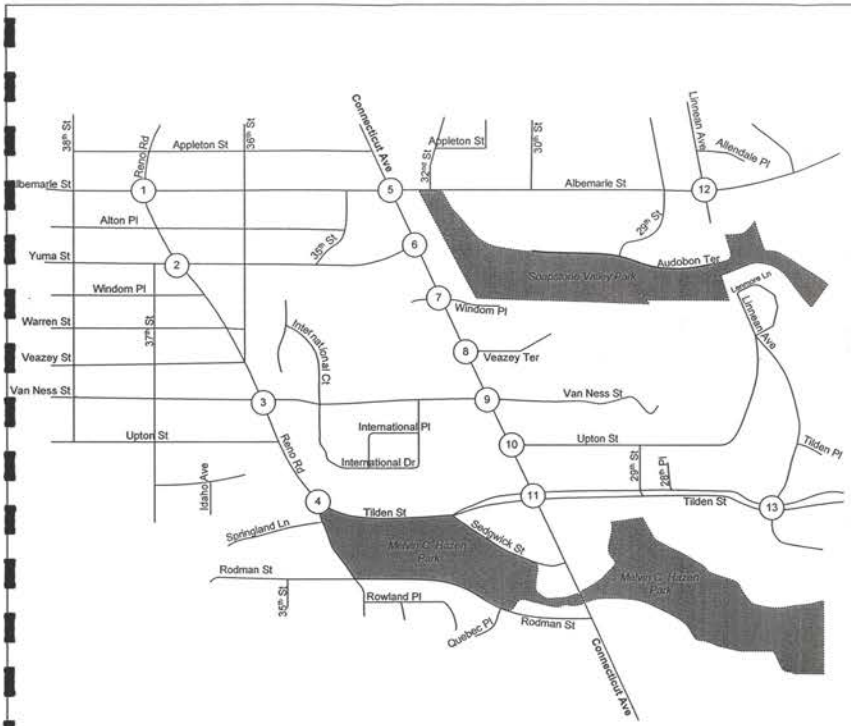


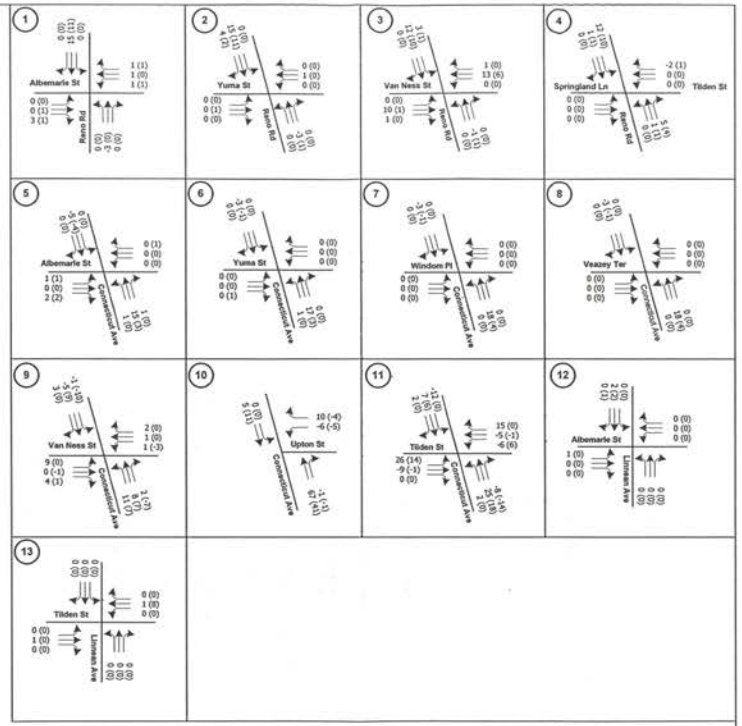

LEGEND:

385	AM Peak Hour Volume
(456)	PM Peak Hour Volume


Scale: 1" = 785' June 2003	N	Connecticut Avenue Transportation Study	**2012 Weekday Peak Hour Site Traffic Volumes**	**FIGURE 25**

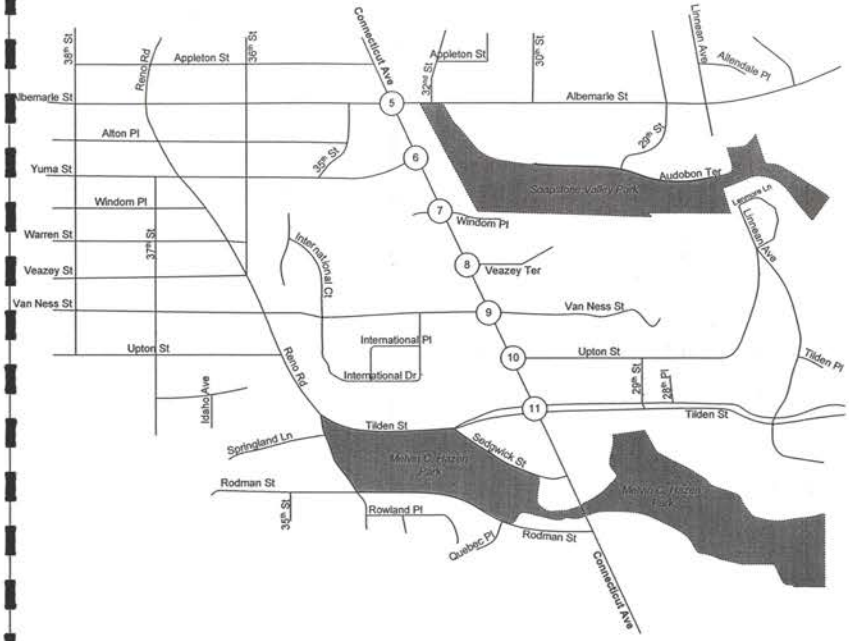


LEGEND:

385 EVENING (6:30-7:30 PM) OR SATURDAY VOLUME


WEEKDAY EVENING TRAFFIC VOLUMES

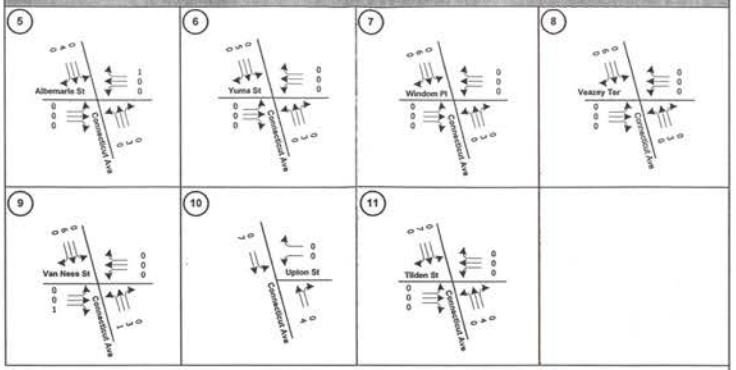


SATURDAY PEAK HOUR TRAFFIC VOLUMES

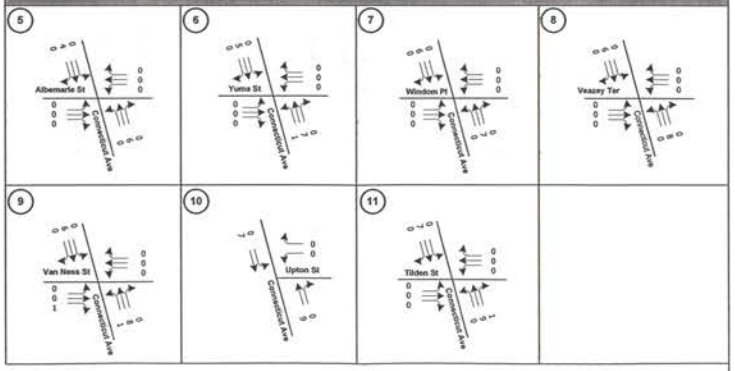

Scale: 1" = 785' June 2003	N	Connecticut Avenue Transportation Study	**2012 Weekday Evening (6:30-7:30 PM) and Saturday Peak Hour Site Traffic Volumes**	**FIGURE 26**

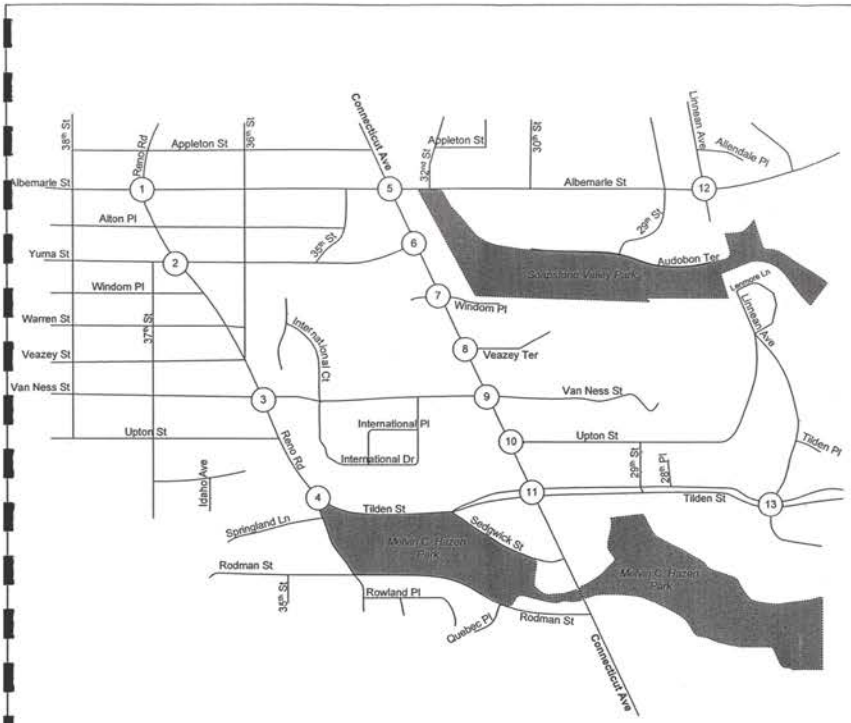


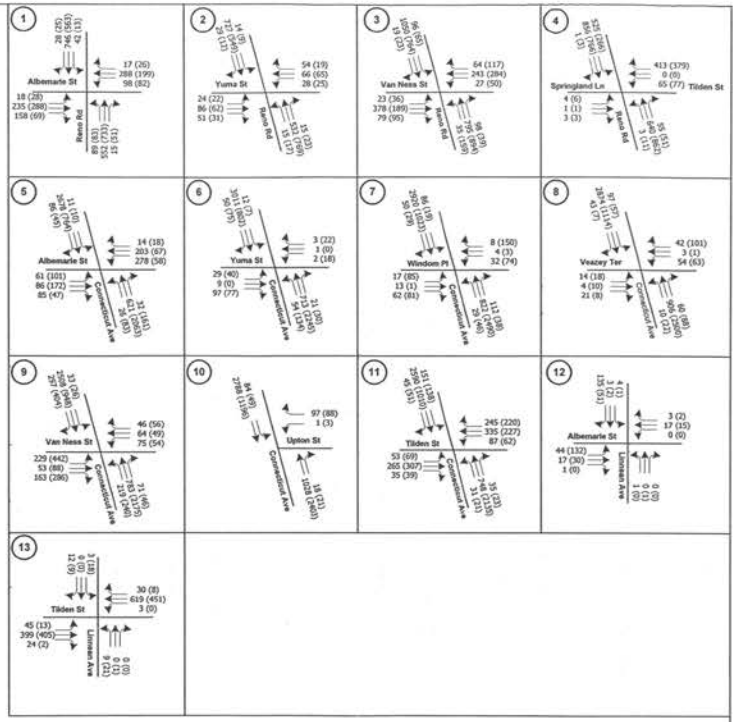

LEGEND:

385	AM Peak Hour Volume
(456)	PM Peak Hour Volume


Scale: 1" = 785' June 2003	N	Connecticut Avenue Transportation Study	**2012 Total Weekday Peak Hour Traffic Volumes**	FIGURE 27

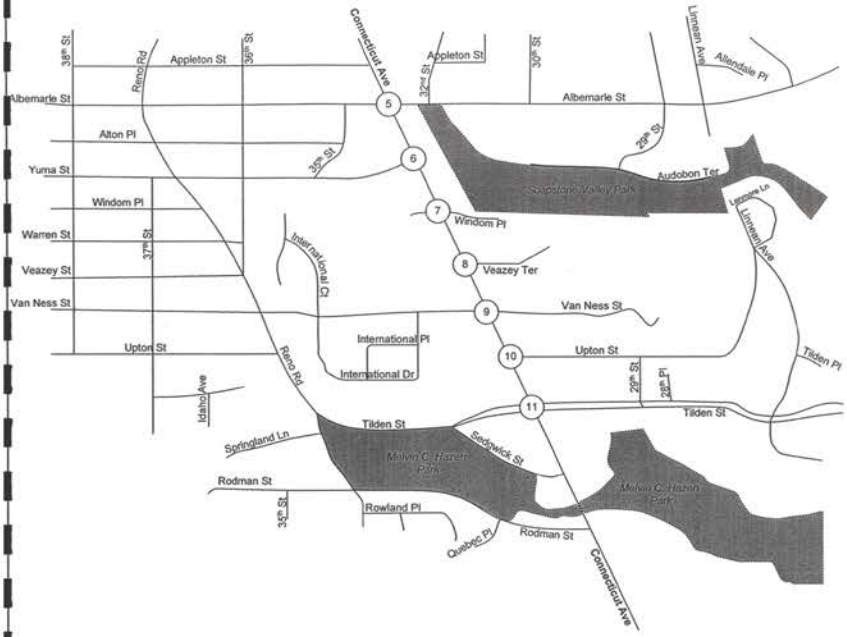


LEGEND:

385 EVENING (6:30-7:30 PM) OR SATURDAY VOLUME

WEEKDAY EVENING TRAFFIC VOLUMES

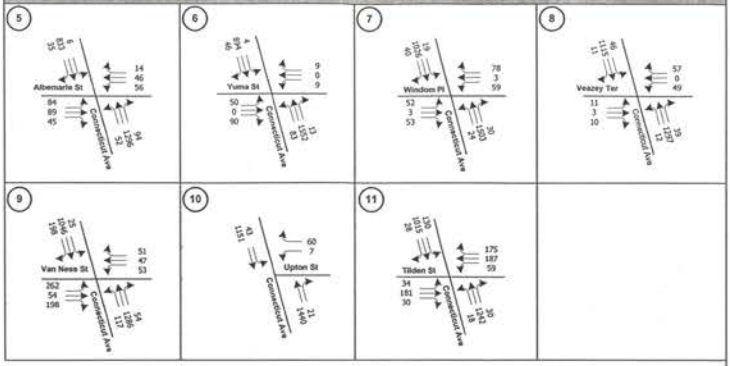

SATURDAY PEAK HOUR TRAFFIC VOLUMES

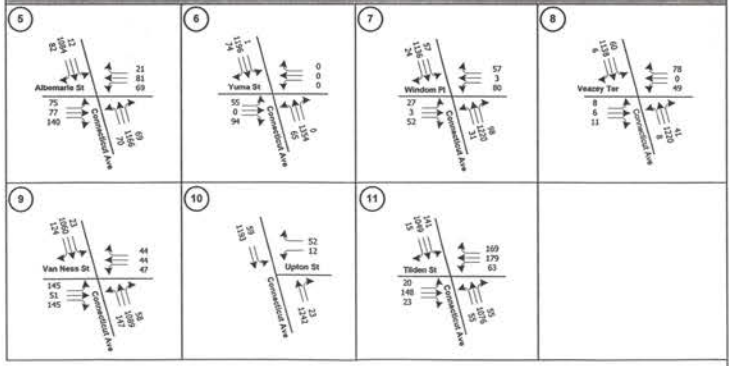

Scale: 1" = 785' June 2003	N	Connecticut Avenue Transportation Study	**2012 Total Weekday Evening (6:30-7:30 PM) and Saturday Peak Hour Traffic Volumes**	**FIGURE 28**

SITE IMPACTS

The Study Team evaluated the impacts of development traffic on the study area intersections. Site impacts indicate what proportion of the forecast total traffic at a particular intersection is generated by new site traffic. The Study Team calculated site impacts by dividing the additional development-generated traffic by the total forecast traffic at each intersection.

Site impacts of less than five percent are low and generally reflect negligible effects on traffic operations and delays. Site impacts between five and 15 percent are moderate and minor effects on traffic operations and delays are expected at intersections with site impacts at these levels. Site impacts of more than 15 percent are significant and generally result in significant degradation of traffic operations and increased delays. The intersections most affected by the site traffic are those located in the immediate vicinity of the development sites. Site impacts generally decrease with increased distance to the site that generates the trips.

Table 9 shows that the intersection of Connecticut Avenue and Upton Street will be impacted the most by site traffic. The impact is expected be negligible, though, with only two percent of its overall volume caused by site traffic. No other intersection will see greater than a one percent impact, while a large number of intersections will experience such a small increase in site traffic that there is no percentage impact.

Table 9
Impact of Site Traffic on Area Intersections

Intersection	2012 AM Peak Hour Site Impact	2012 AM Peak Hour Site Impact	2012 Evening Peak Hour Site Impact	2012 Saturday Peak Hour Site Impact
1. Reno Road & Albemarle St.	1%	1%	N/A	N/A
2. Reno Road & Yuma St.	1%	1%	N/A	N/A
3. Reno Road & Van Ness St.	1%	1%	N/A	N/A
4. Reno Road & Tilden St.	1%	1%	N/A	N/A
5. Connecticut Ave. & Albemarle St.	0%	0%	0%	0%
6. Connecticut Ave. & Yuma St.	0%	0%	0%	0%
7. Connecticut Ave. & Windom Place	0%	0%	0%	0%
8. Connecticut Ave. & Veazey Terrace	0%	0%	0%	1%
9. Connecticut Ave. and Van Ness St.	1%	0%	0%	1%
10. Connecticut Ave. & Upton St.	2%	1%	0%	1%
11. Connecticut Ave. & Tilden St.	1%	1%	0%	1%
12. Linnean Ave. & Albemarle St.	1%	1%	N/A	N/A
13. Linnean Ave. & Tilden St.	0%	1%	N/A	N/A


N/A – intersections were not analyzed during evening or Saturday peak hours

FUTURE LEVELS OF SERVICE WITH DEVELOPMENT TRAFFIC

Using the Synchro traffic analysis software, the Study Team evaluated traffic conditions at the thirteen intersections within the study area for 2012 conditions with background and development traffic. SimTraffic, Synchro's associated traffic simulation software, was used to assist in the development of a model depicting expected future traffic conditions with background and development traffic.

The Study Team used the SimTraffic results to calculate LOS and the delay per vehicle for the intersections in the study area for the AM and PM peak hours. Additionally, the seven studied intersections along Connecticut Avenue were also analyzed for the evening (6:30-7:30 PM) and Saturday midday peak hours.


It can be seen in Figures 29 and 30 that the small amount of development traffic has very little effect on the LOS of the studied intersections. During the AM and PM peak hours, only two intersections experience degradation in LOS. Connecticut Avenue and Van Ness Street degrades from LOS D to LOS E during the AM peak hour, while Reno Road and Tilden Street degrades from LOS D to LOS E during the PM peak hour. Due to the degradation of Reno and Tilden, the adjacent intersection of Reno Road and Van Ness Street actually improves from LOS E to LOS D during the same PM peak hour. This is due to the increased delay at Reno and Tilden. Fewer vehicles can get through this intersection, resulting in decreased delays at the adjacent intersection. No changes in LOS are expected in either the evening or Saturday peak hours.

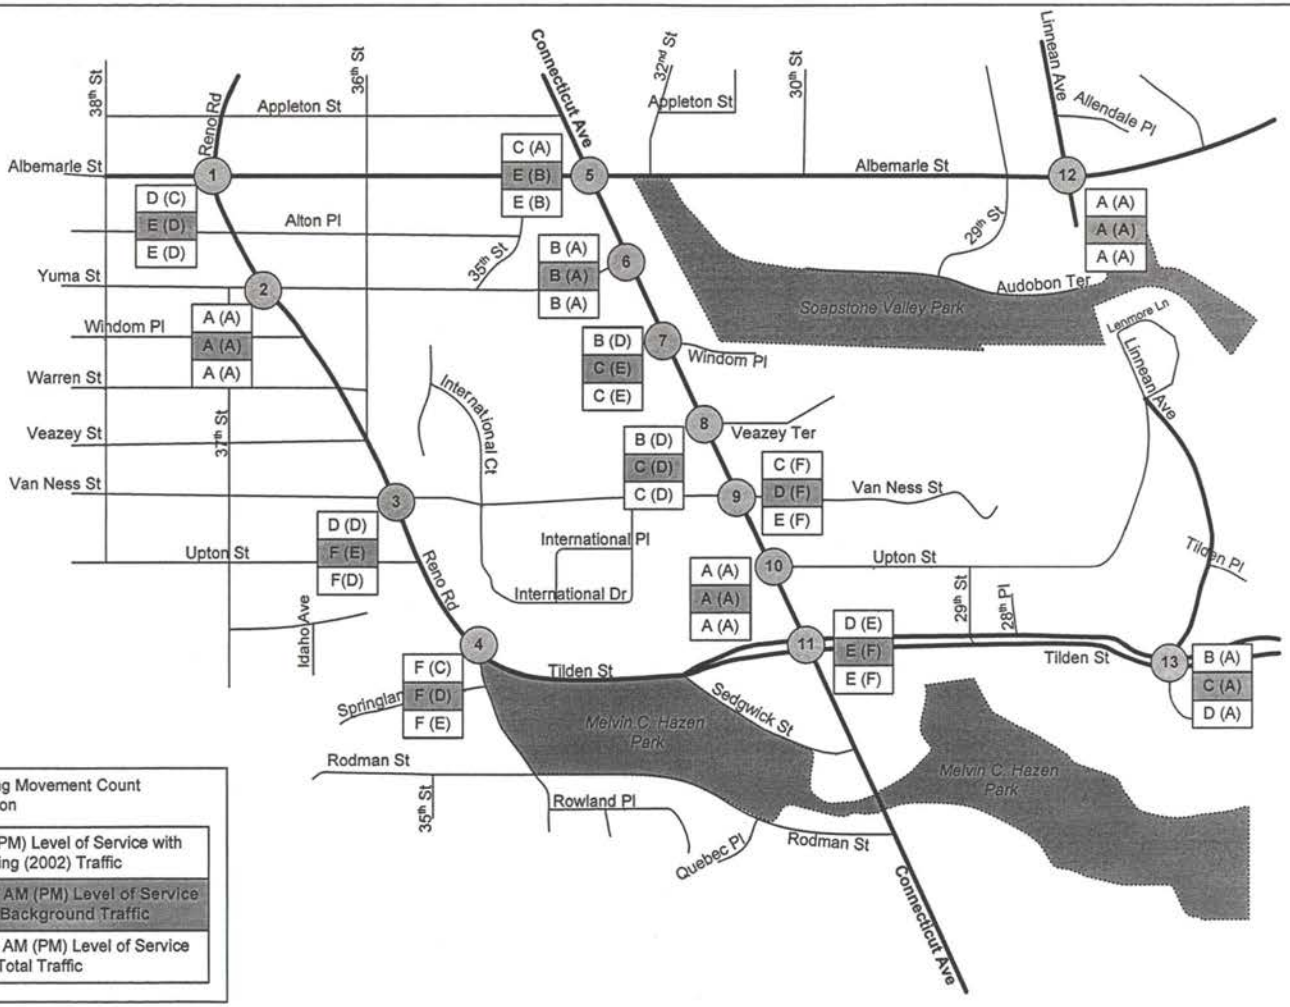

LEGEND:

5	Turning Movement Count Location
X (X)	AM (PM) Level of Service with Existing (2002) Traffic
X (X)	2012 AM (PM) Level of Service with Background Traffic
X (X)	2012 AM (PM) Level of Service with Total Traffic

Scale: 1" = 785'		Connecticut Avenue Transportation Study	**AM and PM Peak Hour Levels of Service (LOS) with Total Traffic**
June 2003			**FIGURE 29**

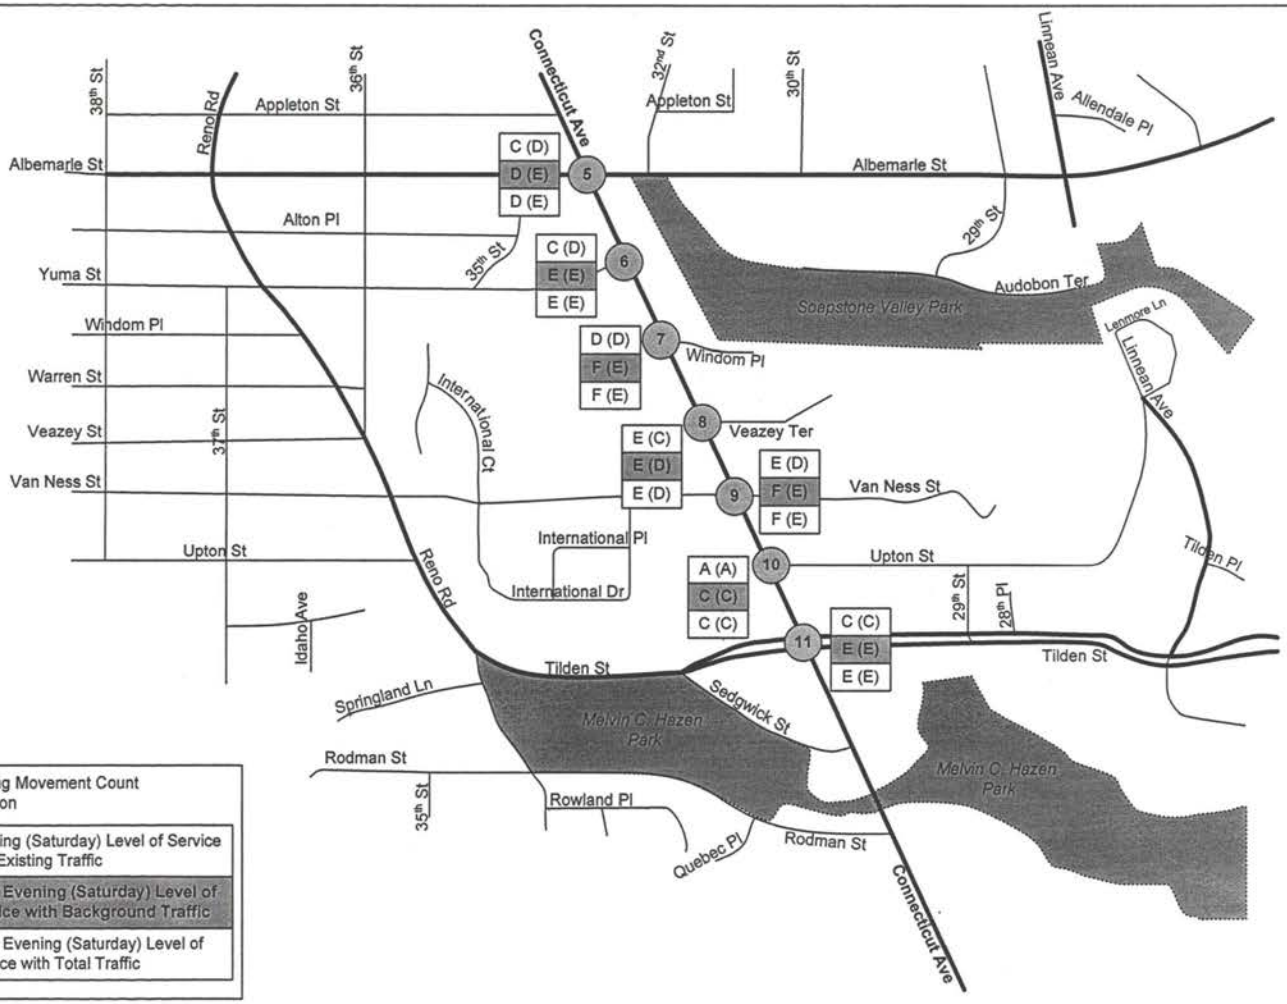

LEGEND:

5	Turning Movement Count Location
X (X)	Evening (Saturday) Level of Service with Existing Traffic
X (X)	2012 Evening (Saturday) Level of Service with Background Traffic
X (X)	2012 Evening (Saturday) Level of Service with Total Traffic

Scale: 1" = 785'	N	Connecticut Avenue Transportation Study	**Existing Evening and Saturday Peak Hour Levels of Service (LOS) with Total Traffic**	**FIGURE 30**
June 2003				