
Legend

- Indicates Existing Tree
- Indicates New Deciduous Tree
- Indicates New Evergreen Tree
- Indicates New Evergreen Tree to Replace an Existing Deciduous Tree
- Indicates Transplanted/Relocated Tree
- Indicates Existing Shrubs
- Indicates New Hedge

List of Plant Materials

Key	Qty	Botanical Name	Common Name	Size	Root	Remarks	Installation Notes
TREES							
AR	1	Acer rubrum 'Autumn Flame'	Red Maple	3" cal.	B&B	Full; limbed to 6' ht.	*One planted: 6.30.05*
AG	3	Amelanchier x grandiflora	Serviceberry	8-10' ht.	B&B	Multi-stem; 3 trunk min.	
CF	3	Cornus florida	Flowering Dogwood	8-10' ht.	B&B	Full; single trunk.	*One planted: 6.9.05*
CJ	5	Cryptomeria japonica	Japanese Cedar	6-8' ht.	B&B	Full to ground.	*One planted: 6.16.05*
CL	4	Cupressocyparis leylandii	Leyland Cypress	6-8' ht.	B&B	Full to ground.	*Two planted: 6.16.05*
IO	13	Ilex opaca	American Holly	5-6' ht.	B&B	Full to ground.	*Five planted: 6.16.05*
MV	3	Magnolia virginiana	Sweetbay Magnolia	10-12' ht.	B&B	Multi-stem; 3 trunk min.	
SHRUBS							
IN	13	Ilex x 'Nellie R. Stevens'	Nellie Stevens Holly	48" ht.	B&B	Full to ground.	*Eight planted: 6.30.05*
PL	20	Prunus laurocerasus 'Schipkaensis'	Skip Laurel	36" ht.	B&B	Full to ground.	
TM	14	Taxus x media 'Hicksii'	Hicks Yew	30" ht.	B&B	Full to ground.	
VINES							
LS	3	Lonicera sempervirens	Trumpet Honeysuckle	48" ht.	Cont.	5-Stem min.	
PQ	10	Parthenocissus quinquefolia	Virginia Creeper	48" ht.	Cont.	5-Stem min.	

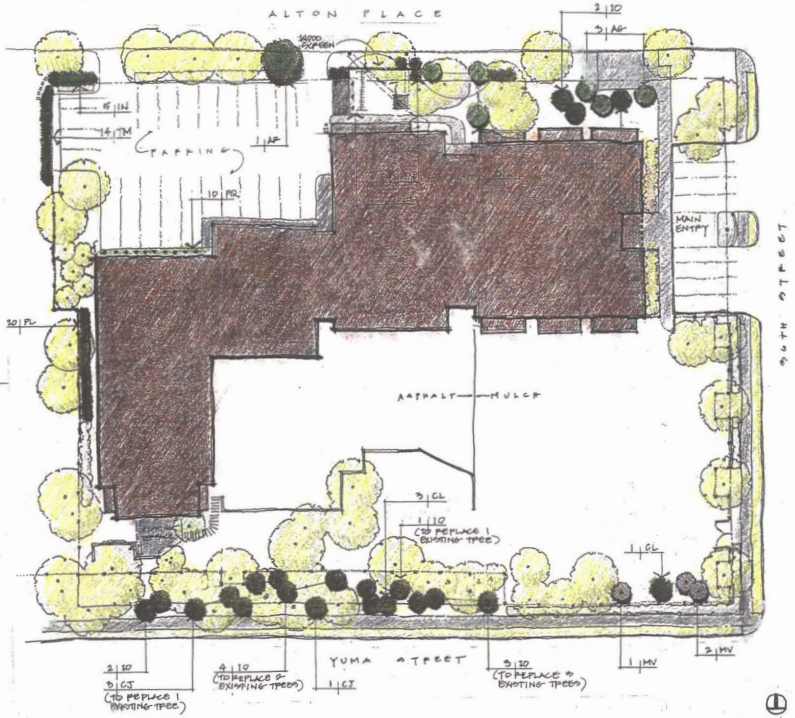

HICKOK WARNER FOX

ARCHITECTS

1023 31st Street, NW
Washington, DC 20007

Phone 202.667.9776
Fax 202.667.2560

SHERIDAN SCHOOL

ZONING APPLICATION

REVISIONS

SITE PLAN

PERIMETER LANDSCAPE PLAN

SCALE: AS NOTED

DATE: JULY 14, 2005

PROJECT NUMBER: 02036.00

P1

BZA
Case No. 16977
Exhibit No. 53